

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**TOTE #3 HYDREX AW 32 BLK**  
Component  
**New (Unused) Oil**  
Fluid  
**PETRO CANADA HYDREX AW 32 (--- GAL)**

## DIAGNOSIS

### Recommendation

Il s'agit du relevé de base de cette huile neuve (inutilisée). Le fluide peut servir.

### Contamination

La propreté du système est acceptable pour votre objectif de propreté ISO 4406. Il n'y a aucun indice de contamination dans le huile (inutilisée) neuve.

### Fluid Condition

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0079804</b>	---	---
Sample Date	Client Info			<b>12 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		<b>0</b>	---	---
Chromium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)		<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)		<b>0</b>	---	---
Lead	ppm	ASTM D5185(m)		<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)		<b>0</b>	---	---
Tin	ppm	ASTM D5185(m)		<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m)	50	<b>51</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	330	<b>336</b>	---	---
Zinc	ppm	ASTM D5185(m)	430	<b>433</b>	---	---
Sulfur	ppm	ASTM D5185(m)	760	<b>734</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<b>0</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*		<b>1.5</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*		<b>11.6</b>	---	---

# OIL ANALYSIS REPORT

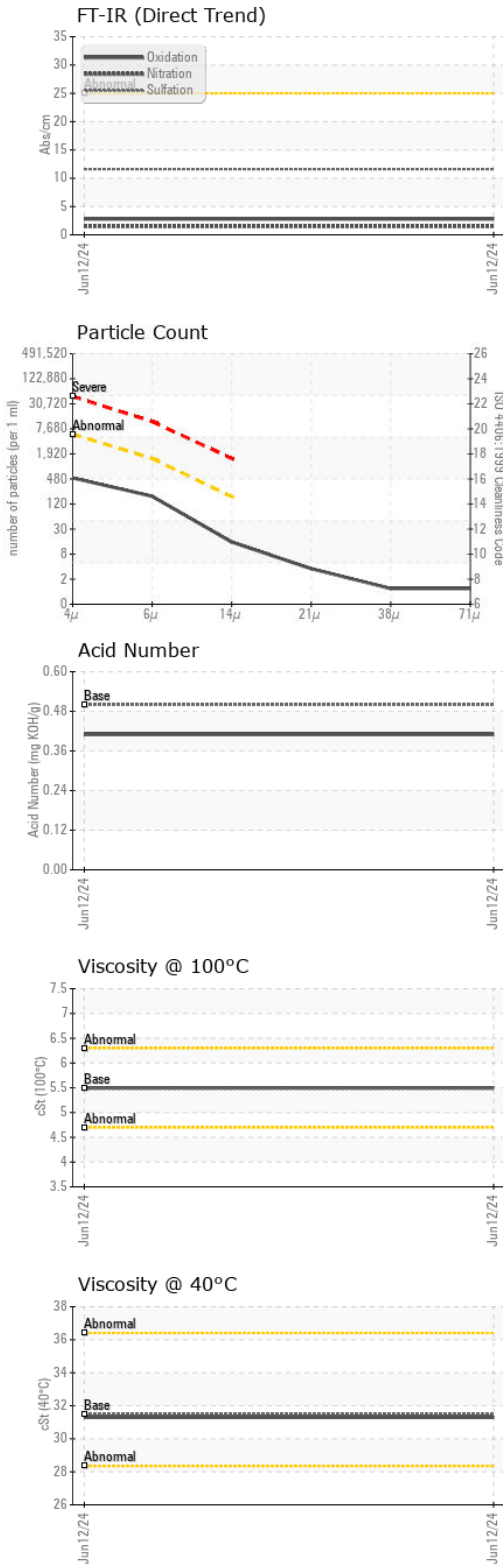

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>447</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>163</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>13</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>3</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>16/15/11</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	<b>2.8</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.41</b>	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	<b>NONE</b>	---	---
Silt	scalar	Visual*	<b>NONE</b>	---	---
Debris	scalar	Visual*	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	<b>NONE</b>	---	---
Appearance	scalar	Visual*	<b>NORML</b>	---	---
Odor	scalar	Visual*	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	<b>NEG</b>	---	---
Free Water	scalar	Visual*	<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	<b>31.5</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	<b>5.48</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	<b>110</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0079804  
**Lab Number** : **02641770**  
**Unique Number** : 5799309  
**Test Package** : MOB 2 ( Additional Tests: FT-IR, ICP-NewOil, KV100, PrcCount, VI )

**Received** : 13 Jun 2024  
**Tested** : 14 Jun 2024  
**Diagnosed** : 14 Jun 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Petro Lub**  
 10390 Louis H. Lafontaine  
 Anjou, QC  
 CA H1J 2T3  
 Contact: Shayne Eteson  
 sheteson@petrolub.ca  
 T: (514)920-0326  
 F: (514)920-0853