




# OIL ANALYSIS REPORT

Sample Rating Trend

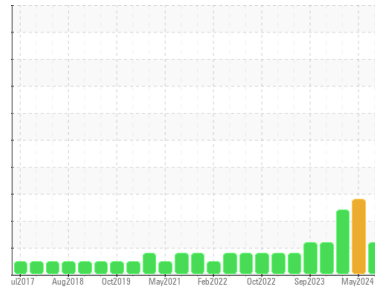

FUEL



Machine Id

**8422**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (20 LTR)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0123454</b>	GFL0116854	GFL0110713
Sample Date	Client Info	<b>12 Jun 2024</b>	30 May 2024	29 Feb 2024
Machine Age	hrs	<b>535</b>	535	535
Oil Age	hrs	<b>535</b>	535	535
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	SEVERE	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>100	<b>6</b>	29	11
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	0	<b>3</b>	3	1
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>52</b>	45	50
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>844</b>	730	820
Calcium	ppm	ASTM D5185(m)	1070	<b>941</b>	807	890
Phosphorus	ppm	ASTM D5185(m)	1150	<b>898</b>	743	874
Zinc	ppm	ASTM D5185(m)	1270	<b>1072</b>	899	1019
Sulfur	ppm	ASTM D5185(m)	2060	<b>2363</b>	1780	2266
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS




method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	4	4
Sodium	ppm	ASTM D5185(m)		<b>1</b>	2	1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1
Fuel	%	ASTM D7593*	>5	<b>▲ 7.1</b>	▲ 17.5	▲ 10.1

## INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	ASTM D7844*	>3	<b>0.1</b>	0.5	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.1</b>	14.7	10.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.6</b>	25.4	21.3











# OIL ANALYSIS REPORT

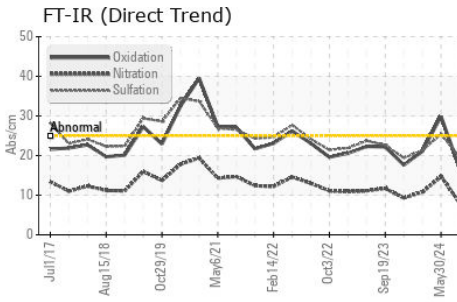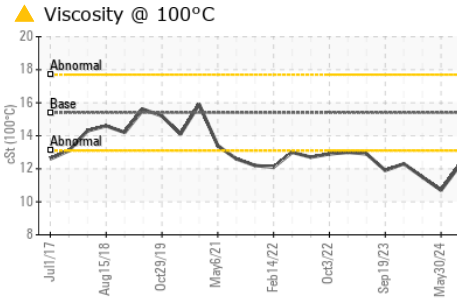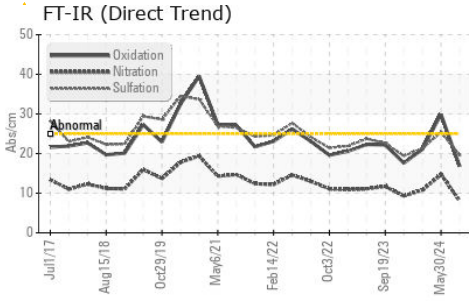

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>16.8</b>	29.9	21.1
VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>▲ 12.2</b>	▲ 10.7	▲ 11.5

## GRAPHS

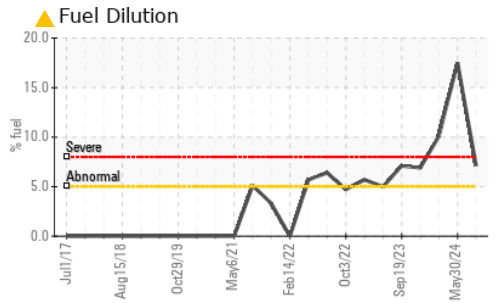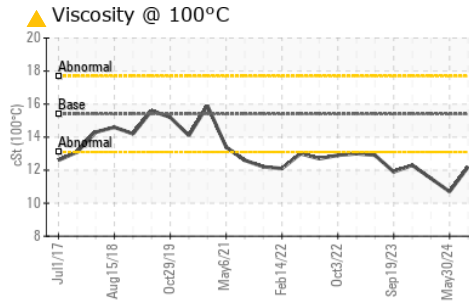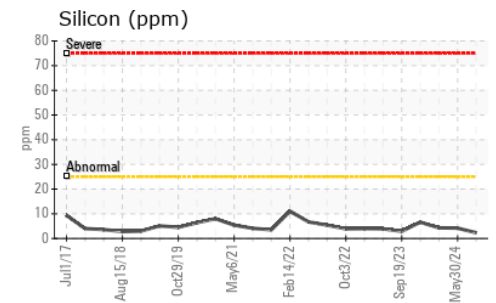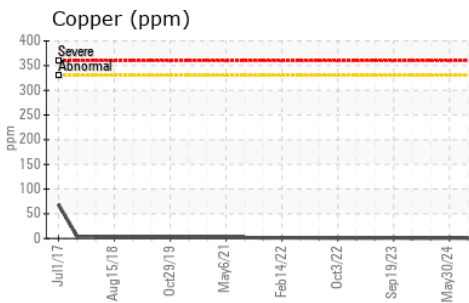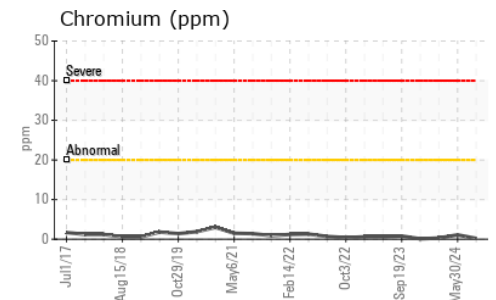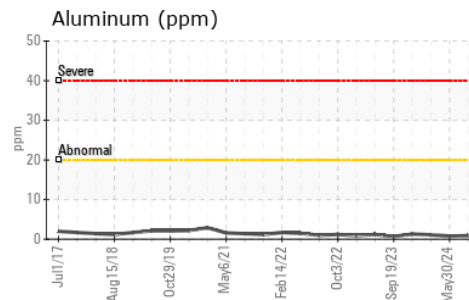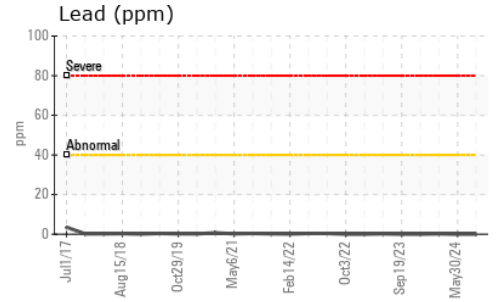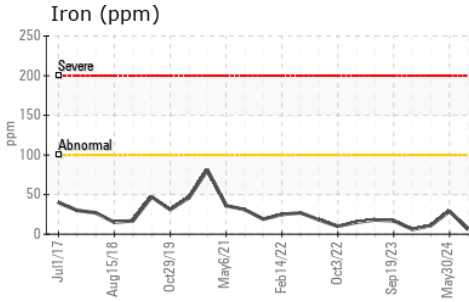

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0123454  
**Lab Number** : **02642270**  
**Unique Number** : 5799809  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )

**GFL Environmental - 221 - Windsor**  
 905 Tecumseh Road W  
 Windsor, ON  
 CA N8W 4J5  
 Contact: Pamela-Jean Butler  
 pamelajeau.butler@gflenv.com  
 T: (519)948-8126  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.