




OIL ANALYSIS REPORT

Sample Rating Trend

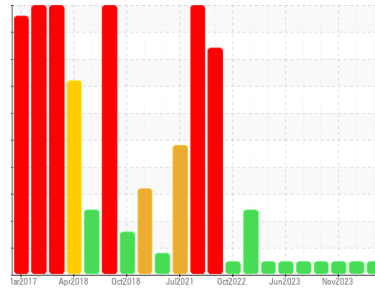

NORMAL



Machine Id

4587

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0118976	GFL0102605	GFL0097634
Sample Date	Client Info		18 Jun 2024	13 Feb 2024	16 Nov 2023
Machine Age	hrs	Client Info	0	0	2717
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >110	42	49	53
Chromium	ppm	ASTM D5185(m) >4	2	2	2
Nickel	ppm	ASTM D5185(m) >2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m) >2	<1	0	<1
Aluminum	ppm	ASTM D5185(m) >25	3	4	3
Lead	ppm	ASTM D5185(m) >45	3	5	11
Copper	ppm	ASTM D5185(m) >85	2	3	4
Tin	ppm	ASTM D5185(m) >4	<1	<1	1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	2	2	2
Barium	ppm	ASTM D5185(m) 0	0	0	<1
Molybdenum	ppm	ASTM D5185(m) 50	61	61	62
Manganese	ppm	ASTM D5185(m) 0	<1	0	<1
Magnesium	ppm	ASTM D5185(m) 950	952	994	1001
Calcium	ppm	ASTM D5185(m) 1050	1063	1113	1103
Phosphorus	ppm	ASTM D5185(m) 995	1002	1027	1015
Zinc	ppm	ASTM D5185(m) 1180	1202	1225	1246
Sulfur	ppm	ASTM D5185(m) 2600	2360	2554	2401
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >30	6	5	7
Sodium	ppm	ASTM D5185(m)	7	7	8
Potassium	ppm	ASTM D5185(m) >20	1	1	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	1	1	1.1
Nitration	Abs/cm	ASTM D7624* >20	11.3	11.8	12.1
Sulfation	Abs/.1mm	ASTM D7415* >30	24.0	23.8	25.0



OIL ANALYSIS REPORT

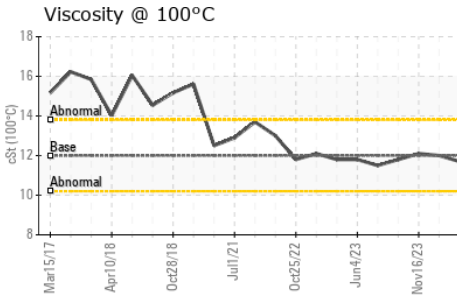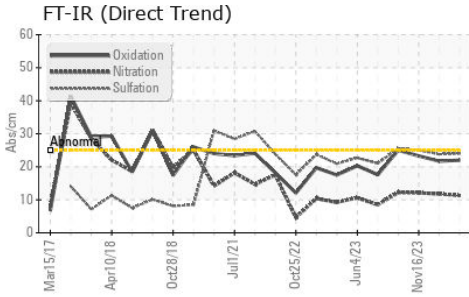

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	22.0	21.7	23.3









VISUAL

method	limit/base	current	history1	history2	
Emulsified Water	scalar Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 100°C	cSt ASTM D7279(m)	12.00	11.7	12.0	12.1

GRAPHS

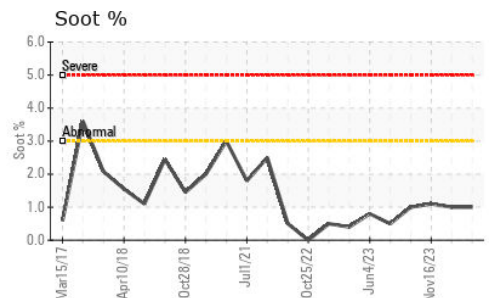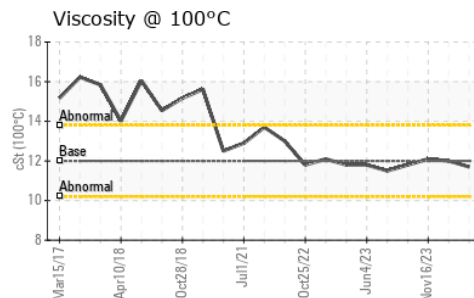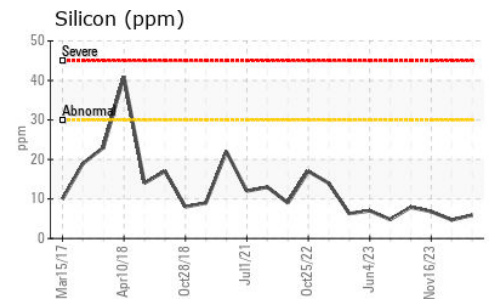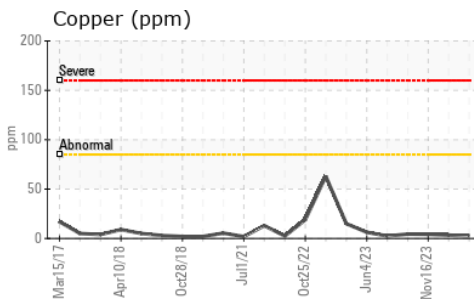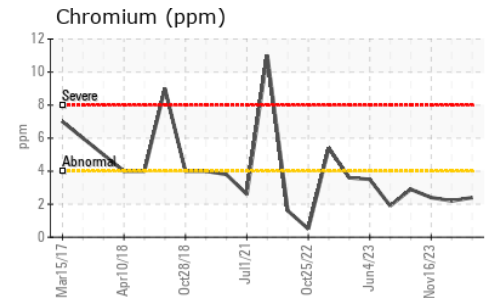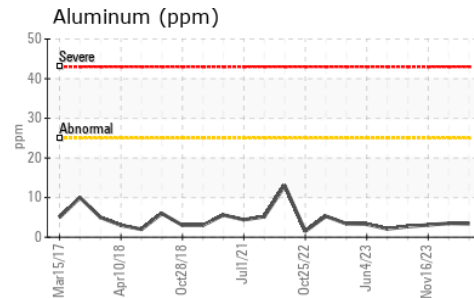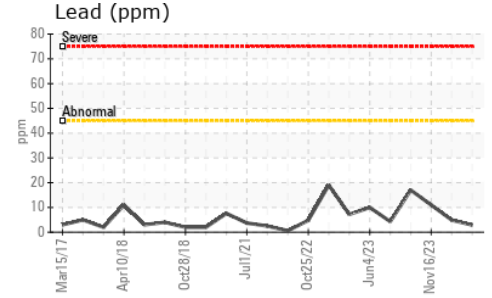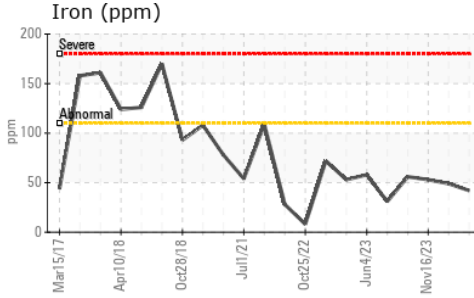

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118976
Lab Number : 02642754
Unique Number : 5800293
Test Package : MOB 1
Received : 19 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.