


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

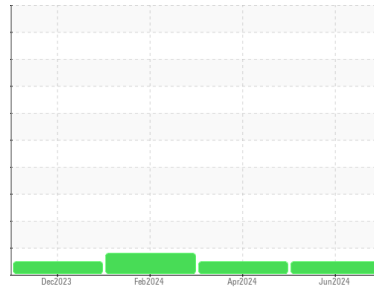

Machine Id  
**FORD 515590**

Component  
**Gasoline Engine**

Fluid  
**PETRO CANADA SUPREME 5W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0085521</b>	PC0085530	PC0085546
Sample Date	Client Info			<b>04 Jun 2024</b>	17 Apr 2024	25 Feb 2024
Machine Age	kms	Client Info		<b>15228</b>	11076	7079
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	MARGINAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	▲ 2.8
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG






WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>150	<b>11</b>	8	7
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>40	<b>5</b>	4	4
Lead	ppm	ASTM D5185(m)	>50	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>155	<b>8</b>	7	7
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	186	<b>32</b>	44	89
Barium	ppm	ASTM D5185(m)	<1	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	79	<b>75</b>	75	77
Manganese	ppm	ASTM D5185(m)	0	<b>1</b>	1	<1
Magnesium	ppm	ASTM D5185(m)	578	<b>488</b>	499	516
Calcium	ppm	ASTM D5185(m)	1002	<b>1199</b>	1197	1250
Phosphorus	ppm	ASTM D5185(m)	745	<b>639</b>	620	673
Zinc	ppm	ASTM D5185(m)	837	<b>722</b>	723	746
Sulfur	ppm	ASTM D5185(m)	2502	<b>2157</b>	2148	2448
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	<b>37</b>	36	37
Sodium	ppm	ASTM D5185(m)	>400	<b>5</b>	4	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.8</b>	10.7	8.1
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>26.1</b>	22.7	19.1

# OIL ANALYSIS REPORT





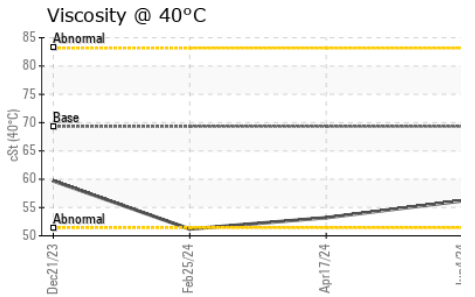
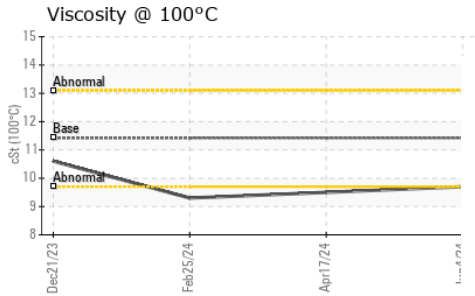
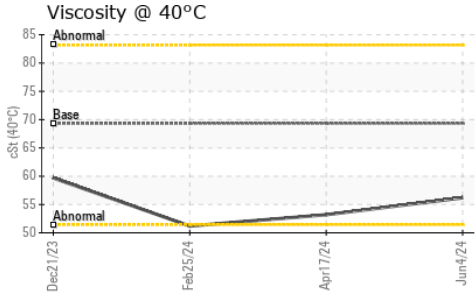
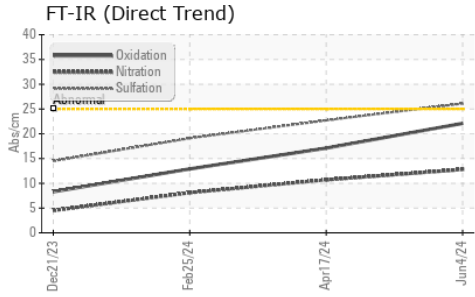


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>22.1</b>	17.1	12.9
Base Number (BN)	mg KOH/g	ASTM D2896*	7.0	<b>4.42</b>	5.54	6.41

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>LIGHT</b>	NONE	VLITE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	69.33	<b>56.2</b>	53.2	51.2
Visc @ 100°C	cSt	ASTM D7279(m)	11.42	<b>9.7</b>	9.5	9.3
Viscosity Index (VI)	Scale	ASTM D2270*	159	<b>158</b>	164	166

## GRAPHS

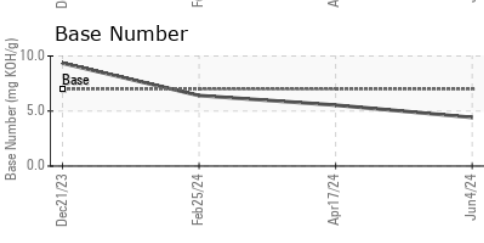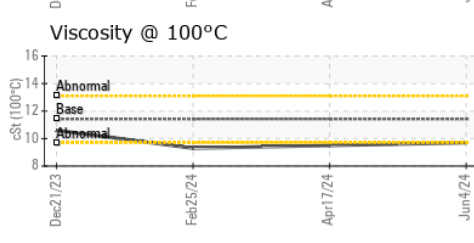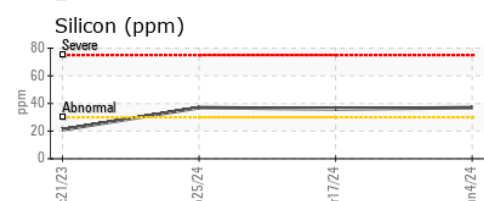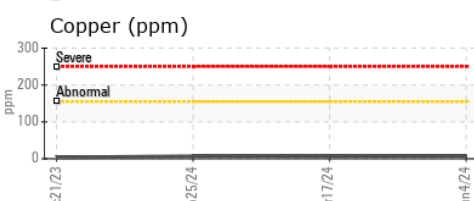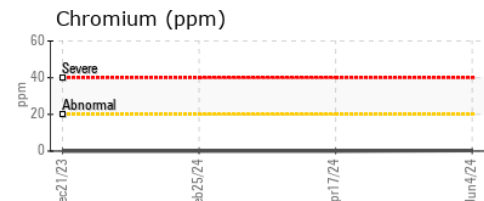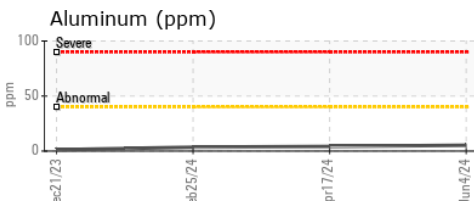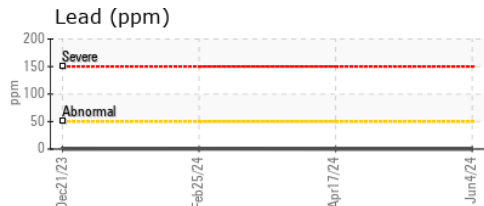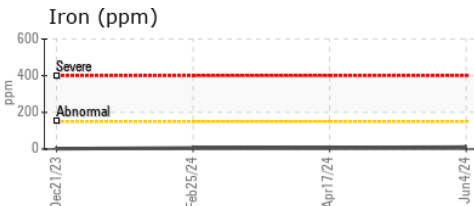

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0085521 **Received** : 19 Jun 2024  
**Lab Number** : **02642844** **Tested** : 20 Jun 2024  
**Unique Number** : 5800383 **Diagnosed** : 20 Jun 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV40, VI )

**UPS CANADA**  
 2900 STEELES AVE W  
 CONCORD, ON  
 CA L4K 3S2  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.