




OIL ANALYSIS REPORT

Sample Rating Trend

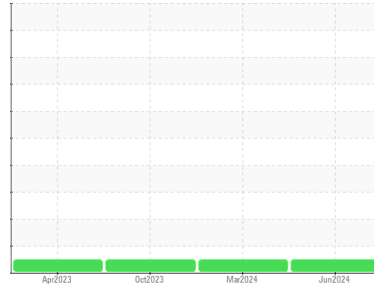

NORMAL



Area
[1297878]

Machine Id
528055

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0124680	GFL0110665	GFL0094508
Sample Date	Client Info			19 Jun 2024	19 Mar 2024	10 Oct 2023
Machine Age	hrs	Client Info		10304	9809	9238
Oil Age	hrs	Client Info		600	0	9238
Oil Changed	Client Info			Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	13	18	9
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	3	5	2
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	4	6	4
Tin	ppm	ASTM D5185(m)	>15	<1	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	2	<1	6
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	59	58	55
Manganese	ppm	ASTM D5185(m)	0	<1	0	0
Magnesium	ppm	ASTM D5185(m)	1010	939	960	801
Calcium	ppm	ASTM D5185(m)	1070	1045	1123	1211
Phosphorus	ppm	ASTM D5185(m)	1150	955	985	972
Zinc	ppm	ASTM D5185(m)	1270	1191	1203	1160
Sulfur	ppm	ASTM D5185(m)	2060	2496	2459	2583
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	2	2	3
Sodium	ppm	ASTM D5185(m)		1	1	2
Potassium	ppm	ASTM D5185(m)	>20	1	2	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.1	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	6.9	7.0	6.5
Sulfation	Abs./1mm	ASTM D7415*	>30	18.9	18.5	18.4



OIL ANALYSIS REPORT

FT-IR (Direct Trend)

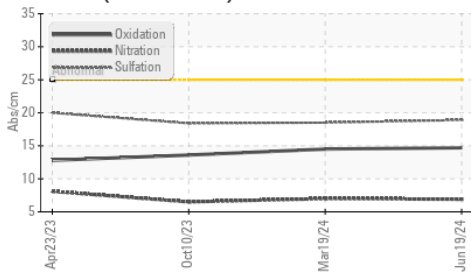

FLUID DEGRADATION

Method	Limit/Base	Current	History 1	History 2	
Oxidation	Abs./1mm ASTM D7414*	>25	14.7	14.5	13.6

VISUAL


Method	Limit/Base	Current	History 1	History 2	
Emulsified Water	scalar Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar Visual*		NEG	NEG	NEG

FLUID PROPERTIES


Method	Limit/Base	Current	History 1	History 2	
Visc @ 100°C	cSt ASTM D7279(m)	15.4	14.3	13.8	14.0

GRAPHS


Viscosity @ 100°C

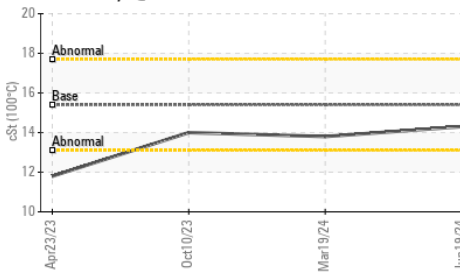


Iron (ppm)

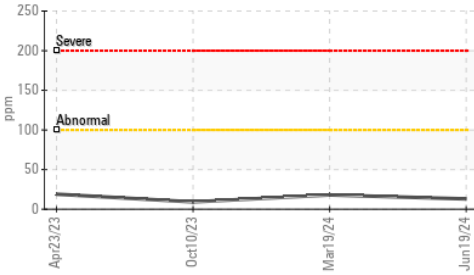


Lead (ppm)

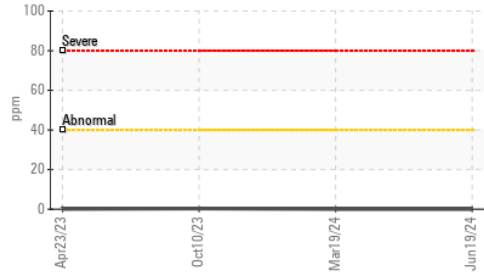


Aluminum (ppm)

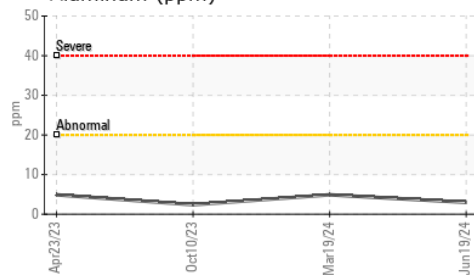


Chromium (ppm)

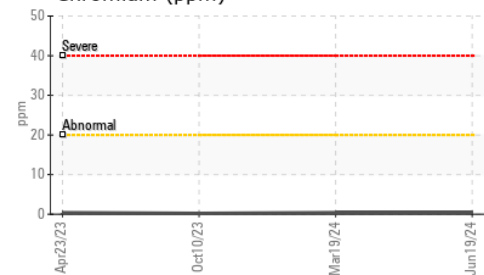


Copper (ppm)

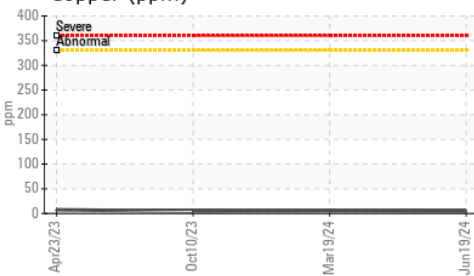


Silicon (ppm)

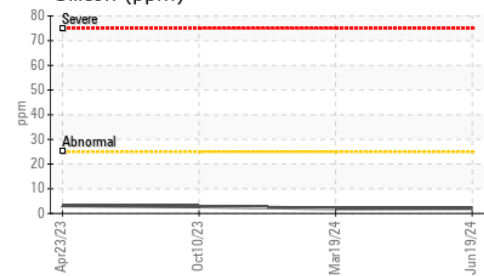

Viscosity @ 100°C

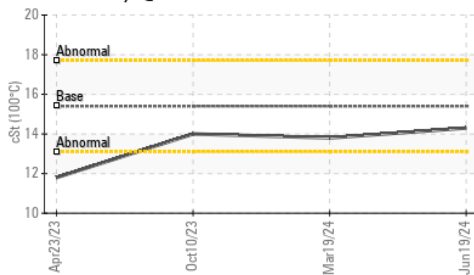

Soot %

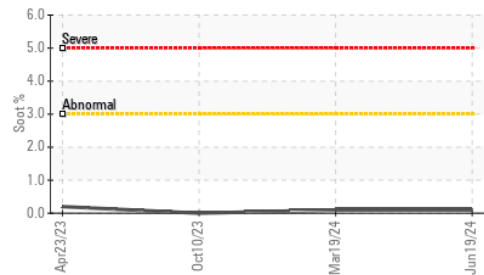

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0124680
Lab Number : 02643337
Unique Number : 5800876
Test Package : MOB 1

GFL Environmental - 207 - Pickering SW
 1034 TOY AVENUE, PICKERING YARD
 PICKERING, ON
 CA L1W 3P1
 Contact: Ian Patton
 ipatton@gflenv.com
 T: (905)831-6297
 F: (905)426-3577

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.