




OIL ANALYSIS REPORT

Sample Rating Trend

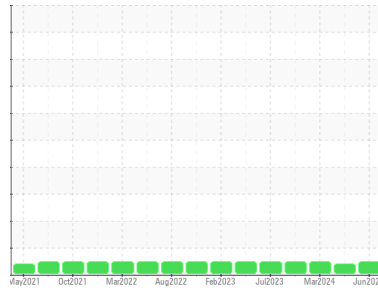

NORMAL



Machine Id
411002
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0111997	GFL0111986	GFL0090402
Sample Date	Client Info		19 Jun 2024	04 Jun 2024	26 Mar 2024
Machine Age	hrs	Client Info	7900	536	132620
Oil Age	hrs	Client Info	1086	0	0
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	0.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	5	29	7
Chromium	ppm	ASTM D5185(m) >20	<1	<1	0
Nickel	ppm	ASTM D5185(m) >5	<1	3	0
Titanium	ppm	ASTM D5185(m) >2	0	0	0
Silver	ppm	ASTM D5185(m) >2	<1	0	0
Aluminum	ppm	ASTM D5185(m) >20	1	7	2
Lead	ppm	ASTM D5185(m) >40	0	5	0
Copper	ppm	ASTM D5185(m) >330	1	227	5
Tin	ppm	ASTM D5185(m) >15	0	3	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	2	276	3
Barium	ppm	ASTM D5185(m) 0	0	<1	0
Molybdenum	ppm	ASTM D5185(m) 60	58	129	58
Manganese	ppm	ASTM D5185(m) 0	<1	4	0
Magnesium	ppm	ASTM D5185(m) 1010	939	690	981
Calcium	ppm	ASTM D5185(m) 1070	1038	1432	1050
Phosphorus	ppm	ASTM D5185(m) 1150	973	636	974
Zinc	ppm	ASTM D5185(m) 1270	1186	760	1177
Sulfur	ppm	ASTM D5185(m) 2060	2446	1849	2456
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	2	54	1
Sodium	ppm	ASTM D5185(m)	3	3	5
Potassium	ppm	ASTM D5185(m) >20	1	12	2

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0.1	0.1	0.1
Nitration	Abs/cm	ASTM D7624* >20	7.2	9.3	7.2
Sulfation	Abs.1mm	ASTM D7415* >30	19.3	25.5	18.9



OIL ANALYSIS REPORT






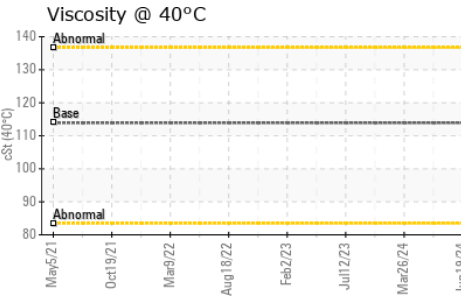
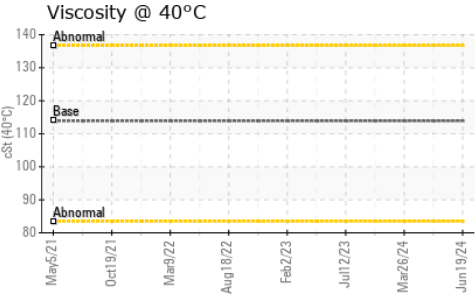
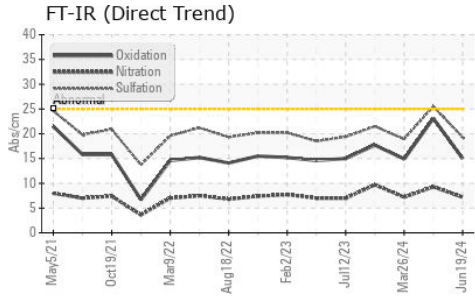


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.0	23.1	14.9

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	113.9	99.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.7	▲ 9.3	13.7
Viscosity Index (VI)	Scale	ASTM D2270*	142	138	---	---

GRAPHS

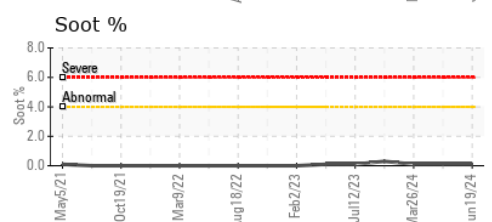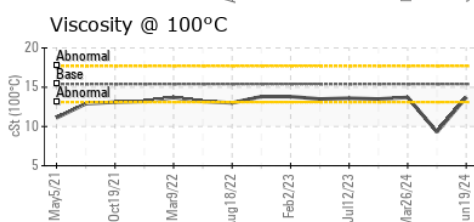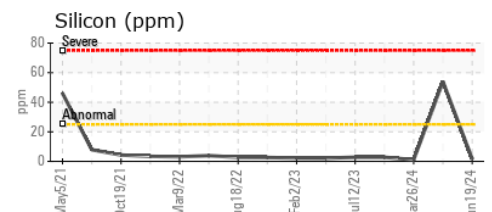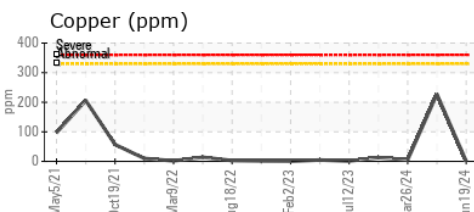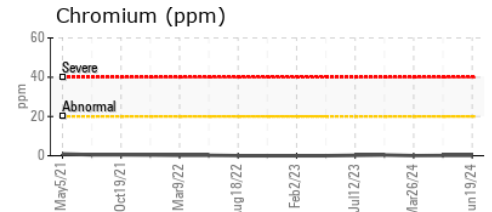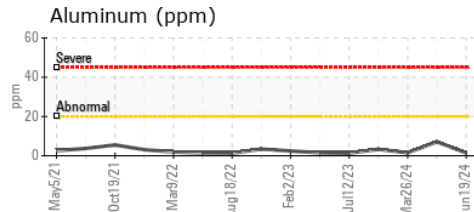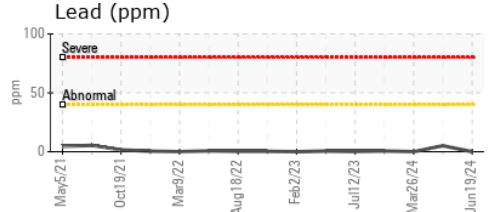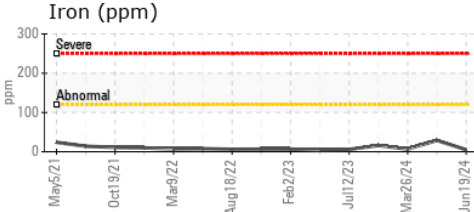

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0111997 **Received** : 24 Jun 2024
Lab Number : **02643622** **Tested** : 24 Jun 2024
Unique Number : 5801161 **Diagnosed** : 24 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

GFL Environmental - 216M
 2475 Beryl Drive
 Oakville, ON
 CA L6J 7X4
 Contact: Matthew Gunness
 mgunness@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.