


# GREASE ANALYSIS

Sample Rating Trend



**NORMAL**

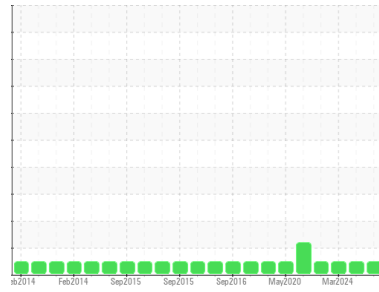

Area  
**TURRET UPPER BEARING [450356201]**  
Machine Id  
**NC-05603 TORQUE TUBE BEARING**  
Component  
**Grease**  
Fluid  
**PETRO CANADA GREASE OG-1 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Grease Condition

The condition of the grease is acceptable for the time in service.

### Contaminants

There is no indication of any contamination in the grease.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0080684</b>	PC0080739	PC0080740
Sample Date	Client Info			<b>15 Jun 2024</b>	15 Mar 2024	15 Mar 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Grease Age	hrs	Client Info		<b>0</b>	0	0
Grease Serviced	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>200	<b>0</b>	0	0
Iron	ppm	ASTM D5185(m)	>250	<b>4</b>	3	3
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>75	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>165</b>	136	134
Magnesium	ppm	ASTM D5185(m)		<b>6</b>	7	7
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185(m)		<b>&lt;1</b>	2	<1
Zinc	ppm	ASTM D5185(m)		<b>50</b>	97	94
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0

THICKENER/SOAP		method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185(m)		<b>2</b>	1	1
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>4264</b>	3805	3671
Sodium	ppm	ASTM D5185(m)		<b>8</b>	8	9
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Sulfur	ppm	ASTM D5185(m)		<b>752</b>	611	599

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>150	<b>3</b>	2	1
Potassium	ppm	ASTM D5185(m)		<b>3</b>	4	3




GREASE CONDITION		method	limit/base	current	history1	history2
Grease Color	Visual*	Tan		<b>Tan</b>	Cream	Cream
Texture	In-house*	Buttery		<b>Buttery</b>	Buttery	Buttery
NLGI Consistency	NLGI Scale	SKF Method*	1	<b>2</b>	2	1-2

# GREASE ANALYSIS

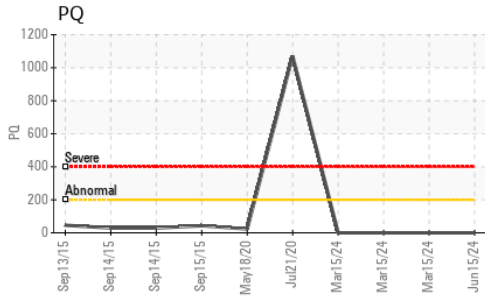

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter					

## GRAPHS

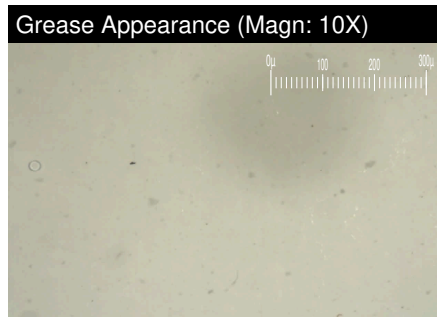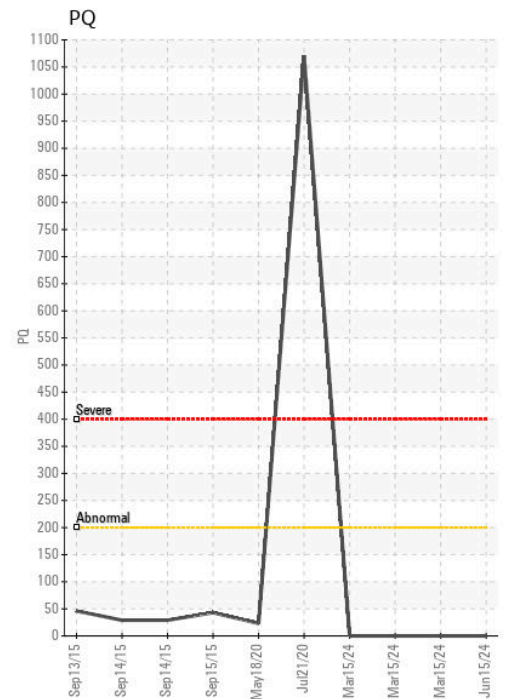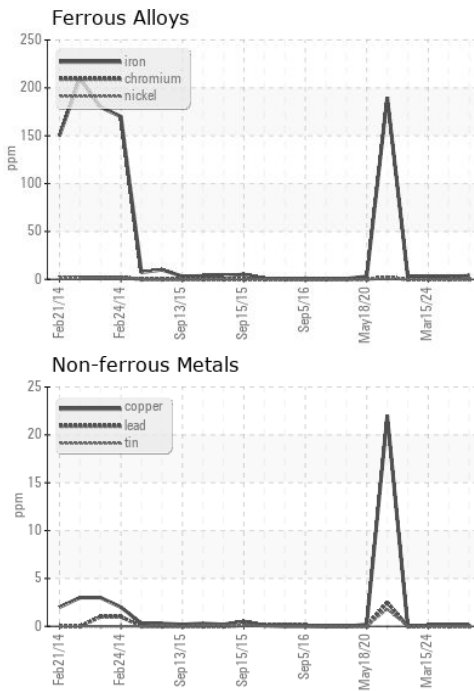

**CALA**  
ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0080684  
**Lab Number** : 02643859  
**Unique Number** : 5801398  
**Test Package** : GRS 1 ( Additional Tests: BottomAnalysis )  
**Received** : 24 Jun 2024  
**Tested** : 26 Jun 2024  
**Diagnosed** : 26 Jun 2024 - Bill Quesnel

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Strret  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshhynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.