




OIL ANALYSIS REPORT

Sample Rating Trend

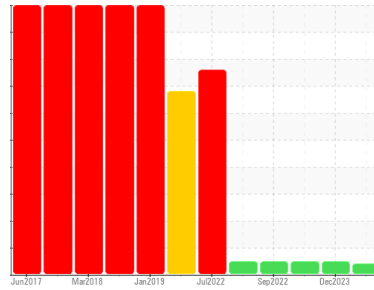

VISCOSITY



Machine Id
9259
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0119028	GFL0101683	GFL0090633
Sample Date	Client Info	20 Jun 2024	27 Dec 2023	09 Aug 2023
Machine Age	hrs	20075	19093	18087
Oil Age	hrs	0	0	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >50	21	28	30
Chromium	ppm ASTM D5185(m) >5	1	3	2
Nickel	ppm ASTM D5185(m) >4	<1	2	1
Titanium	ppm ASTM D5185(m) >5	0	0	<1
Silver	ppm ASTM D5185(m) >3	<1	0	0
Aluminum	ppm ASTM D5185(m) >25	3	11	4
Lead	ppm ASTM D5185(m) >40	0	1	<1
Copper	ppm ASTM D5185(m) >150	1	2	4
Tin	ppm ASTM D5185(m) >4	<1	<1	<1
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 50	4	5	7
Barium	ppm ASTM D5185(m) 5	1	0	2
Molybdenum	ppm ASTM D5185(m) 50	62	62	54
Manganese	ppm ASTM D5185(m) 0	<1	1	5
Magnesium	ppm ASTM D5185(m) 560	947	667	523
Calcium	ppm ASTM D5185(m) 1510	1162	1864	1605
Phosphorus	ppm ASTM D5185(m) 780	956	853	678
Zinc	ppm ASTM D5185(m) 870	1175	1066	898
Sulfur	ppm ASTM D5185(m) 2040	2364	2277	1957
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	12	6	17
Sodium	ppm ASTM D5185(m)	5	10	4
Potassium	ppm ASTM D5185(m) >20	2	2	2

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% ASTM D7844*	0	0	0
Nitration	Abs/cm ASTM D7624*	9.0	12.9	10.5
Sulfation	Abs/.1mm ASTM D7415*	19.6	28.3	22.6

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414*	15.3	24.5	17.7











OIL ANALYSIS REPORT

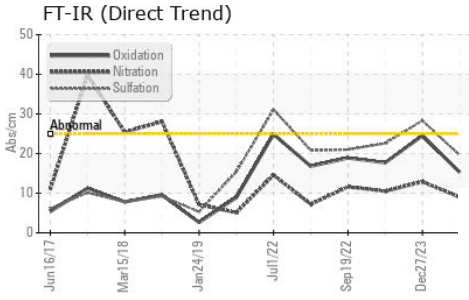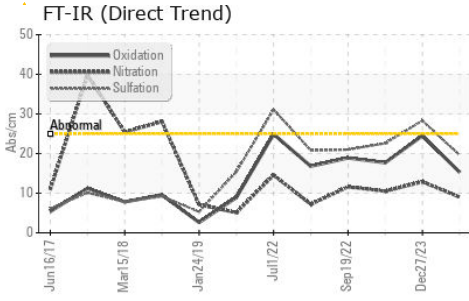

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.1 ▲ 11.8	15.3	15.0

GRAPHS

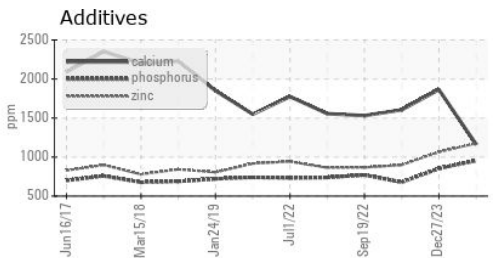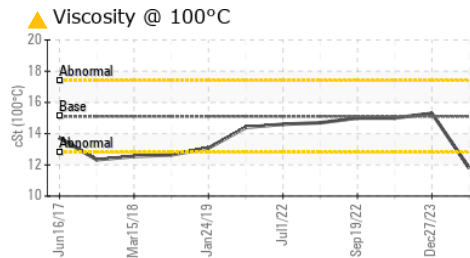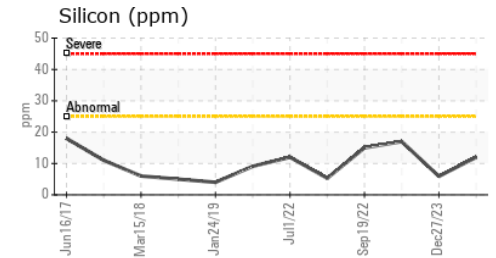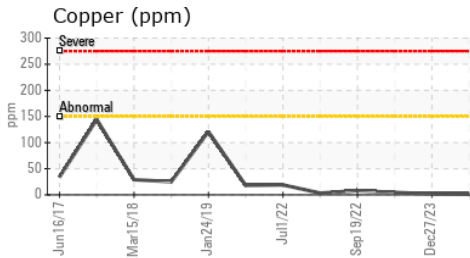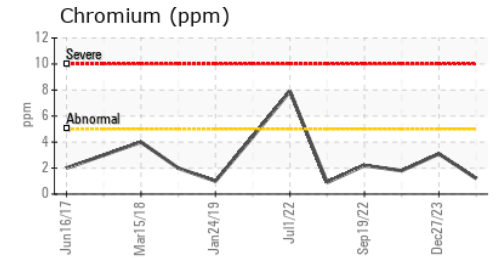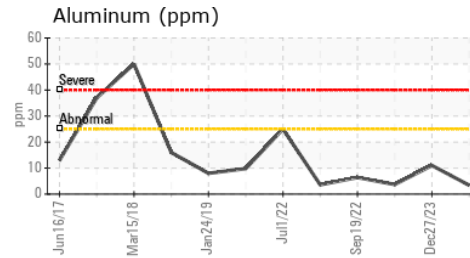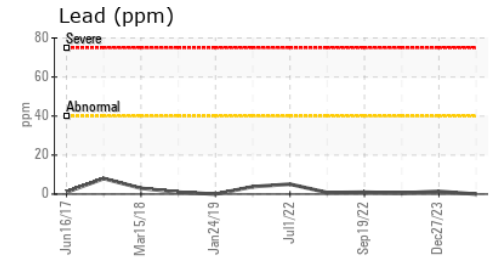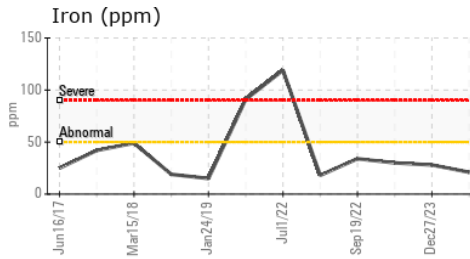

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0119028
Lab Number : 02643981
Unique Number : 5801520
Test Package : MOB 1 (Additional Tests: Visual)
Received : 25 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Kevin Marson

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.