




OIL ANALYSIS REPORT

Sample Rating Trend

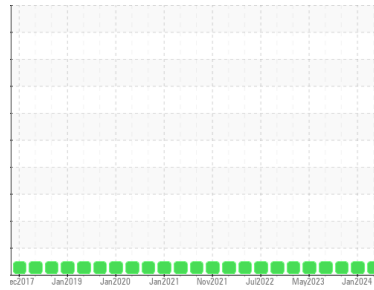

NORMAL



Machine Id

701038

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (20 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0123474 | GFL0097444 | GFL0085660 |
| Sample Date | Client Info | | 25 Jun 2024 | 09 Jan 2024 | 08 Nov 2023 |
| Machine Age | hrs | Client Info | 757 | 757 | 757 |
| Oil Age | hrs | Client Info | 757 | 757 | 757 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|--------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) >100 | 15 | 12 | 20 |
| Chromium | ppm | ASTM D5185(m) >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185(m) >4 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) >3 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185(m) >20 | 1 | 2 | 2 |
| Lead | ppm | ASTM D5185(m) >40 | 0 | <1 | 0 |
| Copper | ppm | ASTM D5185(m) >330 | 1 | <1 | 1 |
| Tin | ppm | ASTM D5185(m) >15 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 0 | 2 | 2 | 2 |
| Barium | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) 60 | 57 | 56 | 58 |
| Manganese | ppm | ASTM D5185(m) 0 | <1 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) 1010 | 934 | 914 | 929 |
| Calcium | ppm | ASTM D5185(m) 1070 | 1013 | 1015 | 1010 |
| Phosphorus | ppm | ASTM D5185(m) 1150 | 949 | 974 | 968 |
| Zinc | ppm | ASTM D5185(m) 1270 | 1163 | 1134 | 1151 |
| Sulfur | ppm | ASTM D5185(m) 2060 | 2304 | 2478 | 2248 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS



| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >25 | 3 | 4 | 6 |
| Sodium | ppm | ASTM D5185(m) | 2 | 1 | 2 |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | 5 | 2 |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* >3 | 0.4 | 0.3 | 0.5 |
| Nitration | Abs/cm | ASTM D7624* >20 | 10.6 | 9.7 | 10.5 |
| Sulfation | Abs/.1mm | ASTM D7415* >30 | 22.1 | 20.9 | 22.9 |



OIL ANALYSIS REPORT







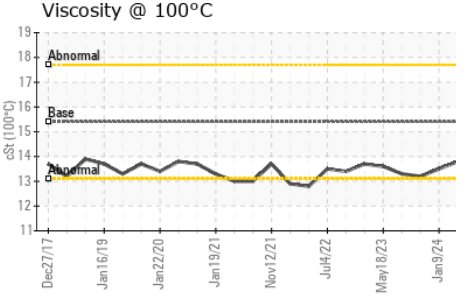
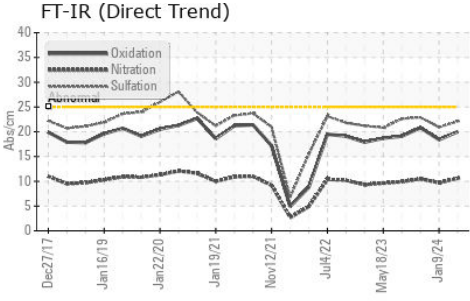


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 20.0 | 18.4 | 20.8 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|------------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.4 | 13.8 | 13.5 | 13.2 |

GRAPHS

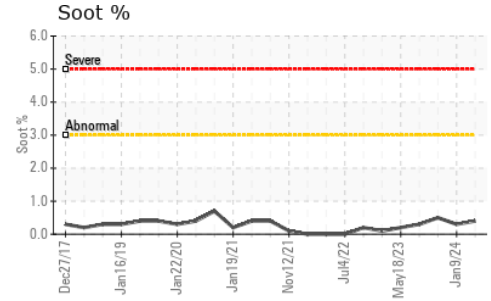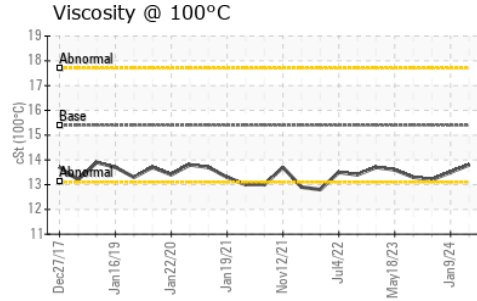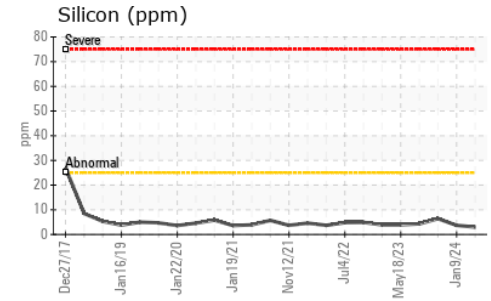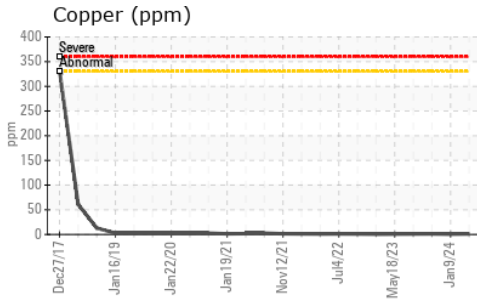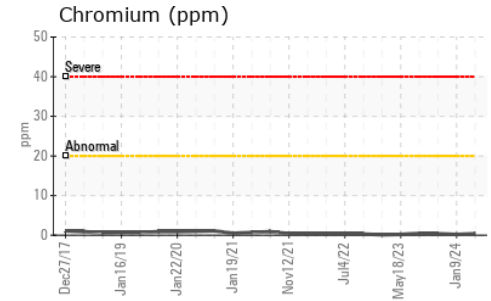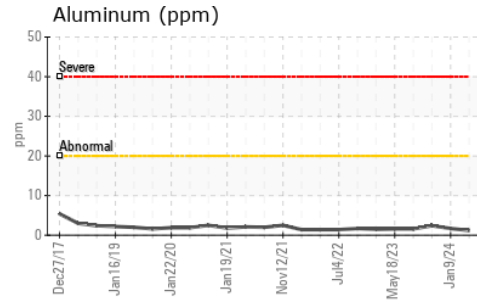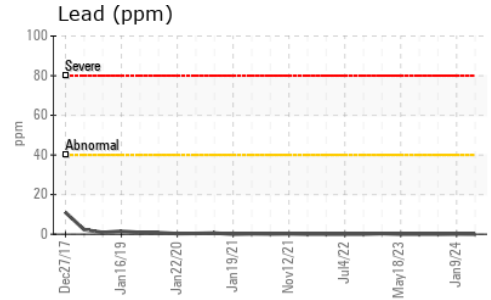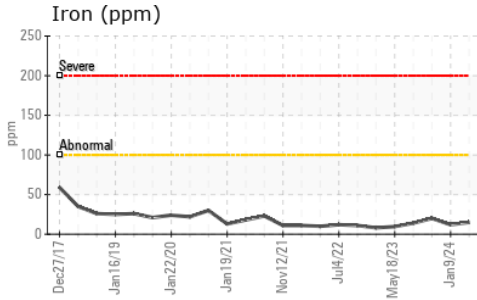

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0123474
Lab Number : 02644290
Unique Number : 5801829
Test Package : MOB 1

GFL Environmental - 221 - Windsor
 905 Tecumseh Road W
 Windsor, ON
 CA N8W 4J5
 Contact: Pamela-Jean Butler
 pamela.jean.butler@gflenv.com
 T: (519)948-8126
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.