




OIL ANALYSIS REPORT



Machine Id
401205
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (36 LTR)

Sample Rating Trend

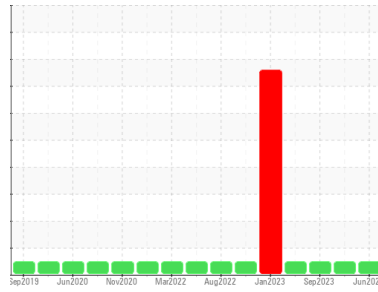

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0126250	GFL0097543	GFL0088958
Sample Date	Client Info		28 Jun 2024	14 Oct 2023	08 Sep 2023
Machine Age	hrs	Client Info	20555	18893	18702
Oil Age	hrs	Client Info	1114	18702	586
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	9	3	6
Chromium	ppm	ASTM D5185(m) >20	0	0	0
Nickel	ppm	ASTM D5185(m) >15	<1	0	0
Titanium	ppm	ASTM D5185(m) >2	0	0	0
Silver	ppm	ASTM D5185(m) >3	0	<1	0
Aluminum	ppm	ASTM D5185(m) >20	1	<1	1
Lead	ppm	ASTM D5185(m) >40	1	<1	2
Copper	ppm	ASTM D5185(m) >330	<1	<1	<1
Tin	ppm	ASTM D5185(m) >15	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	3	7	4
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	60	58	59
Manganese	ppm	ASTM D5185(m) 0	<1	0	<1
Magnesium	ppm	ASTM D5185(m) 1010	973	944	970
Calcium	ppm	ASTM D5185(m) 1070	1055	1057	1053
Phosphorus	ppm	ASTM D5185(m) 1150	991	986	1050
Zinc	ppm	ASTM D5185(m) 1270	1210	1167	1191
Sulfur	ppm	ASTM D5185(m) 2060	2380	2525	2453
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	2	3	3
Sodium	ppm	ASTM D5185(m)	4	3	4
Potassium	ppm	ASTM D5185(m) >20	<1	0	<1


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0.4	0	0.2
Nitration	Abs/cm	ASTM D7624* >20	9.1	5.9	7.7
Sulfation	Abs./1mm	ASTM D7415* >30	21.0	18.3	19.7




OIL ANALYSIS REPORT

FT-IR (Direct Trend)

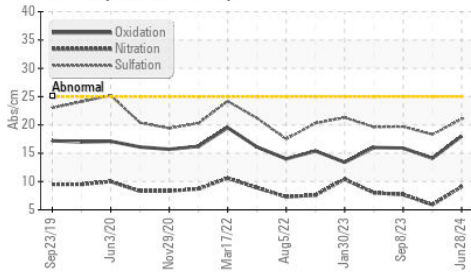

Viscosity @ 100°C

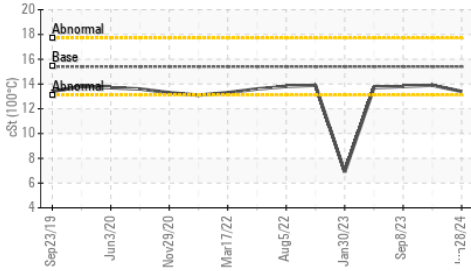

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	18.0	14.1	15.9

VISUAL


method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	---	---
Yellow Metal	scalar Visual*	NONE	---	---
Precipitate	scalar Visual*	NONE	---	---
Silt	scalar Visual*	NONE	---	---
Debris	scalar Visual*	NONE	---	---
Sand/Dirt	scalar Visual*	NONE	---	---
Appearance	scalar Visual*	NORML	---	---
Odor	scalar Visual*	NORML	NORML	NORML
Emulsified Water	scalar Visual*	>0.2	NEG	NEG
Free Water	scalar Visual*	NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2	
Visc @ 100°C	cSt ASTM D7279(m)	15.4	13.4	13.9	13.8

GRAPHS


Iron (ppm)

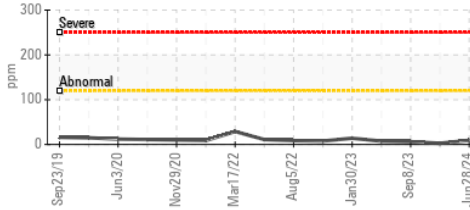


Lead (ppm)

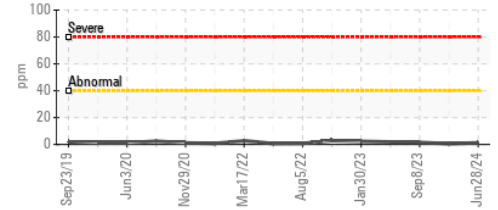


Aluminum (ppm)

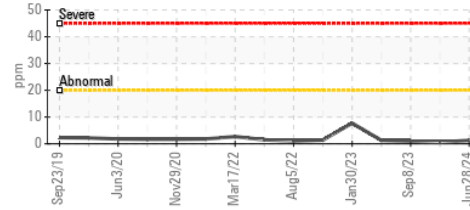


Chromium (ppm)

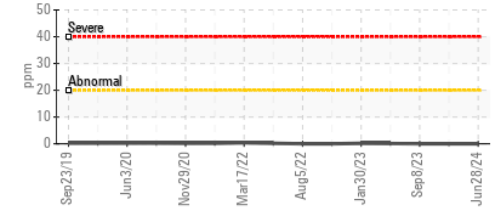


Copper (ppm)

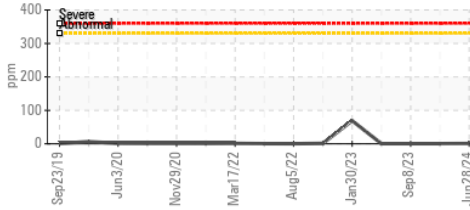


Silicon (ppm)

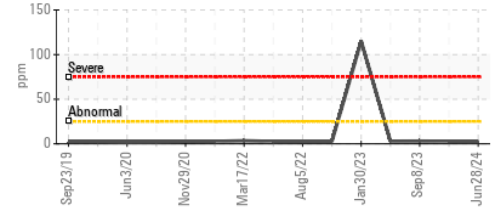

Viscosity @ 100°C

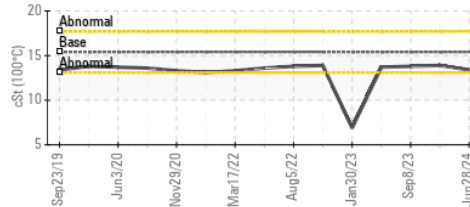

Soot %

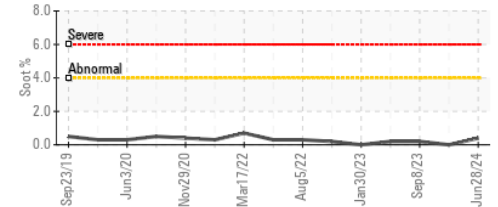

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0126250 **Received** : 02 Jul 2024
Lab Number : 02644784 **Tested** : 02 Jul 2024
Unique Number : 5802323 **Diagnosed** : 02 Jul 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Visual)

GFL Environmental - 216
 15 Bermondsey Road
 Toronto, ON
 CA M4B 1Y9
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.