




# OIL ANALYSIS REPORT

Sample Rating Trend

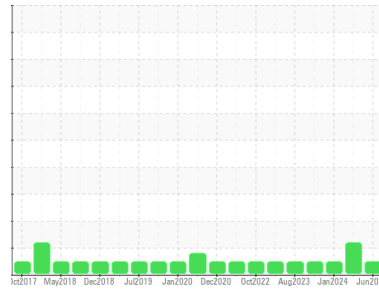

**NORMAL**



Machine Id

**801030**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (19 LTR)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122325</b>	GFL0117914	GFL0107150
Sample Date	Client Info		<b>27 Jun 2024</b>	04 Apr 2024	10 Jan 2024
Machine Age	kms	Client Info	<b>102796</b>	12582	102796
Oil Age	kms	Client Info	<b>0</b>	600	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	<b>47</b>	33	31
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	1	1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	2	3
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	<1	1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>43</b>	7	11
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>75</b>	61	62
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>784</b>	968	958
Calcium	ppm	ASTM D5185(m)	1070	<b>1259</b>	1061	1116
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1043</b>	972	1020
Zinc	ppm	ASTM D5185(m)	1270	<b>1289</b>	1192	1209
Sulfur	ppm	ASTM D5185(m)	2060	<b>2458</b>	2293	2481
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>14</b>	3	4
Sodium	ppm	ASTM D5185(m)		<b>10</b>	7	8
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Fuel	%	ASTM D7593*	>5	<b>1.5</b>	▲ 6.3	<1.0

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.8</b>	0.5	0.5
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.9</b>	12.3	12.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>26.3</b>	24.0	25.1



# OIL ANALYSIS REPORT






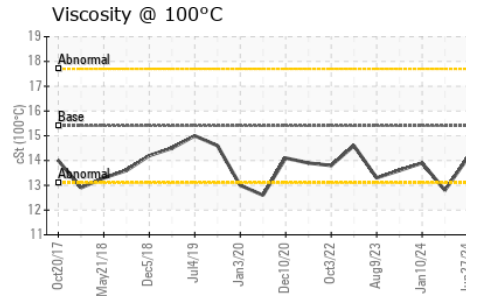
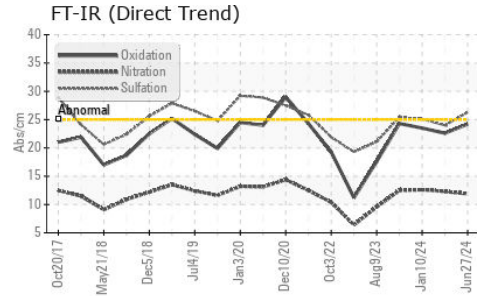
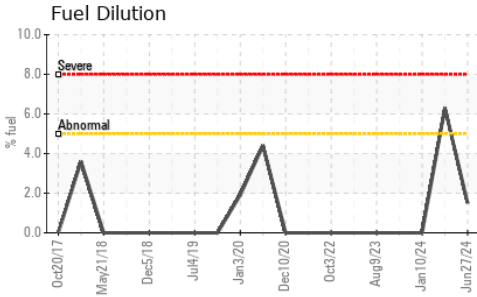


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>24.2</b>	22.6	23.5

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>14.1</b>	▲ 12.8	13.9

## GRAPHS

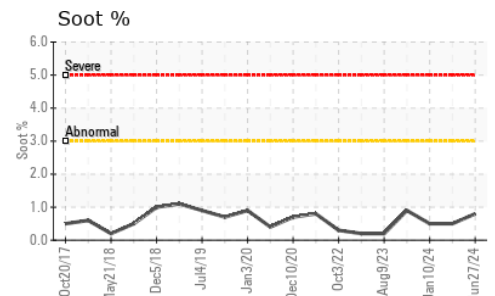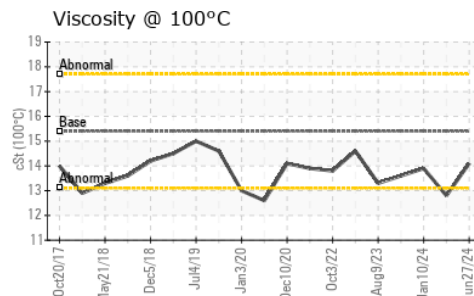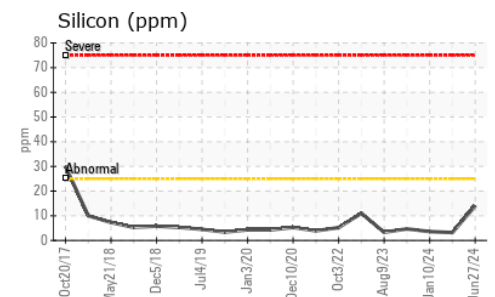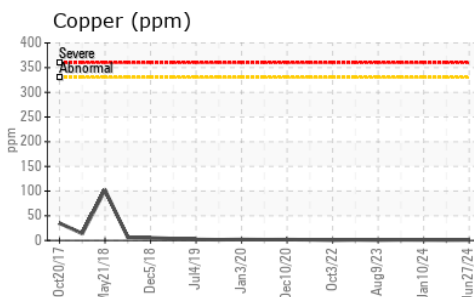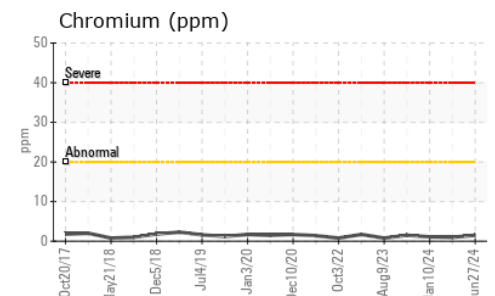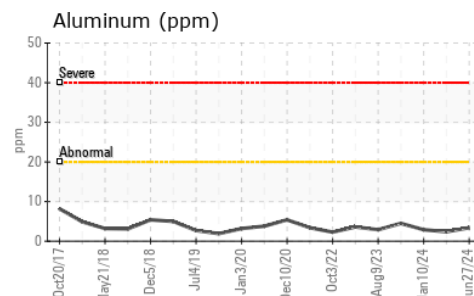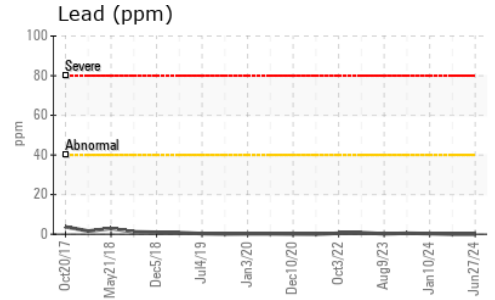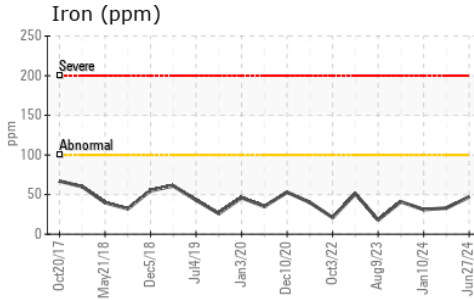

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0122325 **Received** : 03 Jul 2024  
**Lab Number** : **02645166** **Tested** : 04 Jul 2024  
**Unique Number** : 5802705 **Diagnosed** : 04 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )

**GFL Environmental - 217 - Aurora**  
 14131 BAYVIEW AVE, AURORA YARD  
 AURORA, ON  
 CA L4G 0K6  
 Contact: Mike Havens  
 MHavens@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: (905)713-2445