




OIL ANALYSIS REPORT

Sample Rating Trend

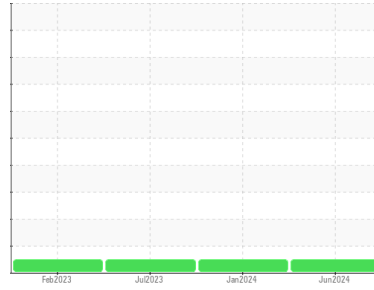

NORMAL



Machine Id

127063

Component

Diesel Engine

Fluid

PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0112437	GFL0099547	GFL0084294
Sample Date	Client Info		25 Jun 2024	04 Jan 2024	26 Jul 2023
Machine Age	kms	Client Info	275485	275000	274026
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	6	6	4
Chromium	ppm	ASTM D5185(m) >20	0	0	0
Nickel	ppm	ASTM D5185(m) >4	0	<1	0
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m) >3	<1	0	0
Aluminum	ppm	ASTM D5185(m) >20	<1	1	<1
Lead	ppm	ASTM D5185(m) >40	<1	<1	<1
Copper	ppm	ASTM D5185(m) >330	1	<1	<1
Tin	ppm	ASTM D5185(m) >15	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 1	4	3	5
Barium	ppm	ASTM D5185(m) 1	0	0	0
Molybdenum	ppm	ASTM D5185(m) 60	56	56	58
Manganese	ppm	ASTM D5185(m) 1	<1	0	<1
Magnesium	ppm	ASTM D5185(m) 1010	925	919	956
Calcium	ppm	ASTM D5185(m) 1070	1025	1029	1044
Phosphorus	ppm	ASTM D5185(m) 1150	993	1013	1053
Zinc	ppm	ASTM D5185(m) 1270	1166	1143	1157
Sulfur	ppm	ASTM D5185(m) 2060	2628	2706	2651
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	4	4	3
Sodium	ppm	ASTM D5185(m)	1	<1	1
Potassium	ppm	ASTM D5185(m) >20	0	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0	0	0
Nitration	Abs/cm	ASTM D7624* >20	6.6	6.5	5.7
Sulfation	Abs./1mm	ASTM D7415* >30	17.6	18.1	18.8

