



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**731104**  
 Component  
**Transmission (Auto)**  
 Fluid  
**DEXRON III (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0125476</b>	---	---
Sample Date	Client Info		<b>04 Jul 2024</b>	---	---
Machine Age	hrs	Client Info	<b>8240</b>	---	---
Oil Age	hrs	Client Info	<b>8240</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >160	<b>36</b>	---	---
Chromium	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >50	<b>18</b>	---	---
Lead	ppm	ASTM D5185(m) >50	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m) >225	<b>6</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>58</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>14</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>128</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	<b>226</b>	---	---
Zinc	ppm	ASTM D5185(m)	<b>26</b>	---	---
Sulfur	ppm	ASTM D5185(m)	<b>1252</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>3</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>5</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	---	---



# OIL ANALYSIS REPORT

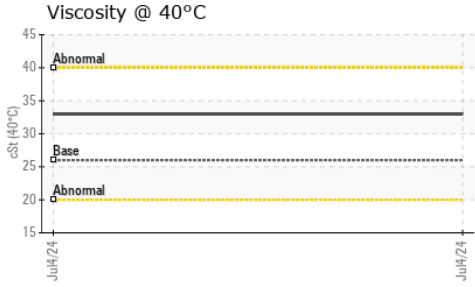


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	<b>33.0</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

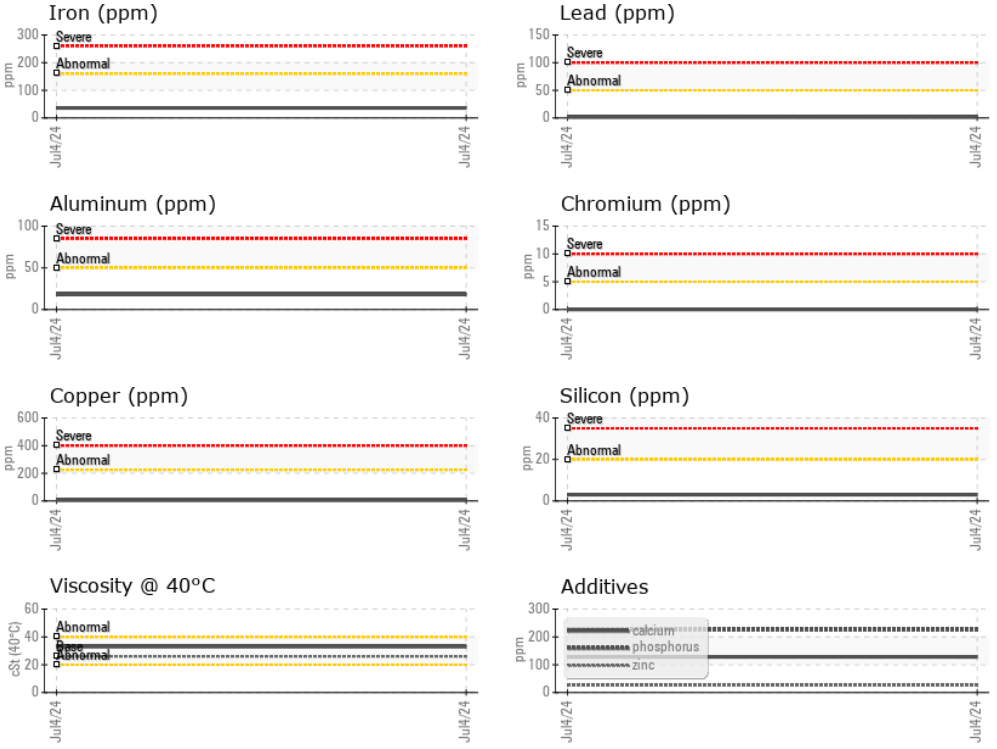

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0125476  
**Lab Number** : 02645927  
**Unique Number** : 5811479  
**Test Package** : MOB 1  
**Received** : 05 Jul 2024  
**Tested** : 05 Jul 2024  
**Diagnosed** : 05 Jul 2024 - Wes Davis

**GFL Environmental - 209 - Hamilton**  
 560 Seaman Street  
 Stoney Creek, ON  
 CA L8E 3X7  
 Contact: Fred Carleton  
 fred.carleton@gflenv.com  
 T: (289)925-6693  
 F: (905)664-9008

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.