




OIL ANALYSIS REPORT

Sample Rating Trend

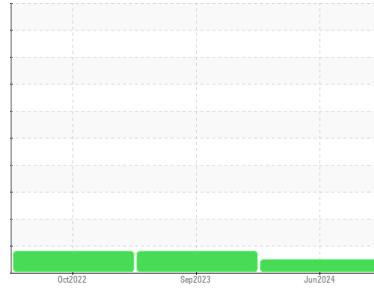

NORMAL



Machine Id

401024

Component

Transmission (Auto)

Fluid

PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0112433	GFL0091612	GFL0060242
Sample Date	Client Info		27 Jun 2024	13 Sep 2023	25 Oct 2022
Machine Age	kms	Client Info	567778	0	16804
Oil Age	kms	Client Info	0	0	1030
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184*	>50	0	0	0	
Iron	ppm	ASTM D5185(m)	>160	59	133	114
Chromium	ppm	ASTM D5185(m)	>5	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>50	30	73	61
Lead	ppm	ASTM D5185(m)	>50	7	19	15
Copper	ppm	ASTM D5185(m)	>225	54	123	114
Tin	ppm	ASTM D5185(m)	>10	3	8	6
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	78	90	132	149
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	<1	<1
Manganese	ppm	ASTM D5185(m)		<1	1	1
Magnesium	ppm	ASTM D5185(m)	0	1	1	<1
Calcium	ppm	ASTM D5185(m)	113	115	102	100
Phosphorus	ppm	ASTM D5185(m)	222	256	399	411
Zinc	ppm	ASTM D5185(m)		15	29	24
Sulfur	ppm	ASTM D5185(m)	1326	1557	1838	1940
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	6	9	9
Sodium	ppm	ASTM D5185(m)		7	17	15
Potassium	ppm	ASTM D5185(m)	>20	1	3	2

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	1.4	1.79	1.89	1.89

