




OIL ANALYSIS REPORT

Sample Rating Trend

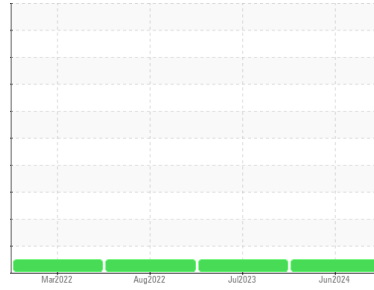

NORMAL



Machine Id
901075
 Component
Transmission (Auto)
 Fluid

PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0112440	GFL0084299	GFL0057791
Sample Date	Client Info		27 Jun 2024	26 Jul 2023	30 Aug 2022
Machine Age	hrs	Client Info	15601	133823	11010
Oil Age	hrs	Client Info	0	0	2094
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*	>50	1	15	0
Iron	ppm	ASTM D5185(m) >160	73	76	60
Chromium	ppm	ASTM D5185(m) >5	<1	<1	0
Nickel	ppm	ASTM D5185(m) >5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	0	0
Silver	ppm	ASTM D5185(m) >5	0	<1	0
Aluminum	ppm	ASTM D5185(m) >50	22	28	22
Lead	ppm	ASTM D5185(m) >50	24	37	35
Copper	ppm	ASTM D5185(m) >225	15	18	12
Tin	ppm	ASTM D5185(m) >10	2	3	2
Antimony	ppm	ASTM D5185(m)	0	<1	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 78	95	118	126
Barium	ppm	ASTM D5185(m)	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	<1	<1
Manganese	ppm	ASTM D5185(m)	<1	1	1
Magnesium	ppm	ASTM D5185(m) 0	2	3	<1
Calcium	ppm	ASTM D5185(m) 113	116	112	104
Phosphorus	ppm	ASTM D5185(m) 222	259	332	307
Zinc	ppm	ASTM D5185(m)	5	8	4
Sulfur	ppm	ASTM D5185(m) 1326	1497	1627	1586
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	6	5	5
Sodium	ppm	ASTM D5185(m)	5	6	6
Potassium	ppm	ASTM D5185(m) >20	1	2	2

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 1.4	1.62	1.44	1.27




OIL ANALYSIS REPORT

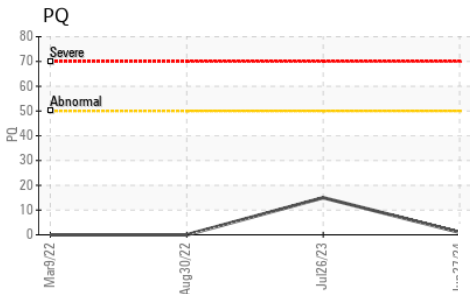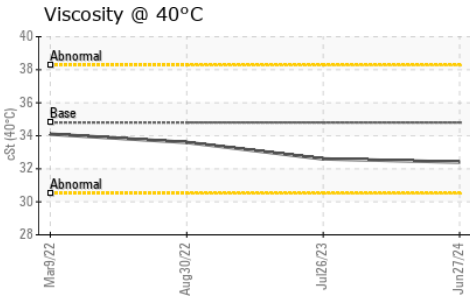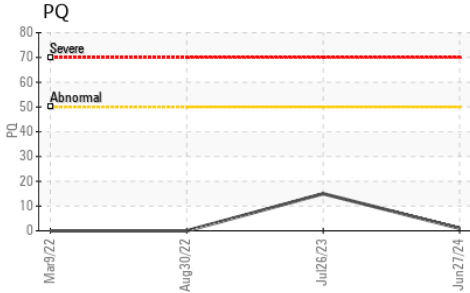









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	34.8	32.4	32.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

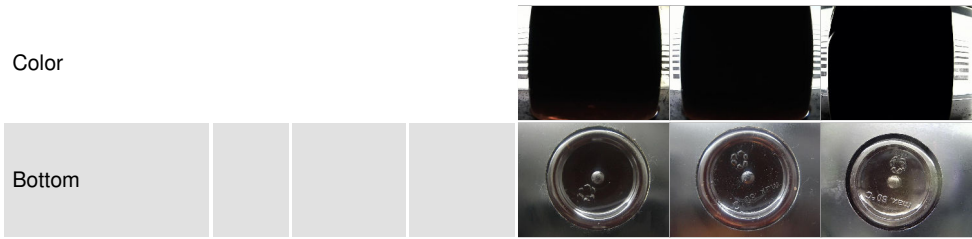

GRAPHS

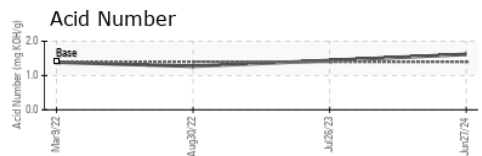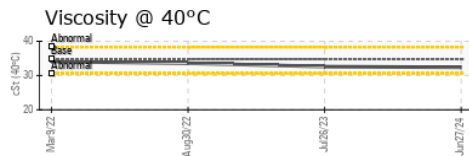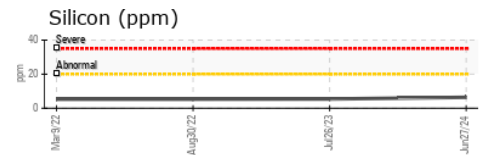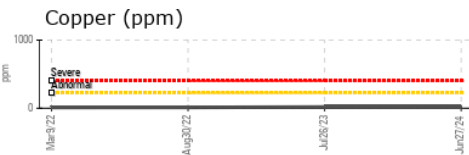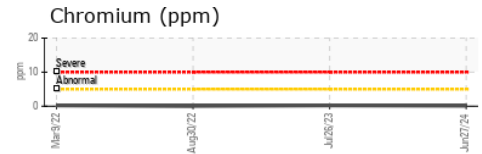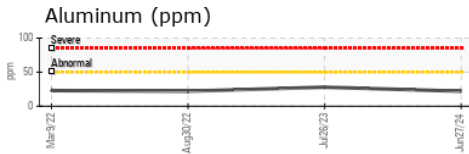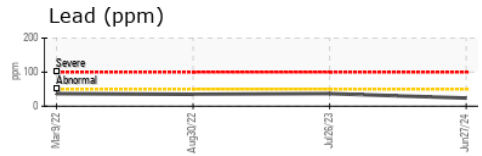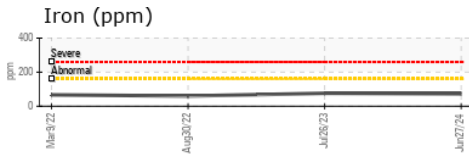

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0112440
Lab Number : 02645930
Unique Number : 5811482
Test Package : MOB 2 (Additional Tests: PQ, TAN Man)

GFL Environmental - 550 - Rocky View County
 220 Carmek Blvd
 Rocky View County, AB
 CA T1X 1X1
 Contact: GFL Calgary
 calgarymaintenance@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (403)369-6163