


# OIL ANALYSIS REPORT

Sample Rating Trend

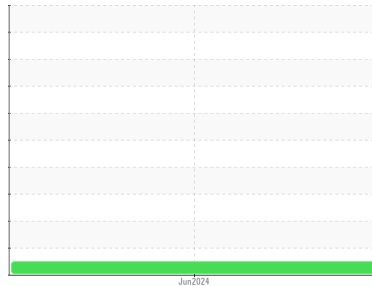

Machine Id  
**THOMAS 3313**  
Component  
**Diesel Engine**  
Fluid  
{not provided} (--- GAL)

## DIAGNOSIS

**Recommendation**  
Resample at the next service interval to monitor.  
Please specify the brand, type, and viscosity of the oil on your next sample.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0089720</b>	---	---
Sample Date	Client Info			<b>05 Jun 2024</b>	---	---
Machine Age	kms	Client Info		<b>238612</b>	---	---
Oil Age	kms	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2		<b>NEG</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	<b>37</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>11</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>4</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>58</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>934</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>979</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>986</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1133</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2486</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>9</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>3</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.6</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.6</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.9</b>	---	---

# OIL ANALYSIS REPORT






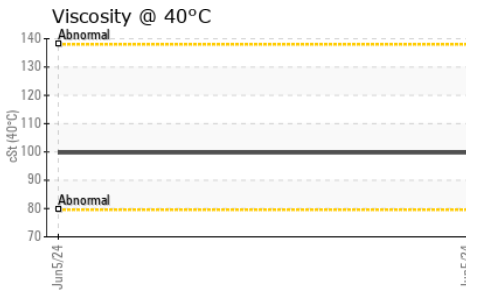
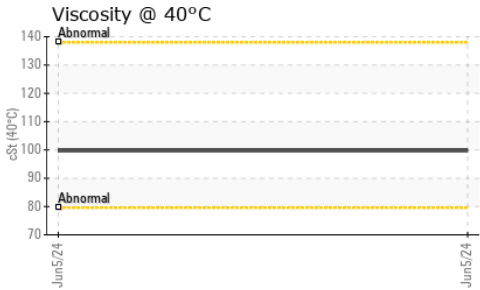
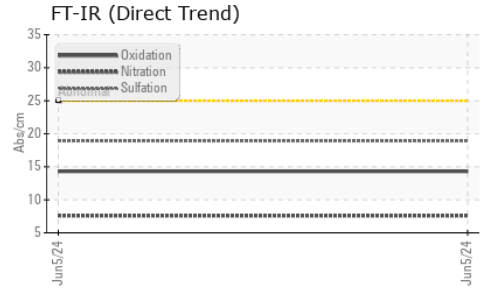


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>14.3</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		<b>99.7</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		<b>13.8</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		<b>139</b>	---	---

## GRAPHS

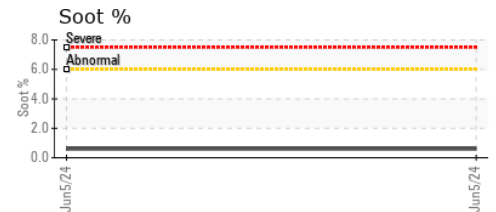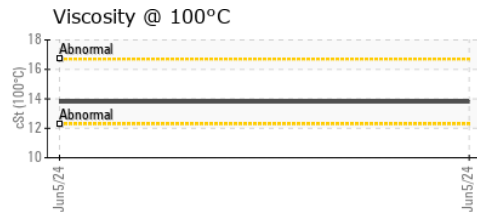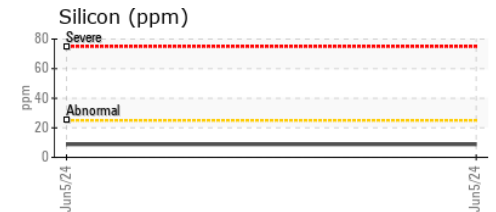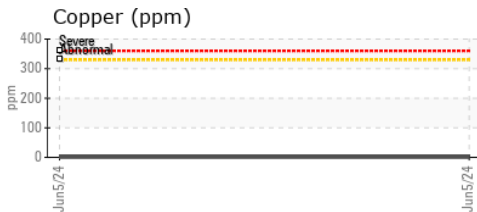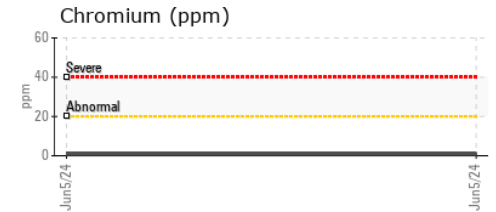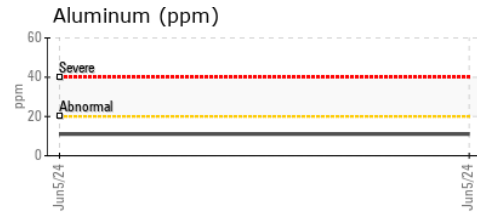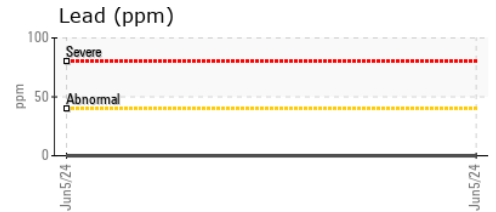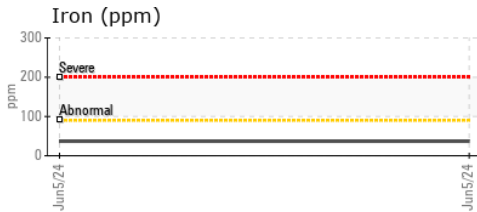

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0089720 **Received** : 09 Jul 2024  
**Lab Number** : **02646613** **Tested** : 09 Jul 2024  
**Unique Number** : 5812165 **Diagnosed** : 09 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI, Visual )

**ICSB - Brantford**  
 567 Oak Park Rd.  
 Brantford, ON  
 CA N3T 5L8  
 Contact: Doug Hall  
 Djhall@sharpbus.com  
 T: (519)751-3434  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.