




# OIL ANALYSIS REPORT

Sample Rating Trend

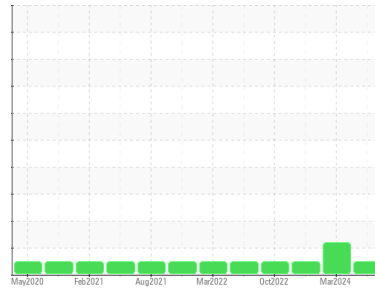

**NORMAL**



Machine Id  
**727002**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0113248</b>	GFL0102895	GFL0078528
Sample Date	Client Info		<b>09 Jul 2024</b>	13 Mar 2024	12 Apr 2023
Machine Age	kms	Client Info	<b>0</b>	0	34121
Oil Age	kms	Client Info	<b>35375</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	<b>7</b>	10	10
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	1	1
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	2
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>14</b>	44	5
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>50</b>	41	56
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>804</b>	502	919
Calcium	ppm	ASTM D5185(m)	1070	<b>1209</b>	1598	1110
Phosphorus	ppm	ASTM D5185(m)	1150	<b>957</b>	747	1069
Zinc	ppm	ASTM D5185(m)	1270	<b>1142</b>	832	1153
Sulfur	ppm	ASTM D5185(m)	2060	<b>2518</b>	2117	2621
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	3	2
Sodium	ppm	ASTM D5185(m)		<b>3</b>	2	1
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	<1	<1
Fuel	%	ASTM D7593*	>3.0	<b>0.0</b>	▲ 3.3	<1.0

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	<b>0.2</b>	2.3	1.6
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.4</b>	8.0	6.5
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>18.9</b>	25.3	19.9



# OIL ANALYSIS REPORT






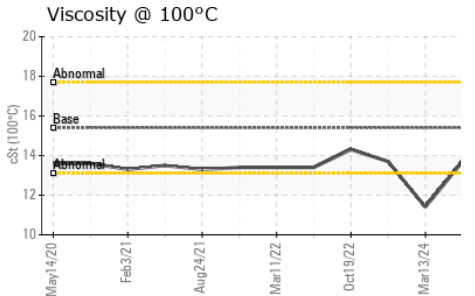
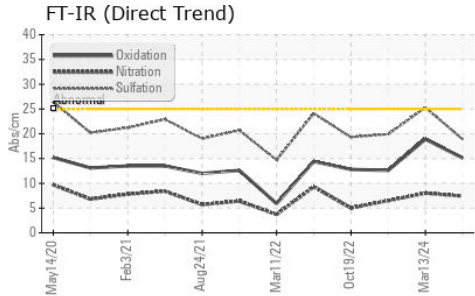
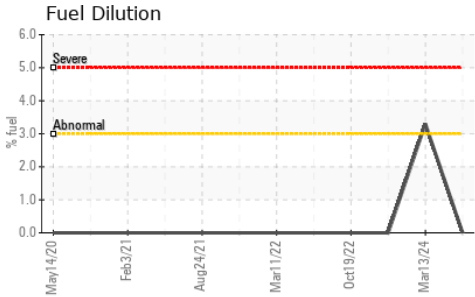


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>15.1</b>	18.9	12.6

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>13.7</b>	▲ 11.4	13.7

## GRAPHS

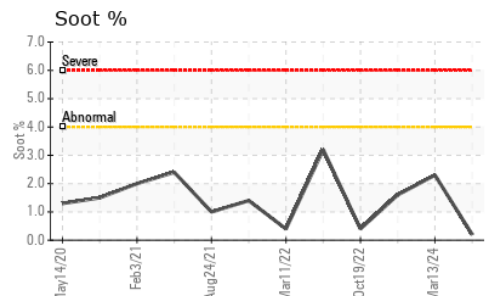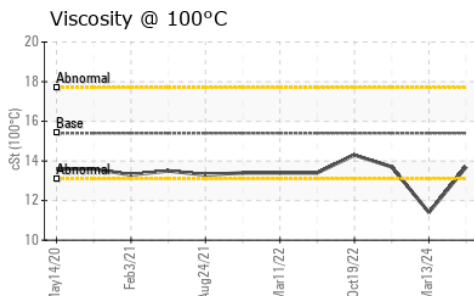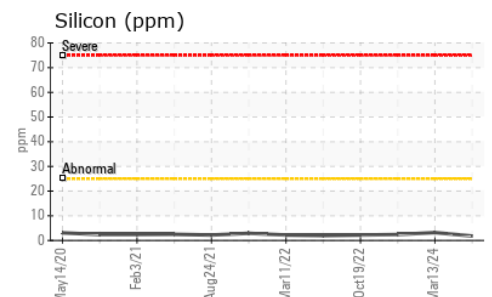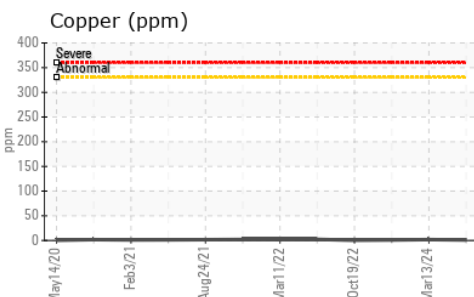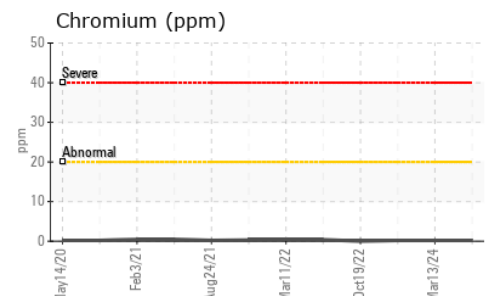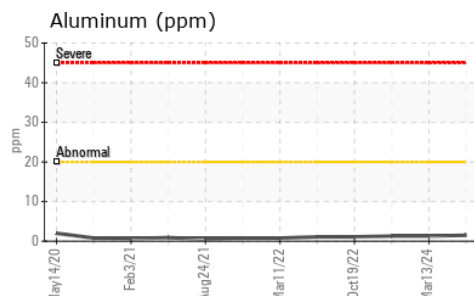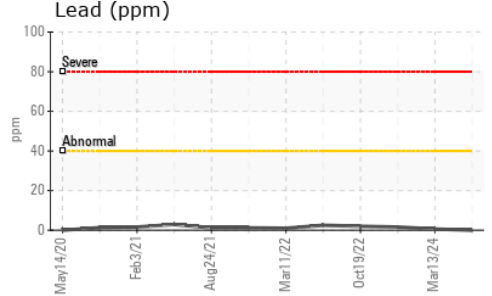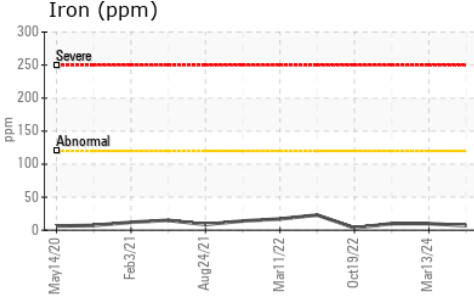

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113248 **Received** : 10 Jul 2024  
**Lab Number** : **02646872** **Tested** : 11 Jul 2024  
**Unique Number** : 5812424 **Diagnosed** : 11 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )

**GFL Environmental - 246 - Windsor**  
 2700 Deziel Dr  
 Windsor, ON  
 CA N8W 5H8  
 Contact: Dave Varga  
 dvarga@gflenv.com  
 T: (519)944-8009  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.