




OIL ANALYSIS REPORT

Sample Rating Trend

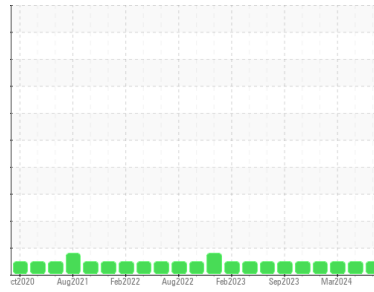

NORMAL



Area
[1306515]

Machine Id
514002

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | GFL0124692 | GFL0118533 | GFL0110672 |
| Sample Date | Client Info | | | 05 Jul 2024 | 24 May 2024 | 26 Mar 2024 |
| Machine Age | hrs | Client Info | | 30746 | 30247 | 29738 |
| Oil Age | hrs | Client Info | | 600 | 0 | 0 |
| Oil Changed | Client Info | | | Changed | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | >165 | 6 | 6 | 6 |
| Chromium | ppm | ASTM D5185(m) | >5 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) | >4 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >2 | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 1 | <1 | 1 |
| Lead | ppm | ASTM D5185(m) | >150 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185(m) | >90 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185(m) | >5 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |



| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | 0 | 1 | 2 | 3 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 60 | 58 | 58 | 59 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) | 1010 | 966 | 964 | 985 |
| Calcium | ppm | ASTM D5185(m) | 1070 | 1039 | 1037 | 1044 |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 996 | 990 | 1002 |
| Zinc | ppm | ASTM D5185(m) | 1270 | 1197 | 1183 | 1190 |
| Sulfur | ppm | ASTM D5185(m) | 2060 | 2566 | 2527 | 2570 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >35 | 2 | 1 | 2 |
| Sodium | ppm | ASTM D5185(m) | | 3 | 5 | 3 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | <1 | <1 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* | >7.5 | 0.1 | 0.1 | 0.1 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 7.2 | 7.0 | 6.5 |
| Sulfation | Abs./1mm | ASTM D7415* | >30 | 18.2 | 18.7 | 18.3 |



OIL ANALYSIS REPORT







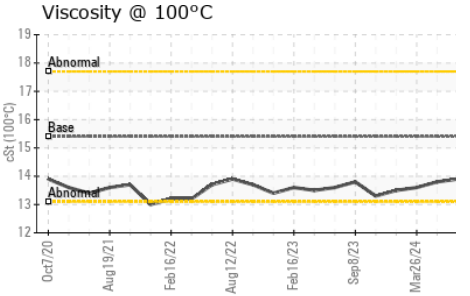
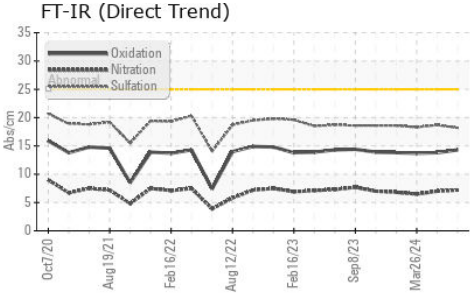


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 14.3 | 13.8 | 13.7 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|------------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.4 | 13.9 | 13.8 | 13.6 |

GRAPHS

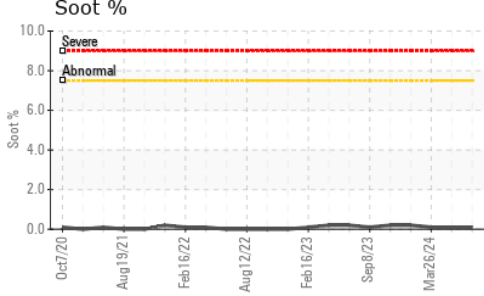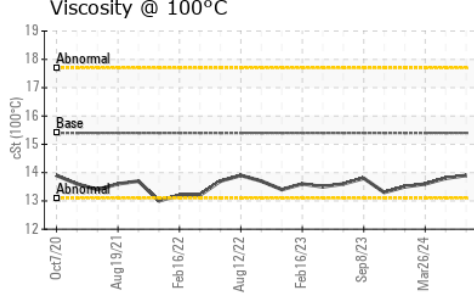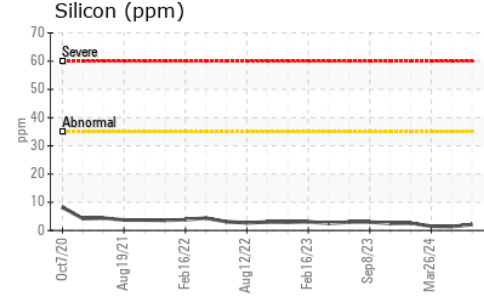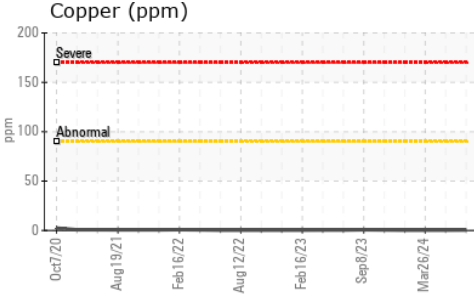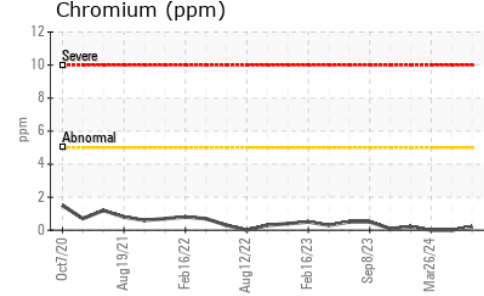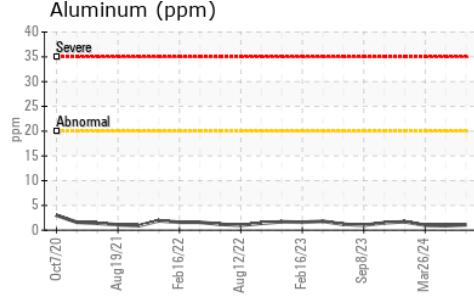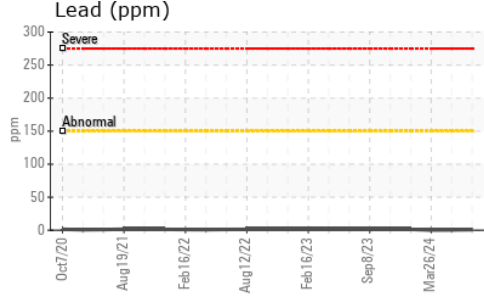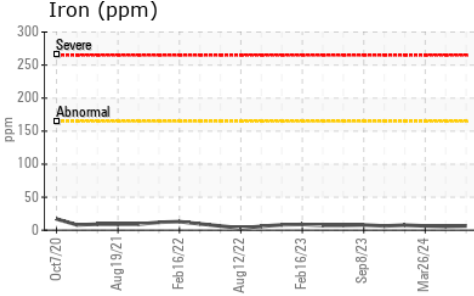

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0124692
Lab Number : **02646893**
Unique Number : 5812445
Test Package : MOB 1

GFL Environmental - 207 - Pickering SW
 1034 TOY AVENUE, PICKERING YARD
 PICKERING, ON
 CA L1W 3P1
 Contact: Ian Patton
 ipatton@gflenv.com
 T: (905)831-6297
 F: (905)426-3577

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.