


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

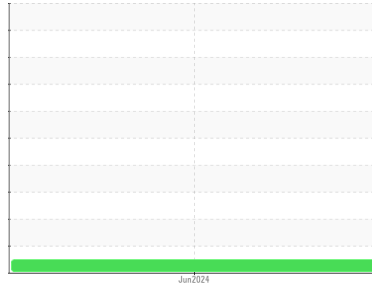

Machine Id  
**SILO #27**

Component  
**Gearbox**

Fluid  
**PETRO CANADA ENDURATEX EP 220 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC0087804</b>	---	---
Sample Date	Client Info		<b>25 Jun 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>24</b>	---	---
Iron	ppm	ASTM D5185(m) >200	<b>130</b>	---	---
Chromium	ppm	ASTM D5185(m) >15	<b>2</b>	---	---
Nickel	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m) >100	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >200	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >25	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 60	<b>16</b>	---	---
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m) 0	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m) 0	<b>3</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 270	<b>197</b>	---	---
Zinc	ppm	ASTM D5185(m) 0	<b>5</b>	---	---
Sulfur	ppm	ASTM D5185(m) 11200	<b>5999</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---



## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>2</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.40	<b>0.48</b>	---	---

# OIL ANALYSIS REPORT

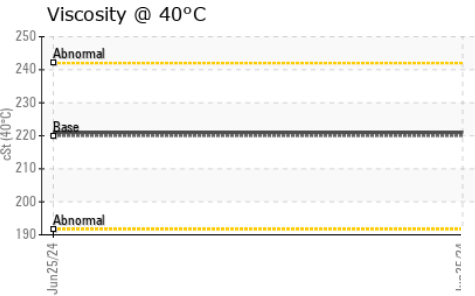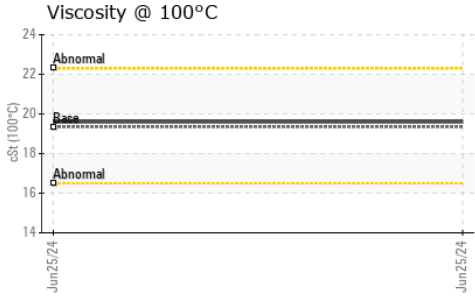






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	220	221	---
Visc @ 100°C	cSt	ASTM D7279(m)	19.35	19.6	---
Viscosity Index (VI)	Scale	ASTM D2270*	99	100	---

### SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

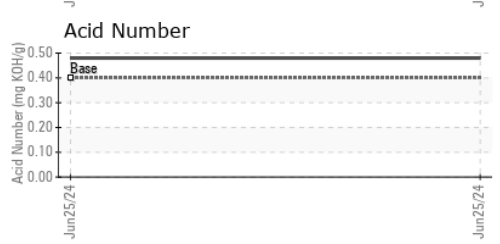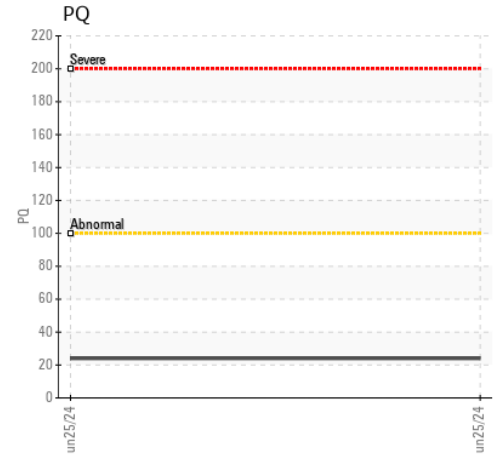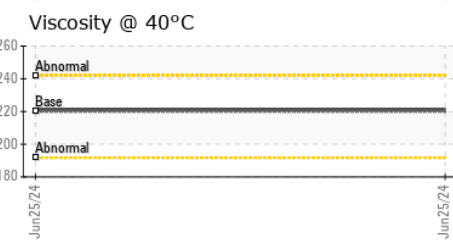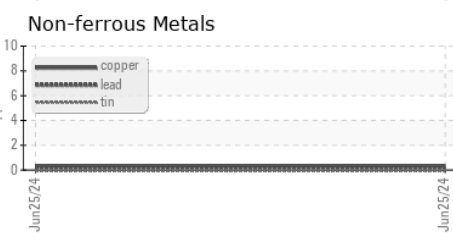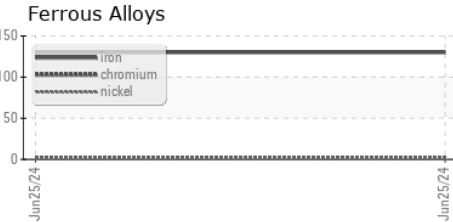

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0087804  
**Lab Number** : 02647433  
**Unique Number** : 5812985  
**Test Package** : IND 2 ( Additional Tests: KV100, TAN Man, VI )  
**Received** : 11 Jul 2024  
**Tested** : 11 Jul 2024  
**Diagnosed** : 11 Jul 2024 - Wes Davis

**SAPUTO FOODS LTD**  
 284 HOPE STREET WEST  
 TAVISTOCK, ON  
 CA N0B 2R0  
 Contact: Brian Schwartzentruber  
 bschwartzentruber@saputo.com  
 T: (519)655-2337  
 F: (519)655-3449

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.