




OIL ANALYSIS REPORT

Sample Rating Trend

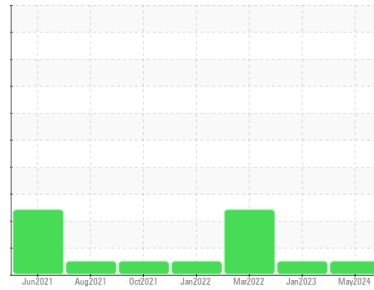

NORMAL



Machine Id
928009
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0094975 | GFL0044755 | GFL0044662 |
| Sample Date | Client Info | | 10 May 2024 | 11 Jan 2023 | 20 Mar 2022 |
| Machine Age | hrs | Client Info | 15381 | 12668 | 10843 |
| Oil Age | hrs | Client Info | 600 | 600 | 600 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | NORMAL | NORMAL | ABNORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | 0.0 | ▲ 0.085 |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) | >120 | 6 | 18 | 8 |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | <1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >5 | 0 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | <1 | 0 |
| Silver | ppm | ASTM D5185(m) | >2 | <1 | <1 | <1 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 1 | 3 | 2 |
| Lead | ppm | ASTM D5185(m) | >40 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185(m) | >330 | <1 | 1 | 2 |
| Tin | ppm | ASTM D5185(m) | >15 | 0 | <1 | <1 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 0 | 2 | 2 | 14 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 60 | 58 | 59 | 56 |
| Manganese | ppm | ASTM D5185(m) | 0 | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185(m) | 1010 | 934 | 984 | 947 |
| Calcium | ppm | ASTM D5185(m) | 1070 | 1015 | 1111 | 1112 |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 970 | 1026 | 1050 |
| Zinc | ppm | ASTM D5185(m) | 1270 | 1151 | 1221 | 1224 |
| Sulfur | ppm | ASTM D5185(m) | 2060 | 2554 | 2221 | 2623 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | 0 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|---|
| Silicon | ppm | ASTM D5185(m) | >25 | 2 | 5 | 4 |
| Sodium | ppm | ASTM D5185(m) | | 2 | 8 | 6 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | <1 | 4 |


INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | >4 | 0 | 0.1 | 0.2 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 5.4 | 4.9 | 9.4 |
| Sulfation | Abs./1mm | ASTM D7415* | >30 | 17.9 | 16.0 | 21.3 |




OIL ANALYSIS REPORT

FT-IR (Direct Trend)

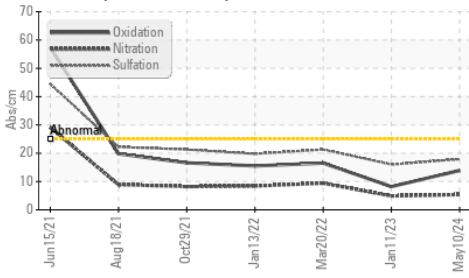

Viscosity @ 100°C

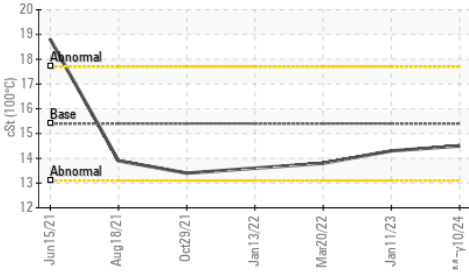

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|-----------|----------------------|---------|----------|----------|
| Oxidation | Abs./1mm ASTM D7414* | 13.9 | 8.2 | 16.5 |


VISUAL

| method | limit/base | current | history1 | history2 |
|------------------|----------------|---------|----------|----------|
| White Metal | scalar Visual* | NONE | --- | --- |
| Yellow Metal | scalar Visual* | NONE | --- | --- |
| Precipitate | scalar Visual* | NONE | --- | --- |
| Silt | scalar Visual* | NONE | --- | --- |
| Debris | scalar Visual* | NONE | --- | --- |
| Sand/Dirt | scalar Visual* | NONE | --- | --- |
| Appearance | scalar Visual* | NORML | --- | --- |
| Odor | scalar Visual* | NORML | NORML | NORML |
| Emulsified Water | scalar Visual* | >0.2 | NEG | ▲.2% |
| Free Water | scalar Visual* | NEG | NEG | NEG |

FLUID PROPERTIES

| method | limit/base | current | history1 | history2 |
|--------------|-------------------|---------|----------|----------|
| Visc @ 100°C | cSt ASTM D7279(m) | 14.5 | 14.3 | 13.8 |

GRAPHS

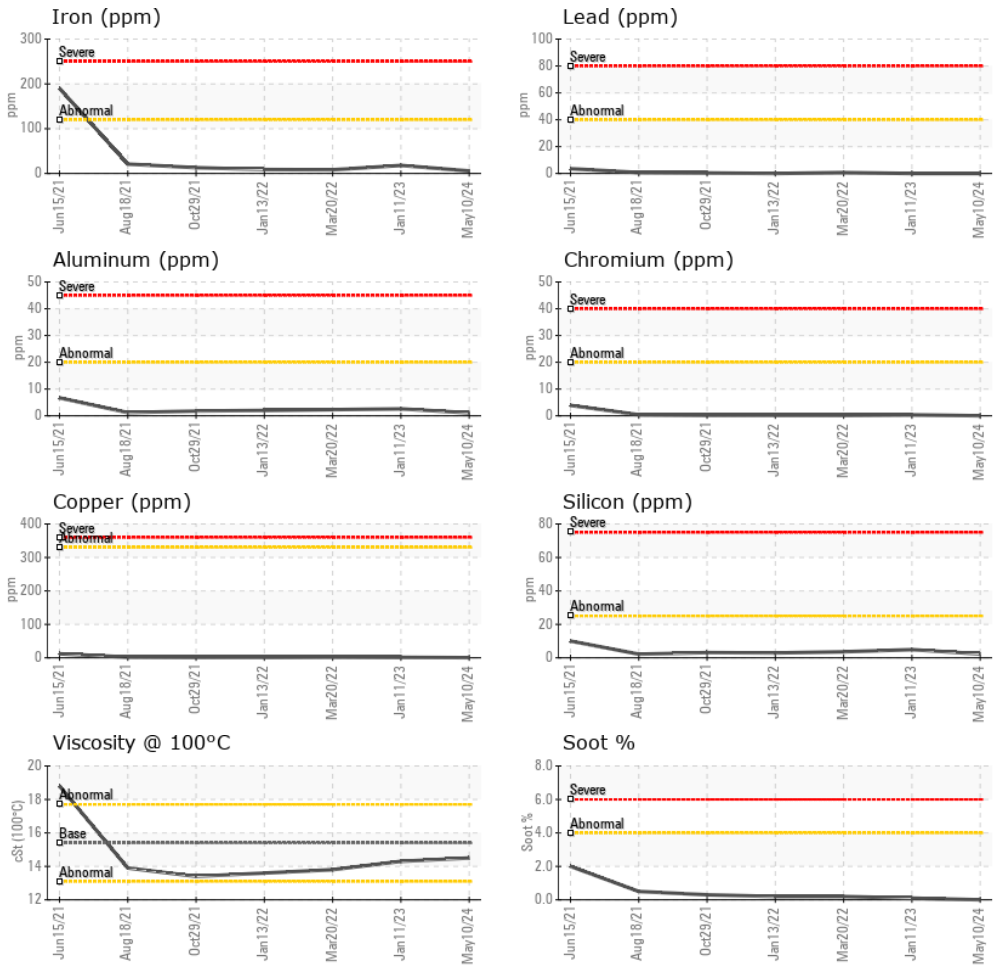

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0094975
Lab Number : 02647514
Unique Number : 5813066
Test Package : MOB 1 (Additional Tests: Visual)

GFL Environmental - 577 - First Class
 8540 Chilliwack Mountain Rd,
 Chilliwack, BC
 CA V2R 3W8

Received : 12 Jul 2024
Tested : 12 Jul 2024
Diagnosed : 12 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Derek Jessop
 djessop@gflenv.com
 T: (604)798-5301
 F: