


OIL ANALYSIS REPORT



Machine Id
23
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP 5W40 (--- GAL)

Sample Rating Trend

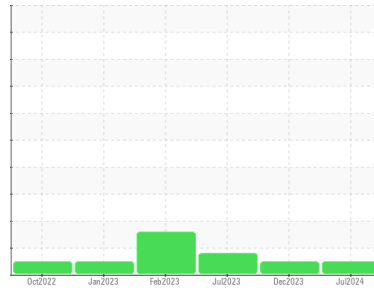

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0035318	PC0066787	PC0064250
Sample Date	Client Info		05 Jul 2024	28 Dec 2023	23 Jul 2023
Machine Age	hrs	Client Info	1820	1278	1022
Oil Age	hrs	Client Info	292	256	500
Oil Changed	Client Info		Not Chngd	Not Chngd	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>80	8	9	14
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>30	4	9	3
Lead	ppm	ASTM D5185(m)	>30	<1	3	10
Copper	ppm	ASTM D5185(m)	>150	56	119	▲ 401
Tin	ppm	ASTM D5185(m)	>5	2	2	4
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	65	37	36	36
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	65	57	59	56
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	1160	1082	1055	1062
Calcium	ppm	ASTM D5185(m)	820	817	850	984
Phosphorus	ppm	ASTM D5185(m)	1160	1133	938	964
Zinc	ppm	ASTM D5185(m)	1260	1194	1129	1167
Sulfur	ppm	ASTM D5185(m)	3000	2726	2702	2492
Lithium	ppm	ASTM D5185(m)		<1	<1	<1





CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	3	3	4
Sodium	ppm	ASTM D5185(m)		4	4	5
Potassium	ppm	ASTM D5185(m)	>20	7	17	4

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	8.2	8.1	8.7
Sulfation	Abs./1mm	ASTM D7415*	>30	20.3	20.7	21.4

OIL ANALYSIS REPORT

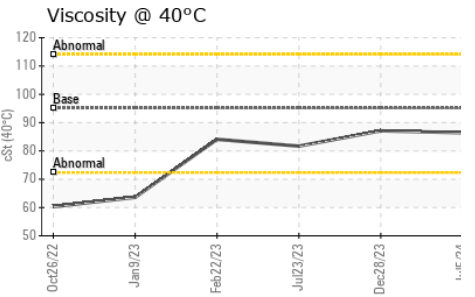
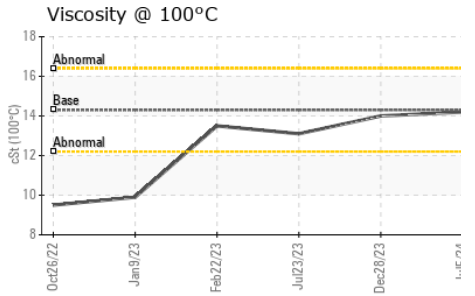
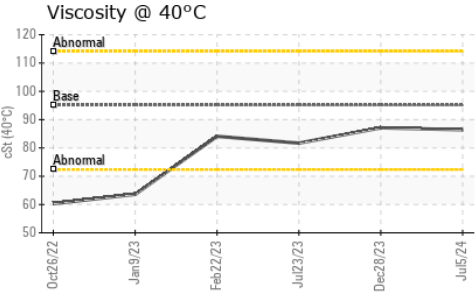
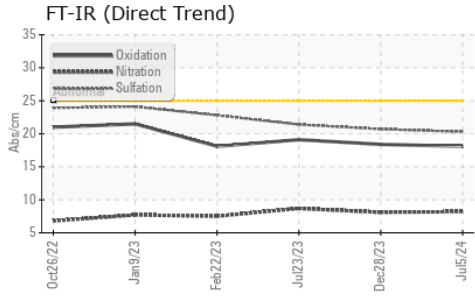


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	18.1	18.4	19.1
Base Number (BN)	mg KOH/g	ASTM D2896*	11.0	11.01	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	86.4	87.1	81.7
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	14.2	14.0	13.1
Viscosity Index (VI)	Scale	ASTM D2270*	169	170	165	161

GRAPHS

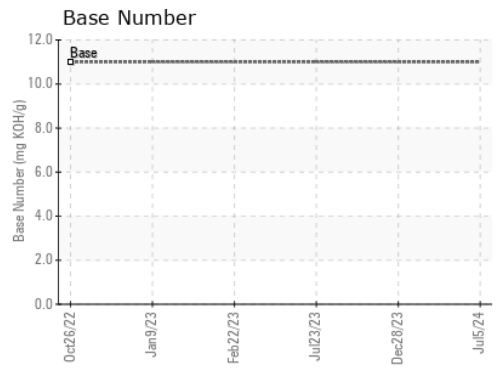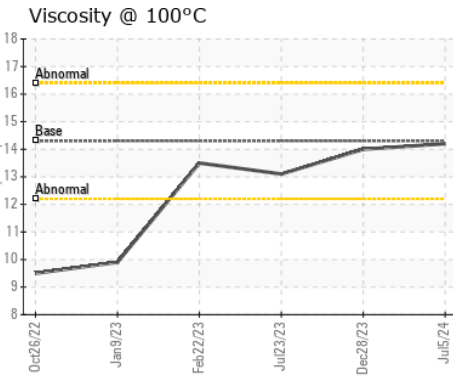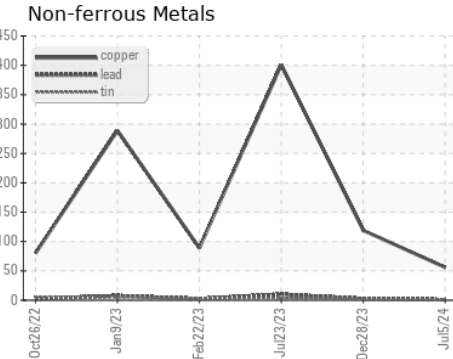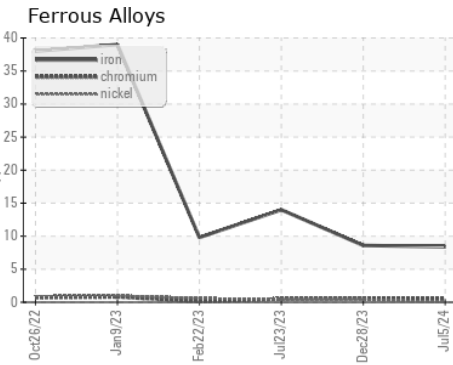

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0035318 **Received** : 16 Jul 2024
Lab Number : **02648060** **Tested** : 16 Jul 2024
Unique Number : 5813612 **Diagnosed** : 16 Jul 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: KV40, VI)

CITY OF KIMBERLEY
 340 SPOKANE ST
 KIMBERLEY, BC
 CA V1A 2E8
 Contact: Service Manager
 ddrouin@kimberley.ca
 T: (250)427-9675
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.