




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
413154
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

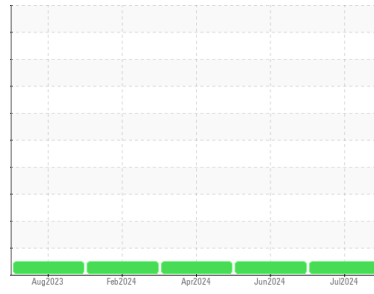

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0118987 | GFL0118977 | GFL0112567 |
| Sample Date | Client Info | | 05 Jul 2024 | 05 Jun 2024 | 06 Apr 2024 |
| Machine Age | hrs | Client Info | 2693 | 2426 | 1959 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | Changed | Changed | N/A |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) | >120 | 7 | 12 | 10 |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | <1 | 0 |
| Nickel | ppm | ASTM D5185(m) | >5 | <1 | 1 | 1 |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >2 | <1 | <1 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 1 | 2 | 1 |
| Lead | ppm | ASTM D5185(m) | >40 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185(m) | >330 | 3 | 9 | 32 |
| Tin | ppm | ASTM D5185(m) | >15 | 0 | <1 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 2 | 1 | 2 | 2 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 50 | 55 | 56 | 58 |
| Manganese | ppm | ASTM D5185(m) | 0 | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185(m) | 950 | 914 | 867 | 958 |
| Calcium | ppm | ASTM D5185(m) | 1050 | 999 | 993 | 1013 |
| Phosphorus | ppm | ASTM D5185(m) | 995 | 1003 | 959 | 982 |
| Zinc | ppm | ASTM D5185(m) | 1180 | 1137 | 1119 | 1135 |
| Sulfur | ppm | ASTM D5185(m) | 2600 | 2507 | 2378 | 2501 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS



| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|----------|----------|---|
| Silicon | ppm | ASTM D5185(m) | >25 | 4 | 3 | 1 |
| Sodium | ppm | ASTM D5185(m) | | 1 | <1 | 1 |
| Potassium | ppm | ASTM D5185(m) | >20 | 1 | 2 | 1 |

INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | >4 | 0.1 | 0.2 | 0.1 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 6.7 | 7.9 | 7.2 |
| Sulfation | Abs./1mm | ASTM D7415* | >30 | 18.6 | 19.3 | 19.2 |



OIL ANALYSIS REPORT







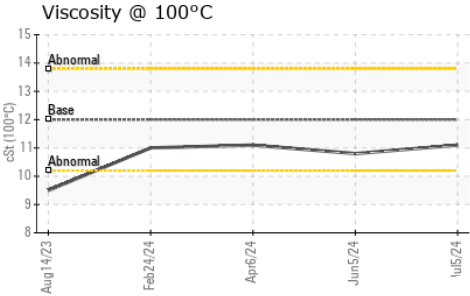
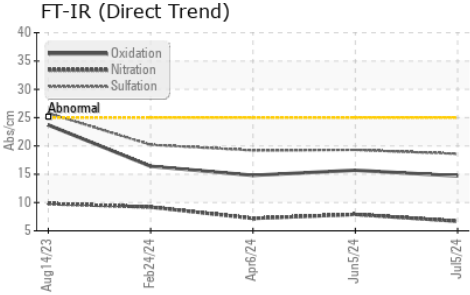


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 14.7 | 15.7 | 14.8 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | Visual* | NONE | VLITE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- | --- |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 12.00 | 11.1 | 10.8 | 11.1 |

GRAPHS

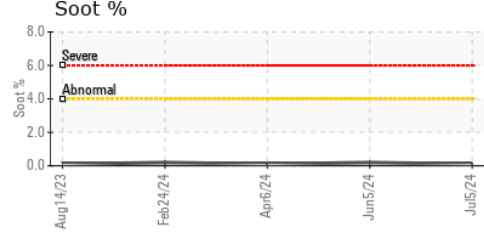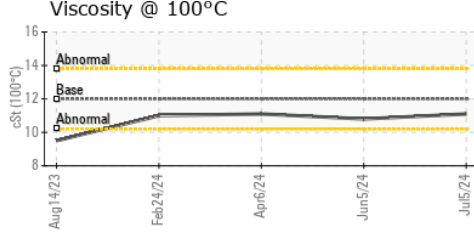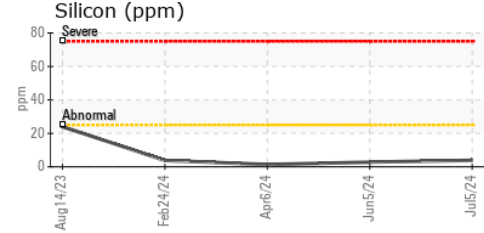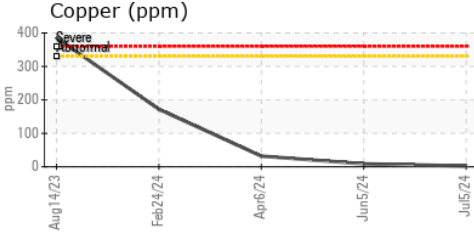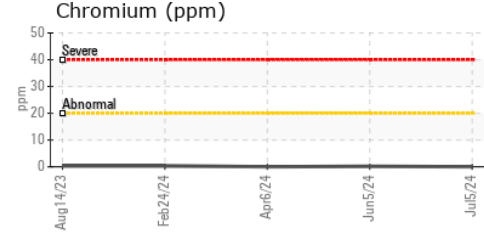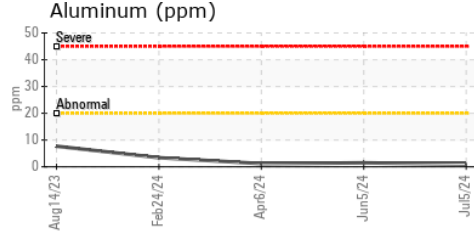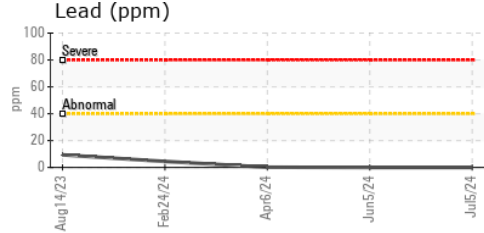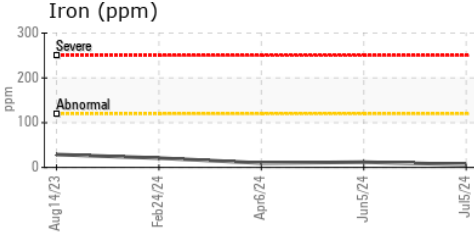

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118987
Lab Number : **02648605**
Unique Number : 5814157
Test Package : MOB 1 (Additional Tests: Visual)
Received : 18 Jul 2024
Tested : 18 Jul 2024
Diagnosed : 18 Jul 2024 - Kevin Marson

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.