




# OIL ANALYSIS REPORT

## Sample Rating Trend

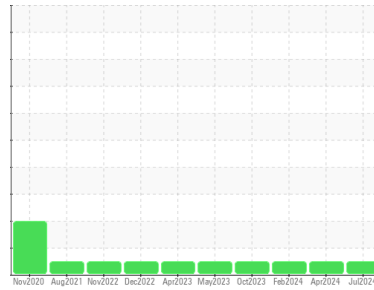

**NORMAL**



Machine Id  
**411004**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (25 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122286</b>	GFL0117913	GFL0111758
Sample Date	Client Info		<b>17 Jul 2024</b>	08 Apr 2024	06 Feb 2024
Machine Age	hrs	Client Info	<b>8571</b>	8571	8190
Oil Age	hrs	Client Info	<b>600</b>	600	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	<b>8</b>	6	9
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	<1	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	1	2
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>63</b>	10	21
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>84</b>	60	62
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>849</b>	944	914
Calcium	ppm	ASTM D5185(m)	1070	<b>1211</b>	1040	1121
Phosphorus	ppm	ASTM D5185(m)	1150	<b>913</b>	969	1027
Zinc	ppm	ASTM D5185(m)	1270	<b>1044</b>	1167	1191
Sulfur	ppm	ASTM D5185(m)	2060	<b>2377</b>	2482	2716
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	1	3
Sodium	ppm	ASTM D5185(m)		<b>1</b>	1	1
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	2

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	<b>0.2</b>	0.1	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.7</b>	6.9	8.2
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>20.8</b>	18.4	19.7



# OIL ANALYSIS REPORT







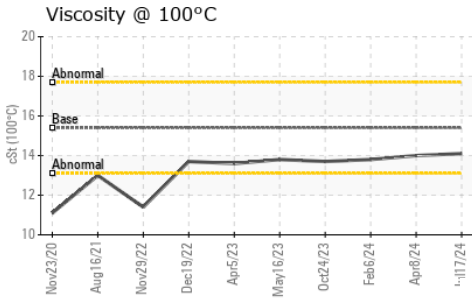
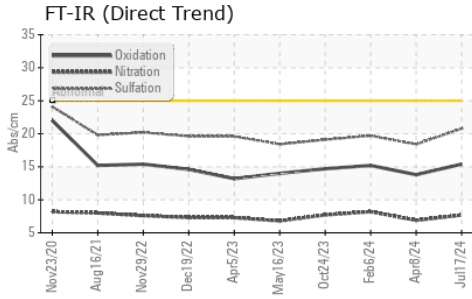


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>15.4</b>	13.8	15.2

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>14.1</b>	14.0	13.8

## GRAPHS

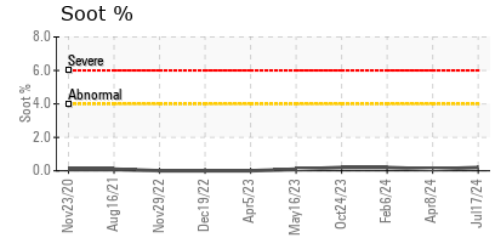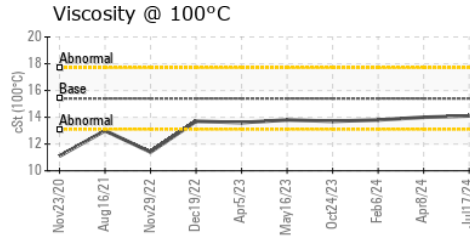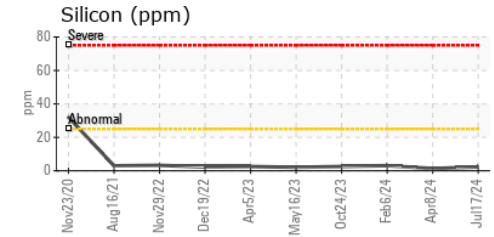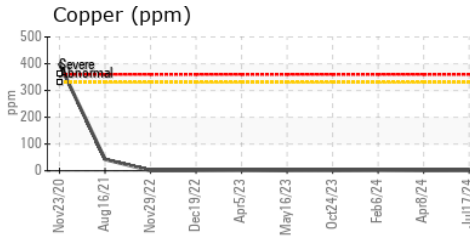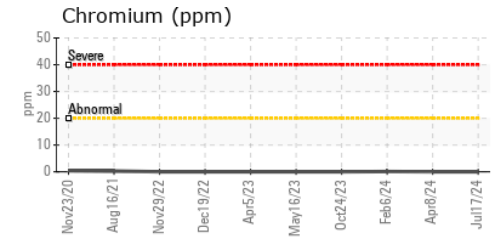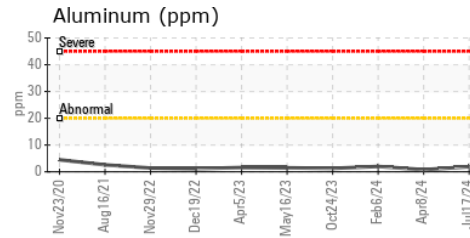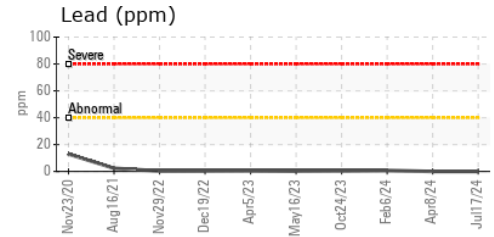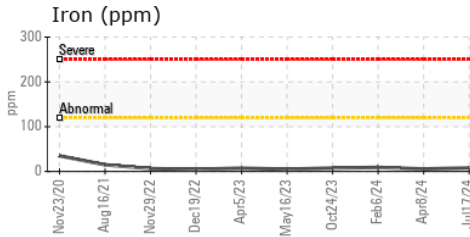

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0122286 **Received** : 18 Jul 2024  
**Lab Number** : **02648629** **Tested** : 18 Jul 2024  
**Unique Number** : 5814181 **Diagnosed** : 18 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**GFL Environmental - 217 - Aurora**  
 14131 BAYVIEW AVE, AURORA YARD  
 AURORA, ON  
 CA L4G 0K6  
 Contact: Mike Havens  
 MHavens@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: (905)713-2445