




OIL ANALYSIS REPORT

Sample Rating Trend

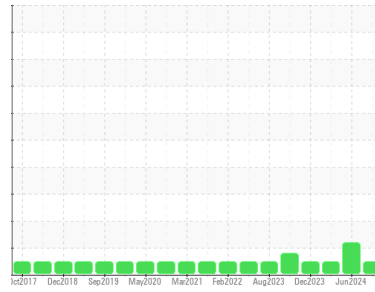

NORMAL



Machine Id

701030

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (19 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0122281 | GFL0122297 | GFL0107125 |
| Sample Date | Client Info | | 17 Jul 2024 | 12 Jun 2024 | 17 Jan 2024 |
| Machine Age | hrs | Client Info | 0 | 11361 | 0 |
| Oil Age | hrs | Client Info | 600 | 600 | 0 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | NORMAL | ABNORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | ▲ 2.4 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) | >100 | 9 | 25 | 12 |
| Chromium | ppm | ASTM D5185(m) | >20 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >4 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >20 | 4 | 7 | 7 |
| Lead | ppm | ASTM D5185(m) | >40 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185(m) | >330 | <1 | 2 | <1 |
| Tin | ppm | ASTM D5185(m) | >15 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 0 | 3 | 6 | 15 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 60 | 57 | 60 | 57 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | <1 | 0 |
| Magnesium | ppm | ASTM D5185(m) | 1010 | 935 | 946 | 908 |
| Calcium | ppm | ASTM D5185(m) | 1070 | 996 | 1036 | 1023 |
| Phosphorus | ppm | ASTM D5185(m) | 1150 | 1032 | 946 | 991 |
| Zinc | ppm | ASTM D5185(m) | 1270 | 1159 | 1166 | 1145 |
| Sulfur | ppm | ASTM D5185(m) | 2060 | 2581 | 2366 | 2688 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS


| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|----------|----------|---|
| Silicon | ppm | ASTM D5185(m) | >25 | 2 | 4 | 5 |
| Sodium | ppm | ASTM D5185(m) | | 4 | 7 | 4 |
| Potassium | ppm | ASTM D5185(m) | >20 | 6 | 10 | 8 |

INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | >3 | 0.1 | 0.5 | 0.1 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 6.5 | 10.6 | 6.8 |
| Sulfation | Abs./1mm | ASTM D7415* | >30 | 18.5 | 21.4 | 18.3 |



OIL ANALYSIS REPORT


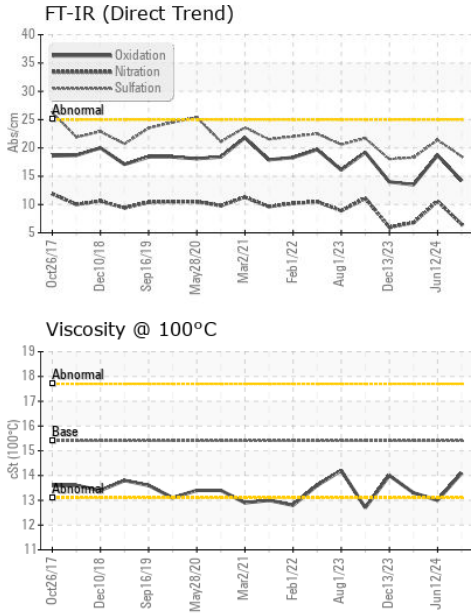


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|---------|----------|----------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 14.2 | 18.7 | 13.5 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|---------|----------|----------|
| White Metal | scalar | Visual* | NONE | VLITE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- | --- |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.4 | 14.1 | ▲ 13.0 | 13.3 |

GRAPHS

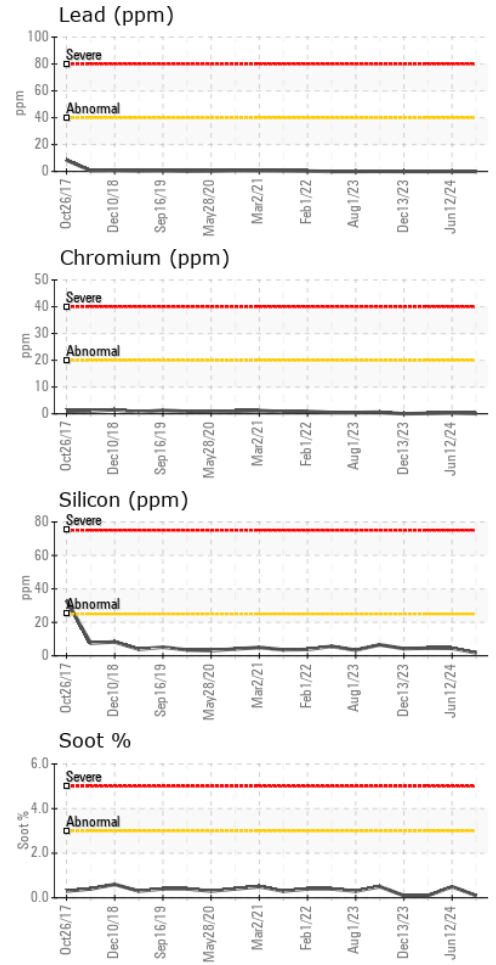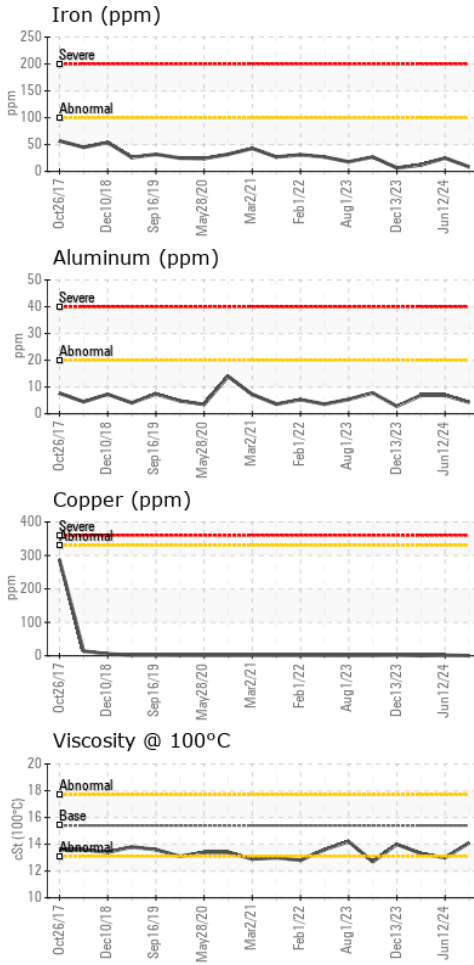

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0122281
Lab Number : 02648630
Unique Number : 5814182
Test Package : MOB 1 (Additional Tests: Visual)

GFL Environmental - 217 - Aurora
 14131 BAYVIEW AVE, AURORA YARD
 AURORA, ON
 CA L4G 0K6

Received : 18 Jul 2024
Tested : 18 Jul 2024
Diagnosed : 18 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Mike Havens
 MHavens@gflenv.com
 T:
 F: (905)713-2445