




# OIL ANALYSIS REPORT

Area  
**GFL029**  
 Machine Id  
**MACK 3390**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (56 QTS)**

Sample Rating Trend

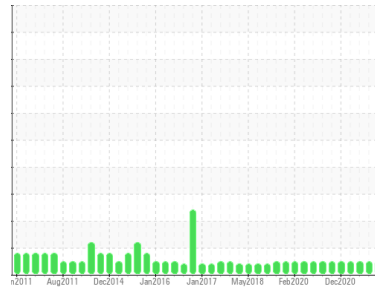

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0036730</b>	GFL0033183	GFL0023967
Sample Date	Client Info		<b>28 Dec 2021</b>	29 Sep 2021	13 Jul 2021
Machine Age	hrs	Client Info	<b>0</b>	19545	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>13</b>	9	16
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	2	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	4	4
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>4</b>	2	4
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>16</b>	8	9
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	50	56
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>798</b>	850	877
Calcium	ppm	ASTM D5185m 1070	<b>988</b>	1054	1020
Phosphorus	ppm	ASTM D5185m 1150	<b>1019</b>	903	983
Zinc	ppm	ASTM D5185m 1270	<b>1109</b>	1052	1119
Sulfur	ppm	ASTM D5185m 2060	<b>2658</b>	4356	2638

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	6	3
Sodium	ppm	ASTM D5185m	<b>3</b>	4	5
Potassium	ppm	ASTM D5185m >20	<b>0</b>	7	0

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.5</b>	0.4	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	6.5	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.1</b>	17.6	18.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.5</b>	12.9	14.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.8</b>	8.3	9.4











# OIL ANALYSIS REPORT

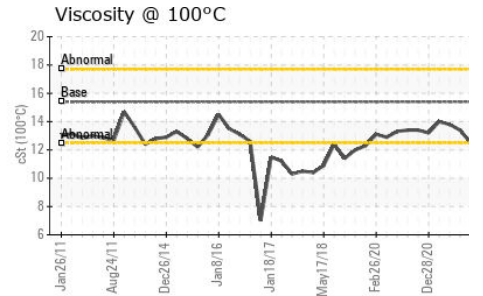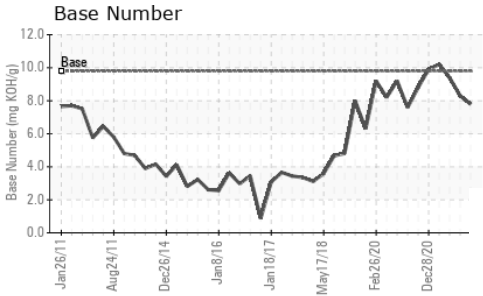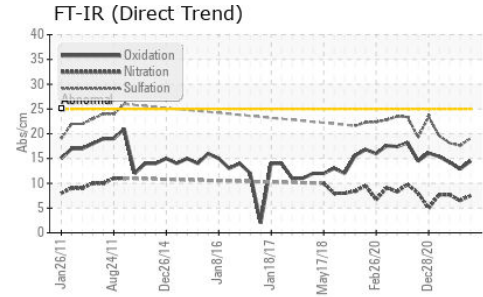

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.5	13.4

## GRAPHS

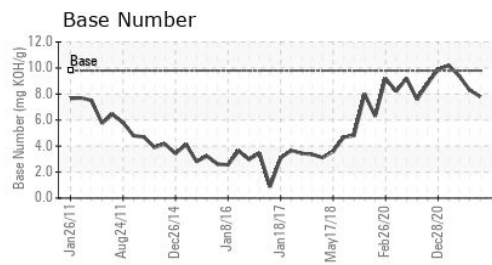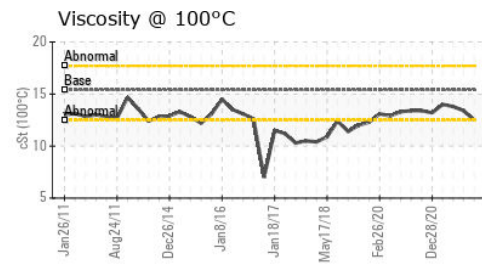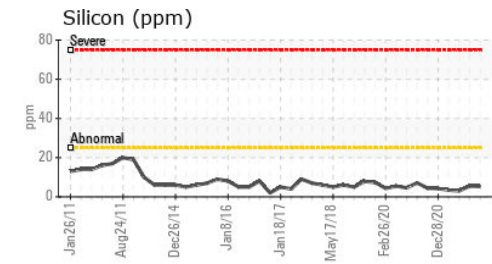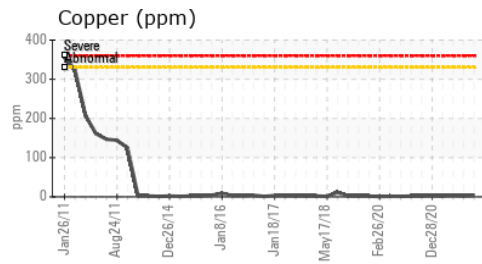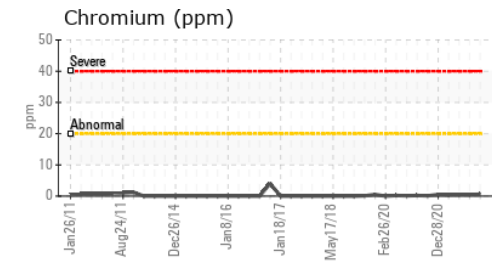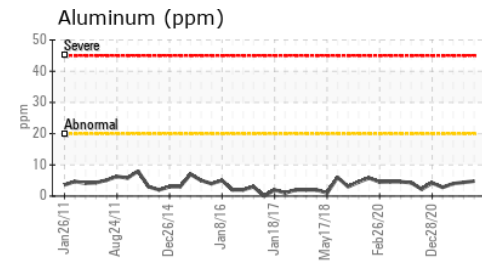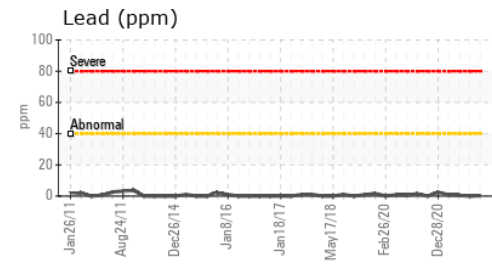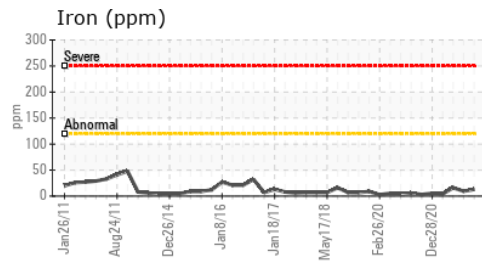

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0036730      **Received** : 04 Jan 2022  
**Lab Number** : 05436252      **Tested** : 05 Jan 2022  
**Unique Number** : 9800445      **Diagnosed** : 05 Jan 2022 - Angela Borella  
**Test Package** : MOB1+

GFL Environmental - 9999 - Moved No Longer Used Units

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US  
Contact:

T:  
F: