

# PROBLEM SUMMARY

Sample Rating Trend




ISO



Machine Id  
**PUMP 2**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE ULTRA 32 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

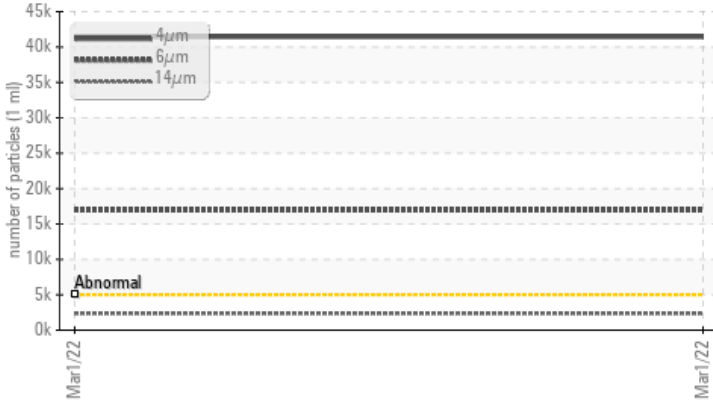

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	---	---
Particles >4µm	ASTM D7647	>5000	▲ <b>41439</b>	---	---
Particles >6µm	ASTM D7647	>1300	▲ <b>16947</b>	---	---
Particles >14µm	ASTM D7647	>160	▲ <b>2349</b>	---	---
Particles >21µm	ASTM D7647	>40	▲ <b>636</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>23/21/18</b>	---	---

Customer Id: GARGARIN  
 Sample No.: PCA0070729  
 Lab Number: 05486557  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

## HISTORICAL DIAGNOSIS

# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**PUMP 2**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE ULTRA 32 (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0070729</b>	---	---
Sample Date	Client Info	<b>01 Mar 2022</b>	---	---
Machine Age	hrs Client Info	<b>7153</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<b>&lt;1</b>	---	---
Chromium	ppm ASTM D5185m >10	<b>0</b>	---	---
Nickel	ppm ASTM D5185m	<b>0</b>	---	---
Titanium	ppm ASTM D5185m	<b>0</b>	---	---
Silver	ppm ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >10	<b>0</b>	---	---
Lead	ppm ASTM D5185m >10	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185m >75	<b>37</b>	---	---
Tin	ppm ASTM D5185m >10	<b>0</b>	---	---
Antimony	ppm ASTM D5185m	<b>0</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>0</b>	---	---
Barium	ppm ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Manganese	ppm ASTM D5185m	<b>0</b>	---	---
Magnesium	ppm ASTM D5185m	<b>3</b>	---	---
Calcium	ppm ASTM D5185m	<b>60</b>	---	---
Phosphorus	ppm ASTM D5185m	<b>352</b>	---	---
Zinc	ppm ASTM D5185m	<b>490</b>	---	---
Sulfur	ppm ASTM D5185m	<b>770</b>	---	---





## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>&lt;1</b>	---	---
Sodium	ppm ASTM D5185m	<b>0</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>0</b>	---	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>▲ 41439</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>▲ 16947</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>▲ 2349</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>▲ 636</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>10</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>▲ 23/21/18</b>	---	---

# OIL ANALYSIS REPORT

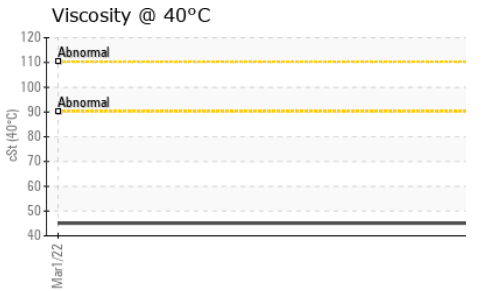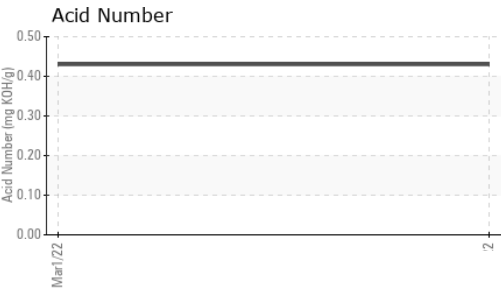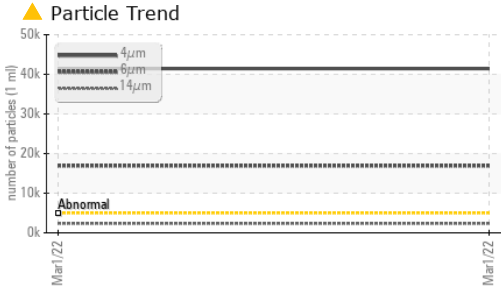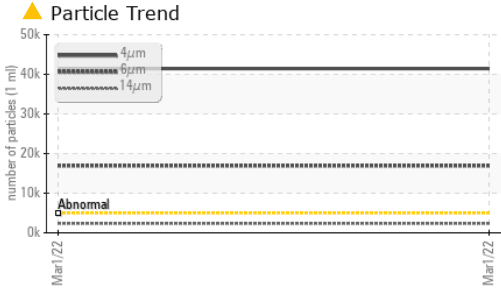

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.43</b>	---	---




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		<b>45.1</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

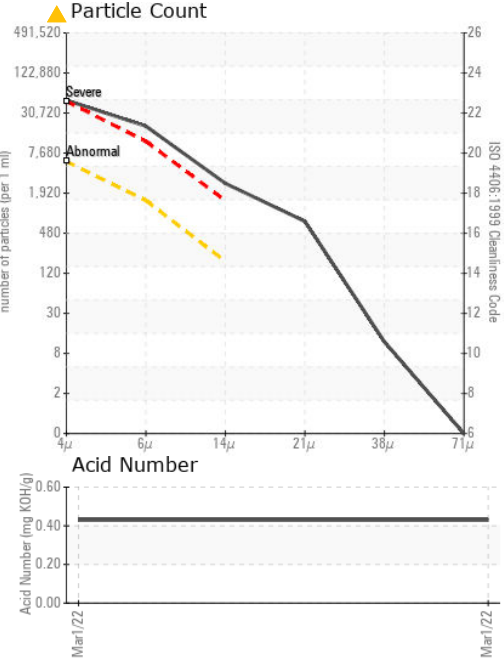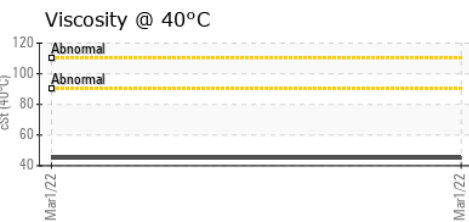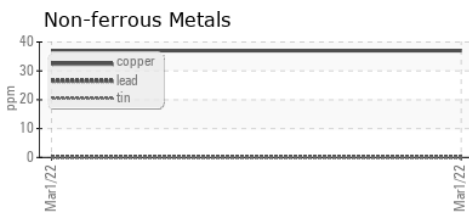

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0070729 **Received** : 08 Mar 2022  
**Lab Number** : 05486557 **Diagnosed** : 10 Mar 2022  
**Unique Number** : 9880776 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**GARY SANITATION**

GARY, IN  
 US  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: