

# PROBLEM SUMMARY

Sample Rating Trend




VISCOSITY




Machine Id  
**PUMP 4**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE ULTRA 32 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

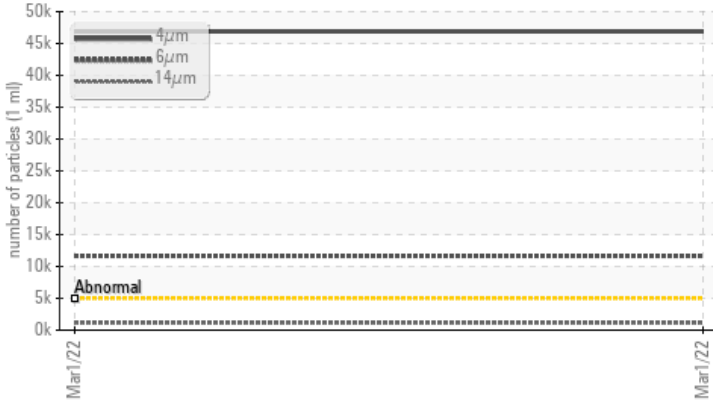

### ▲ Viscosity @ 40°C

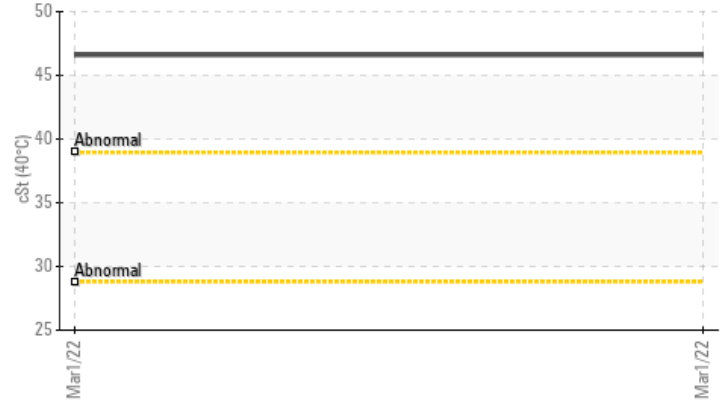

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	---	---
Particles >4µm	ASTM D7647	>5000	▲ <b>46903</b>	---	---
Particles >6µm	ASTM D7647	>1300	▲ <b>11659</b>	---	---
Particles >14µm	ASTM D7647	>160	▲ <b>1113</b>	---	---
Particles >21µm	ASTM D7647	>40	▲ <b>334</b>	---	---
Particles >38µm	ASTM D7647	>10	▲ <b>14</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>23/21/17</b>	---	---
Visc @ 40°C	cSt	ASTM D445	▲ <b>46.6</b>	---	---

Customer Id: GARGARIN  
 Sample No.: PCA0070727  
 Lab Number: 05486559  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)


To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

## HISTORICAL DIAGNOSIS

Machine Id  
**PUMP 4**  
Component  
**Hydraulic System**  
Fluid  
**MOBIL DTE ULTRA 32 (--- GAL)**

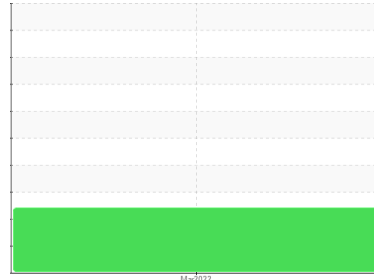

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

Viscosity of sample indicates oil is within ISO 46 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0070727</b>	---	---
Sample Date	Client Info			<b>01 Mar 2022</b>	---	---
Machine Age	hrs	Client Info		<b>6072</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	---	---





WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m		<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>75	<b>29</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Antimony	ppm	ASTM D5185m		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>4</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>61</b>	---	---
Calcium	ppm	ASTM D5185m		<b>119</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>399</b>	---	---
Zinc	ppm	ASTM D5185m		<b>540</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>983</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>▲ 46903</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 11659</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>▲ 1113</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>▲ 334</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>▲ 14</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 23/21/17</b>	---	---

# OIL ANALYSIS REPORT

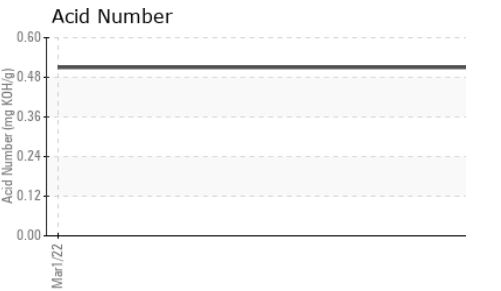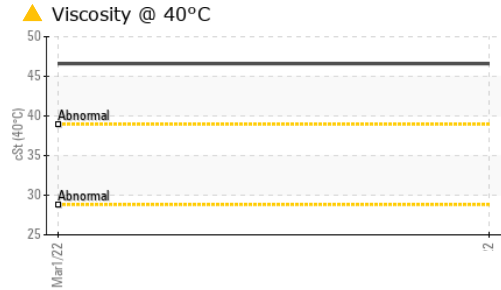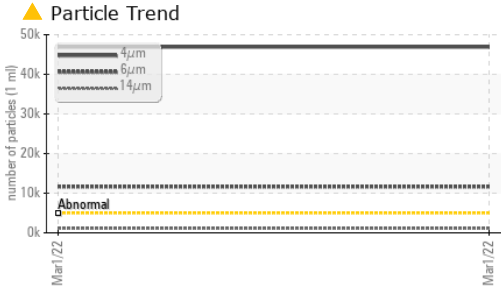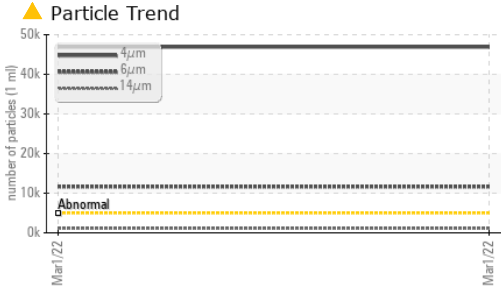

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.51</b>	---	---





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		<b>▲ 46.6</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

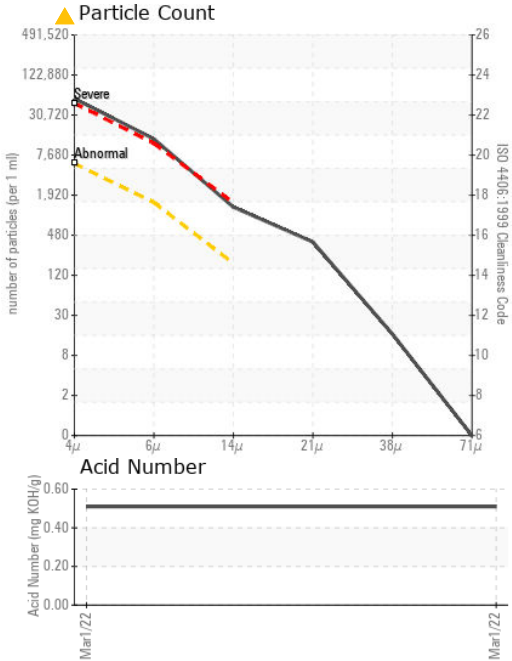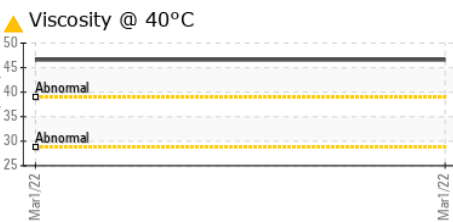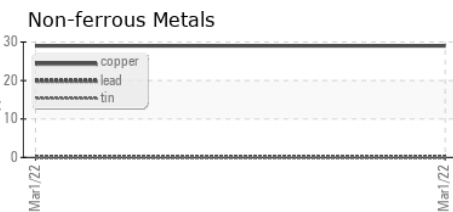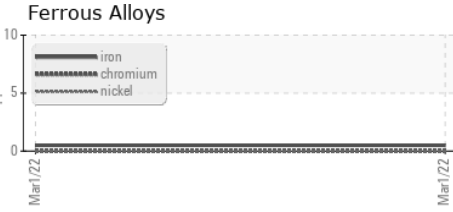

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0070727 **Received** : 08 Mar 2022  
**Lab Number** : 05486559 **Diagnosed** : 10 Mar 2022  
**Unique Number** : 9880778 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**GARY SANITATION**  
 GARY, IN  
 US  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: