

PROBLEM SUMMARY

Sample Rating Trend


ISO



Machine Id
MAX 8 (S/N 6342)


Component
Hydraulic System

Fluid
PETRO CANADA CALFLO AF (25 GAL)

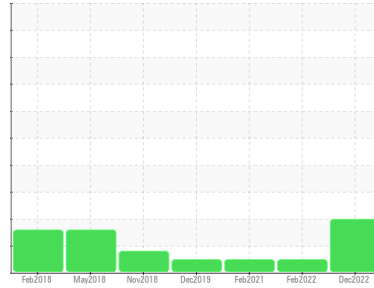

COMPONENT CONDITION SUMMARY

▲ Particle Trend

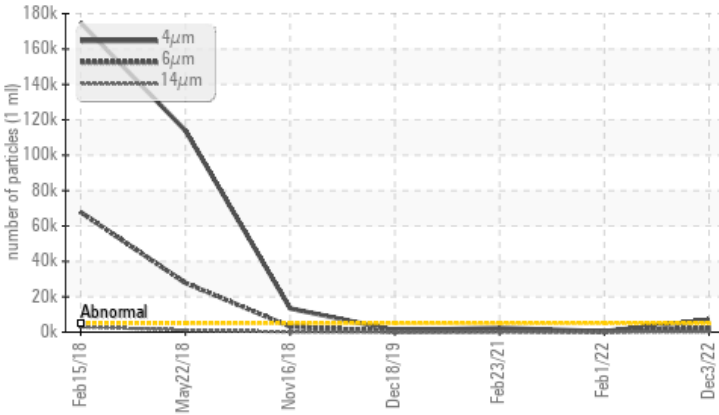

RECOMMENDATION

No corrective action is recommended at this time.
Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ASTM D7647	ATTENTION	NORMAL	NORMAL
Particles >4µm	>5000	▲ 6896	501	2332	
Particles >6µm	>1300	▲ 2419	179	649	
Particles >14µm	>160	▲ 228	26	71	
Particles >21µm	>40	▲ 68	10	23	
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 20/18/15	16/15/12	18/17/13	

Customer Id: GALGURIL
Sample No.: PCA0067938
Lab Number: 05710963
Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

01 Feb 2022 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



23 Feb 2021 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



18 Dec 2019 Diag: Doug Bogart

NORMAL




No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The oil viscosity is lower than typical, possibly indicating the addition of lighter grade oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

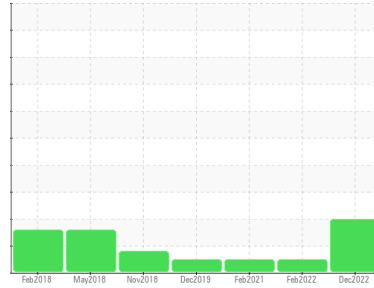

ISO



Machine Id
MAX 8 (S/N 6342)
 Component
Hydraulic System
 Fluid
PETRO CANADA CALFLO AF (25 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0067938	PCA0015044	PCA0015039
Sample Date	Client Info	03 Dec 2022	01 Feb 2022	23 Feb 2021
Machine Age	yrs Client Info	4	0	0
Oil Age	yrs Client Info	4	3	2
Oil Changed	Client Info	Not Chngd	Filtered	Filtered
Sample Status		ATTENTION	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<1	<1	0
Chromium	ppm ASTM D5185m >20	0	0	0
Nickel	ppm ASTM D5185m >20	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m	0	<1	0
Aluminum	ppm ASTM D5185m >20	0	0	0
Lead	ppm ASTM D5185m >20	0	0	<1
Copper	ppm ASTM D5185m >20	<1	0	0
Tin	ppm ASTM D5185m >20	0	0	0
Antimony	ppm ASTM D5185m	---	0	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	0	<1	<1
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 0	0	0	0
Manganese	ppm ASTM D5185m 0	0	0	0
Magnesium	ppm ASTM D5185m 0	0	0	0
Calcium	ppm ASTM D5185m 0	0	<1	4
Phosphorus	ppm ASTM D5185m 270	246	219	201
Zinc	ppm ASTM D5185m 0	0	0	0
Sulfur	ppm ASTM D5185m 10	18	<1	33

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	2	<1	<1
Sodium	ppm ASTM D5185m	<1	<1	0
Potassium	ppm ASTM D5185m >20	0	0	0

FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 6896	501	2332
Particles >6µm	ASTM D7647 >1300	▲ 2419	179	649
Particles >14µm	ASTM D7647 >160	▲ 228	26	71
Particles >21µm	ASTM D7647 >40	▲ 68	10	23
Particles >38µm	ASTM D7647 >10	3	0	0
Particles >71µm	ASTM D7647 >3	1	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 20/18/15	16/15/12	18/17/13

FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.03	0.39	0.43	0.509

OIL ANALYSIS REPORT


▲ Particle Trend

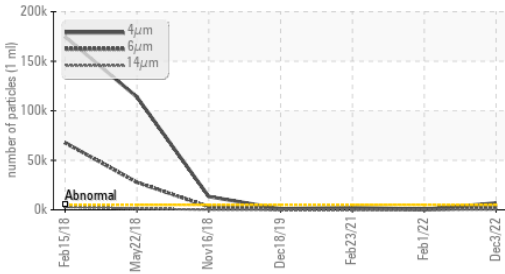


▲ Particle Trend

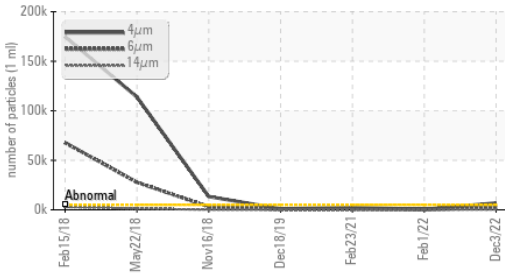

Acid Number

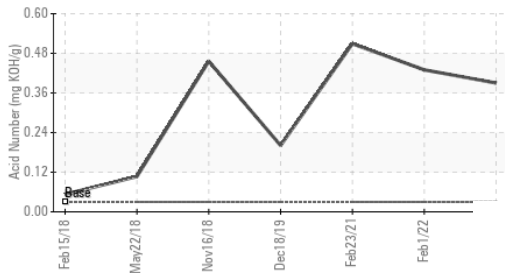


Viscosity @ 40°C

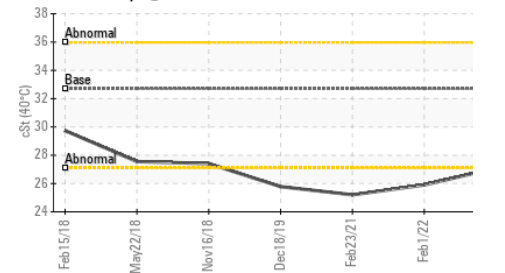

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32.7	27.1	25.9

SAMPLE IMAGES

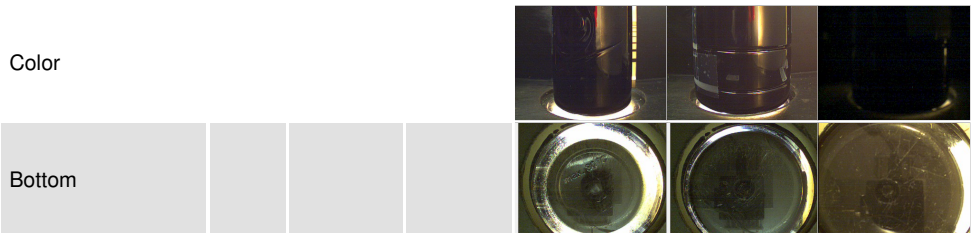


GRAPHS


Ferrous Alloys

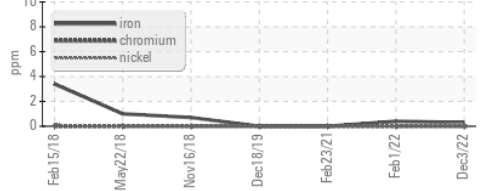


Non-ferrous Metals

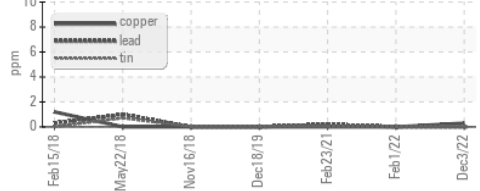


Viscosity @ 40°C

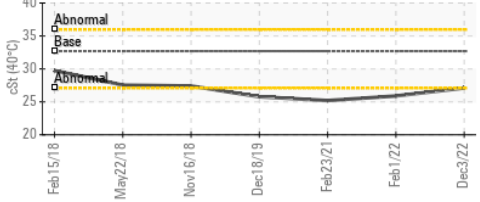

▲ Particle Count

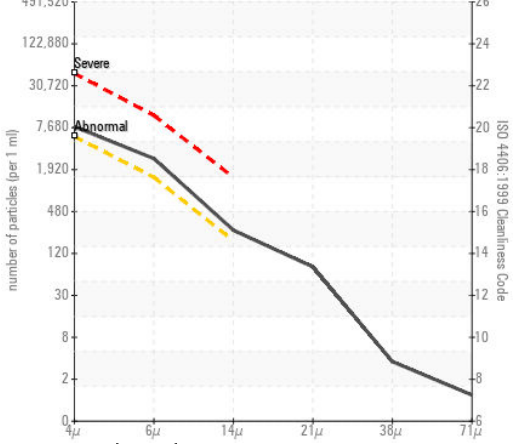

Acid Number

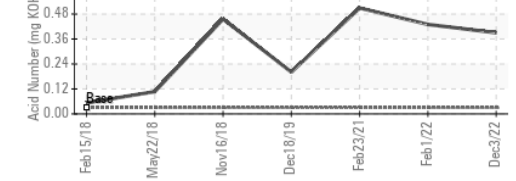

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0067938 **Received** : 07 Dec 2022
Lab Number : 05710963 **Diagnosed** : 09 Dec 2022
Unique Number : 10245538 **Diagnostician** : Don Baldrige
Test Package : PLANT

GALLAGHER CORPORATION
 3908 MORRISON DR
 GURNEE, IL
 US 60031
 Contact: BRAD CLIFF
 bcliff@gallaghercorp.com
 T: (847)249-3440
 F: (847)249-3473

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)