


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

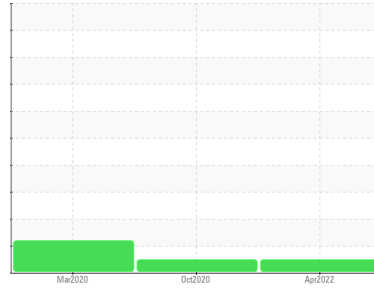

Machine Id
2026772
 Component
1 Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0068374	PCA0012050	PCA0012056
Sample Date	Client Info			15 Apr 2022	01 Oct 2020	18 Mar 2020
Machine Age	mls	Client Info		0	106151	20297
Oil Age	mls	Client Info		30000	30000	20297
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	52	46	36
Chromium	ppm	ASTM D5185m	>20	1	1	<1
Nickel	ppm	ASTM D5185m	>4	2	1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	1
Aluminum	ppm	ASTM D5185m	>20	5	17	45
Lead	ppm	ASTM D5185m	>40	4	1	2
Copper	ppm	ASTM D5185m	>330	10	47	255
Tin	ppm	ASTM D5185m	>15	1	<1	6
Antimony	ppm	ASTM D5185m		---	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	2	1	26
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	62	59	35
Manganese	ppm	ASTM D5185m		1	1	4
Magnesium	ppm	ASTM D5185m	450	951	986	452
Calcium	ppm	ASTM D5185m	3000	1183	1102	1525
Phosphorus	ppm	ASTM D5185m	1150	1013	886	796
Zinc	ppm	ASTM D5185m	1350	1323	1168	936
Sulfur	ppm	ASTM D5185m	4250	3313	1783	2610

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	11	6	36
Sodium	ppm	ASTM D5185m		11	9	6
Potassium	ppm	ASTM D5185m	>20	3	26	▲ 112

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7	0.9	0.4
Nitration	Abs/cm	*ASTM D7624	>20	11.9	12.3	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.3	24.7	23.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.2	21.5	21.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.6	5.8	8.8





OIL ANALYSIS REPORT

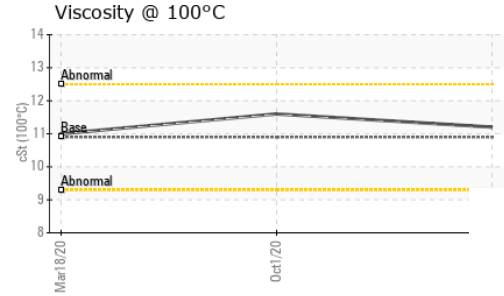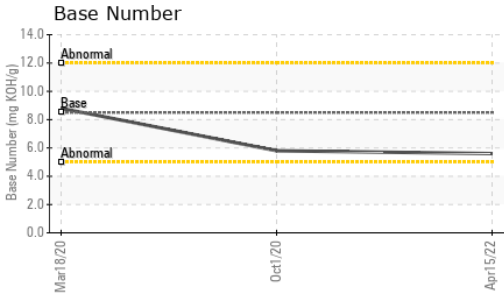

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	11.2	11.6	11.0

GRAPHS

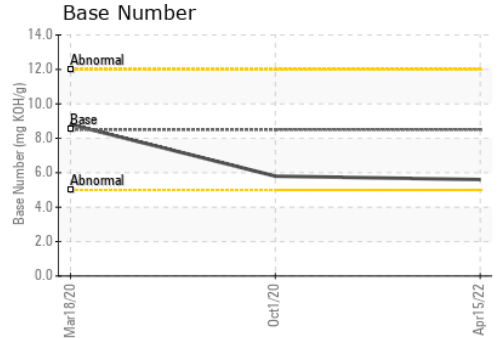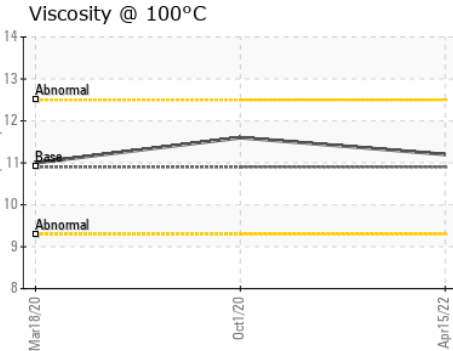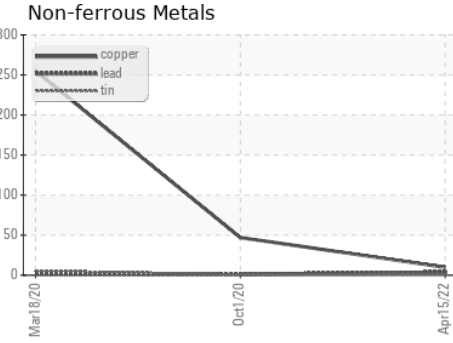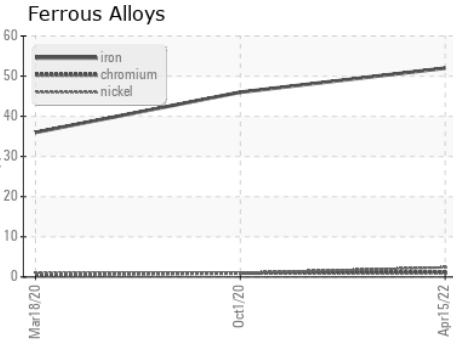

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0068374 **Received** : 31 Mar 2023
Lab Number : **05808134** **Diagnosed** : 04 Apr 2023
Unique Number : 10405663 **Diagnostician** : Doug Bogart
Test Package : FLEET

PERDUE FARMS INC - GARAGE
 189 PERDUE WAY
 CANDOR, NC
 US 27229
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: