


PROBLEM SUMMARY

Sample Rating Trend




VISCOSITY

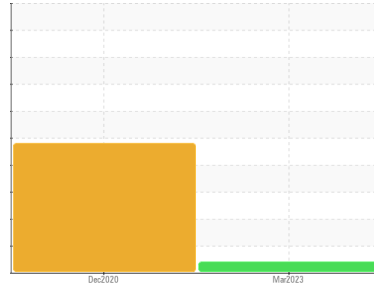

Machine Id
VOLVO 26551
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

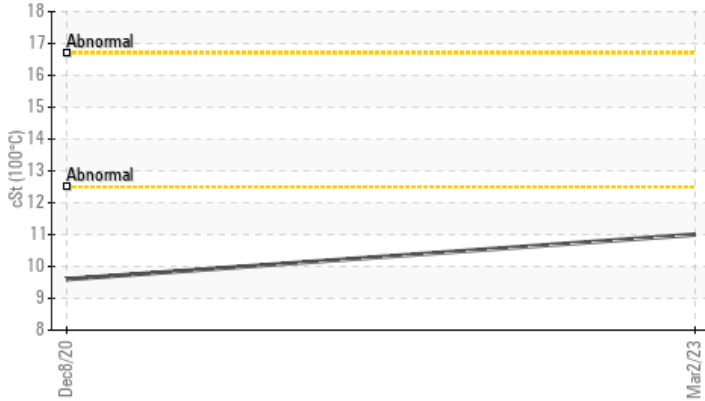

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	SEVERE	---
Visc @ 100°C	cSt	ASTM D445	▲ 11.0	▲ 9.6	---

Customer Id: PERCANN
 Sample No.: PCA0068373
 Lab Number: 05808155
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.

HISTORICAL DIAGNOSIS

08 Dec 2020 Diag: Jonathan Hester

FUEL




We advise that you check the fuel injection system. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. Please note that this is a corrected copy for laboratory data updates. All component wear rates are normal. There is a high amount of fuel present in the oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



Machine Id
VOLVO 26551
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

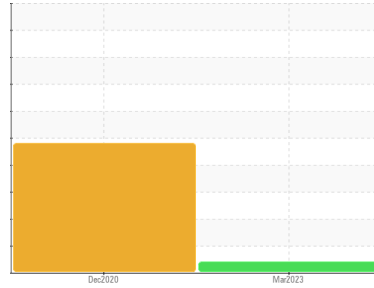

DIAGNOSIS

▲ Recommendation
 The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear
 All component wear rates are normal.

Contamination
 Fuel content negligible.

▲ Fluid Condition
 The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0068373	PCA05132859	---
Sample Date	Client Info		02 Mar 2023	08 Dec 2020	---
Machine Age	mls	Client Info	701325	0	---
Oil Age	mls	Client Info	30000	0	---
Oil Changed	Client Info		Changed	N/A	---
Sample Status			ABNORMAL	SEVERE	---

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	46	28	---
Chromium	ppm	ASTM D5185m >20	1	<1	---
Nickel	ppm	ASTM D5185m >2	2	1	---
Titanium	ppm	ASTM D5185m	0	<1	---
Silver	ppm	ASTM D5185m >2	<1	<1	---
Aluminum	ppm	ASTM D5185m >25	5	▲ 18	---
Lead	ppm	ASTM D5185m >40	<1	2	---
Copper	ppm	ASTM D5185m >330	10	3	---
Tin	ppm	ASTM D5185m >15	<1	0	---
Antimony	ppm	ASTM D5185m	---	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	7	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	64	53	---
Manganese	ppm	ASTM D5185m	1	<1	---
Magnesium	ppm	ASTM D5185m	948	878	---
Calcium	ppm	ASTM D5185m	1198	1003	---
Phosphorus	ppm	ASTM D5185m	1004	899	---
Zinc	ppm	ASTM D5185m	1325	1068	---
Sulfur	ppm	ASTM D5185m	3545	2073	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	▲ 37	---
Sodium	ppm	ASTM D5185m	9	8	---
Potassium	ppm	ASTM D5185m >20	3	0	---
Fuel	%	ASTM D3524 >5	0.6	◆ 11.3	---




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.1	0.5	---
Nitration	Abs/cm	*ASTM D7624 >20	12.9	10.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	25.5	24.2	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.1	20.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	5.7	6.5	---





OIL ANALYSIS REPORT

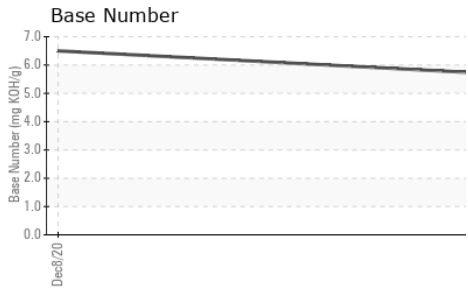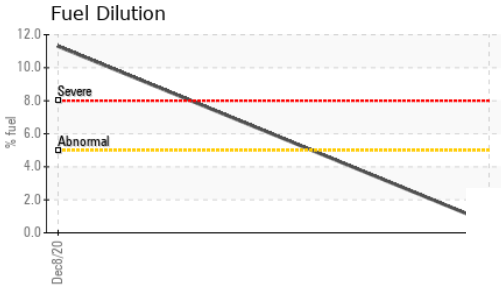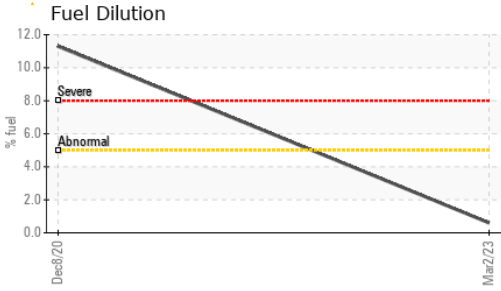

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 11.0	▲ 9.6	---

GRAPHS

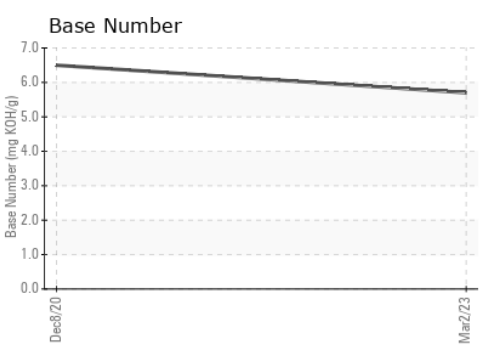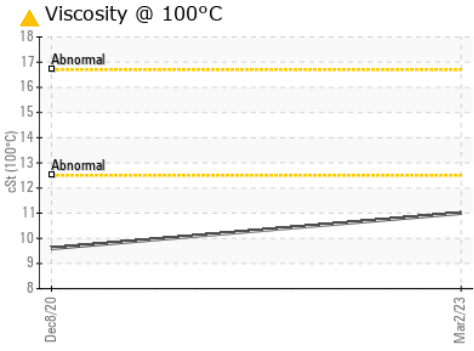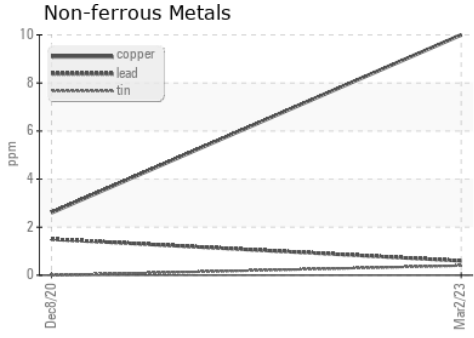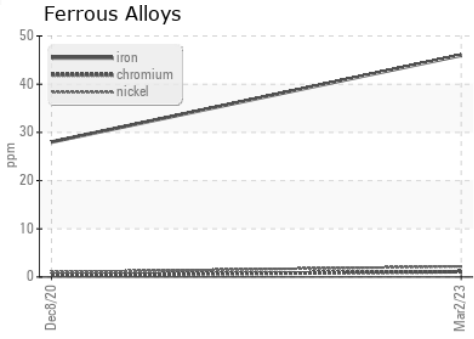

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0068373 **Received** : 31 Mar 2023
Lab Number : 05808155 **Diagnosed** : 10 Apr 2023
Unique Number : 10405684 **Diagnostician** : Angela Borella
Test Package : FLEET (Additional Tests: PercentFuel)

PERDUE FARMS INC - GARAGE
 189 PERDUE WAY
 CANDOR, NC
 US 27229
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: