OIL DIAGNOSTICS

OIL ANALYSIS REPORT

Sample Rating Trend

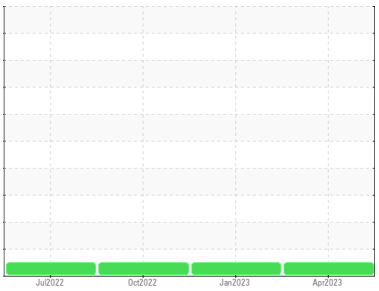

NORMAL

Machine Id
437
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear
All component wear rates are normal.

Contamination
Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PCA0069346**	PCA0069416	PCA0069317
Sample Date		Client Info		**07 Apr 2023**	20 Jan 2023	07 Oct 2022
Machine Age	mls	Client Info		**177172**	137035	134898
Oil Age	mls	Client Info		**20137**	22137	20697
Oil Changed		Client Info		**Changed**	Changed	Changed
Sample Status				**NORMAL**	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel		WC Method	>5	**<1.0**	<1.0	<1.0
Water		WC Method	>0.2	**NEG**	NEG	NEG
Glycol		WC Method		**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	**11**	12	14
Chromium	ppm	ASTM D5185m	>20	**<1**	<1	<1
Nickel	ppm	ASTM D5185m	>4	**0**	0	0
Titanium	ppm	ASTM D5185m		**0**	0	0
Silver	ppm	ASTM D5185m	>3	**0**	0	0
Aluminum	ppm	ASTM D5185m	>20	**6**	6	5
Lead	ppm	ASTM D5185m	>40	**0**	0	<1
Copper	ppm	ASTM D5185m	>330	**<1**	<1	1
Tin	ppm	ASTM D5185m	>15	**0**	0	<1
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	**4**	2	2
Barium	ppm	ASTM D5185m	10	**0**	0	0
Molybdenum	ppm	ASTM D5185m	100	**59**	61	59
Manganese	ppm	ASTM D5185m		**<1**	<1	<1
Magnesium	ppm	ASTM D5185m	450	**932**	954	960
Calcium	ppm	ASTM D5185m	3000	**1057**	1076	1062
Phosphorus	ppm	ASTM D5185m	1150	**1005**	1012	973
Zinc	ppm	ASTM D5185m	1350	**1210**	1224	1226
Sulfur	ppm	ASTM D5185m	4250	**3552**	3571	3124

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	**5**	6	7
Sodium	ppm	ASTM D5185m	>158	**1**	1	<1
Potassium	ppm	ASTM D5185m	>20	**12**	11	14

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	**0.5**	0.5	0.6
Nitration	Abs/cm	*ASTM D7624	>20	**8.7**	8.8	10.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	**19.0**	19.4	21.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	**15.7**	16.1	18.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	**7.8**	7.9	8.9

OIL ANALYSIS REPORT

FT-IR (Direct Trend)

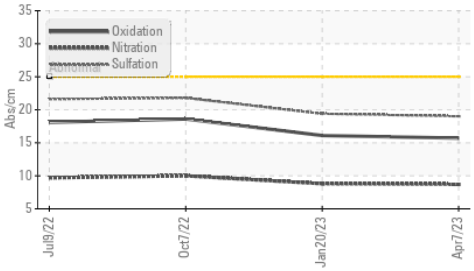

Base Number

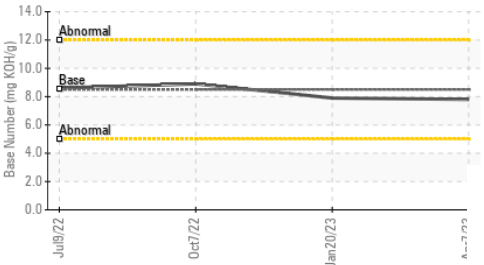

Viscosity @ 100°C

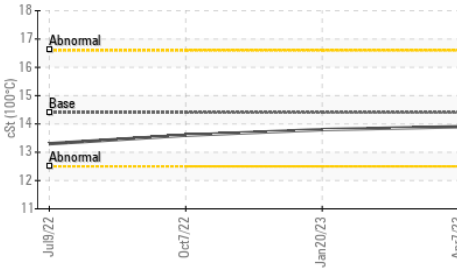

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	**13.9**	13.8	13.6

GRAPHS

Ferrous Alloys

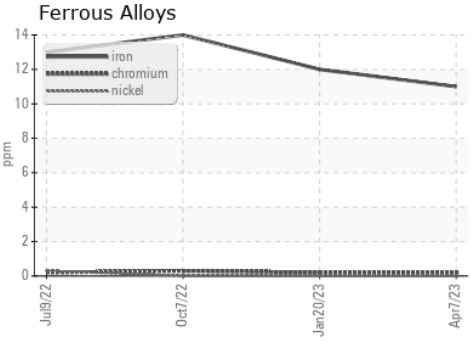

Non-ferrous Metals

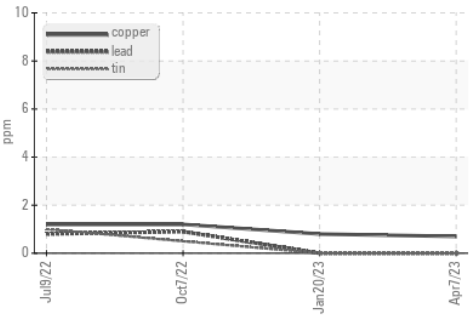

Viscosity @ 100°C

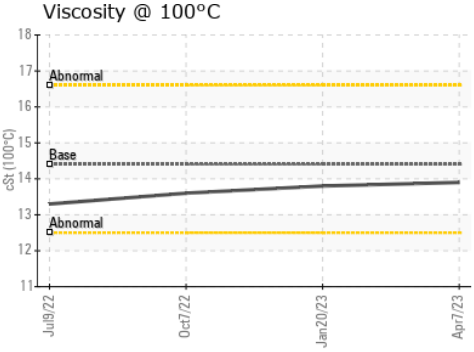

Base Number

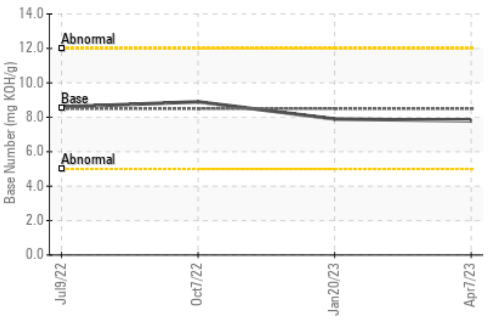

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0069346
Lab Number : 05829433
Unique Number : 10442926
Test Package : FLEET

Received : 25 Apr 2023
Tested : 26 Apr 2023
Diagnosed : 26 Apr 2023 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LEFEBVRE AND SONS
10895 171ST AVE NW
ELK RIVER, MN
US 55330
Contact: JAY LEFEBVRE
jay.lefebvre@leftruck.com
T:
F: