




# OIL ANALYSIS REPORT

Sample Rating Trend

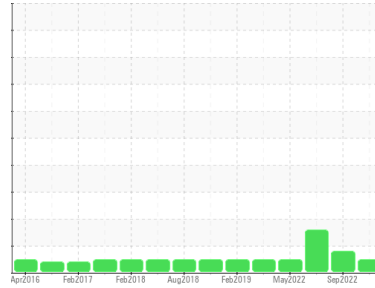

**NORMAL**



Machine Id

**2562**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (36 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>GFL0070484</b>	GFL0058546	GFL0058552
Sample Date	Client Info		<b>09 May 2023</b>	28 Sep 2022	12 Sep 2022
Machine Age	hrs	Client Info	<b>33222</b>	33222	32962
Oil Age	hrs	Client Info	<b>33222</b>	260	590
Oil Changed	Client Info		<b>N/A</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	▲ 2.3
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >120	<b>6</b>	19	17
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	2	2
Copper	ppm	ASTM D5185m >330	<b>2</b>	7	7
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	<b>4</b>	13	8
Barium	ppm	ASTM D5185m 0	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	62	56
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>897</b>	891	846
Calcium	ppm	ASTM D5185m 1070	<b>1103</b>	1142	1026
Phosphorus	ppm	ASTM D5185m 1150	<b>1007</b>	1027	915
Zinc	ppm	ASTM D5185m 1270	<b>1181</b>	1219	1155
Sulfur	ppm	ASTM D5185m 2060	<b>3163</b>	3595	2773

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	2
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	0

## INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >4	<b>2.1</b>	▲ 4.9	▲ 5
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.5</b>	11.9	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.9</b>	28.8	28.7

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.2</b>	16.2	16.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	5.2	4.1







# OIL ANALYSIS REPORT

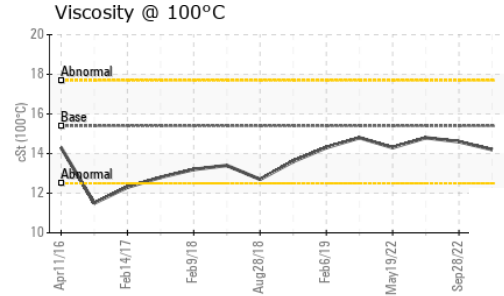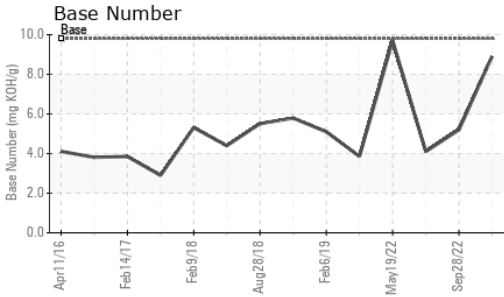

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.6	14.8

## GRAPHS

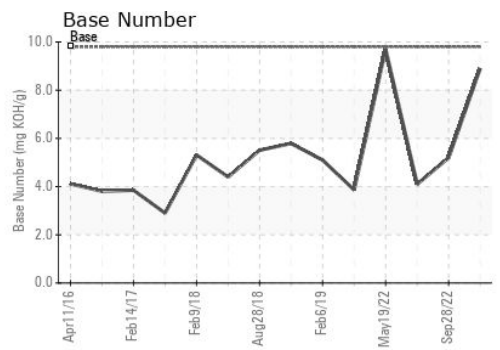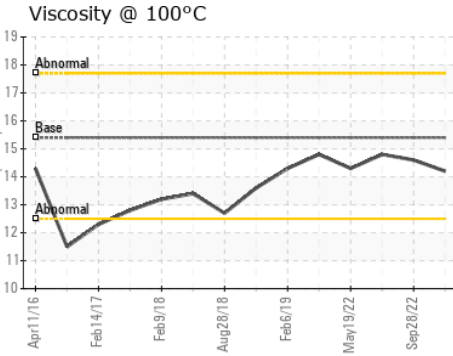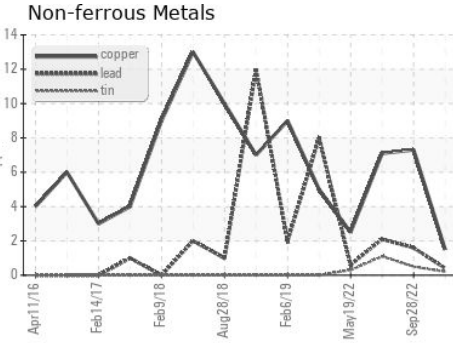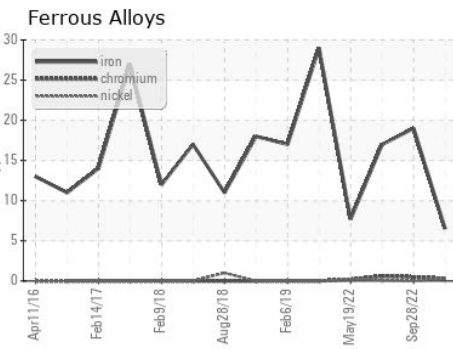

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0070484 **Received** : 15 May 2023  
**Lab Number** : **05846842** **Diagnosed** : 16 May 2023  
**Unique Number** : 10470949 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 19DR - Deep Run/TriEast**  
 2287 Leslie R Stroud Road  
 Kinston, NC  
 US 28504-9477  
 Contact: Spencer Ligon  
 spencer.ligon@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)