




OIL ANALYSIS REPORT

Sample Rating Trend

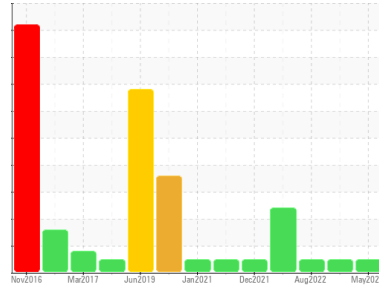

NORMAL



Machine Id
3723

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0070489	GFL0070497	GFL0049657
Sample Date	Client Info	09 May 2023	12 Jan 2023	19 Aug 2022
Machine Age	hrs	23340	23340	22734
Oil Age	hrs	23340	606	619
Oil Changed	Client Info	N/A	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >75	27	4	13
Chromium	ppm ASTM D5185m >5	<1	<1	1
Nickel	ppm ASTM D5185m >4	<1	<1	0
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >15	2	<1	<1
Lead	ppm ASTM D5185m >25	6	0	<1
Copper	ppm ASTM D5185m >100	2	0	<1
Tin	ppm ASTM D5185m >4	<1	0	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	4	7	13
Barium	ppm ASTM D5185m 0	2	1	0
Molybdenum	ppm ASTM D5185m 60	66	57	58
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	944	854	822
Calcium	ppm ASTM D5185m 1070	1200	1013	1013
Phosphorus	ppm ASTM D5185m 1150	1047	934	875
Zinc	ppm ASTM D5185m 1270	1234	1115	1085
Sulfur	ppm ASTM D5185m 2060	2811	3014	2806

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	4	4	5
Sodium	ppm ASTM D5185m	9	6	44
Potassium	ppm ASTM D5185m >20	3	<1	10

INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >6	0.5	0.2	0.4
Nitration	Abs/cm *ASTM D7624 >20	8.6	6.3	8.6
Sulfation	Abs/.1mm *ASTM D7415 >30	21.3	17.9	20.5

FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.3	13.7	15.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.3	9.0	9.5







OIL ANALYSIS REPORT

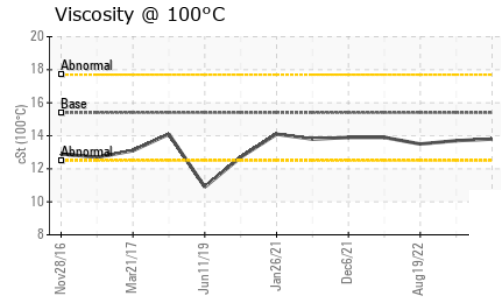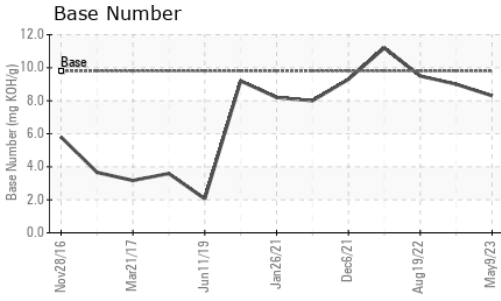

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.7	13.5

GRAPHS

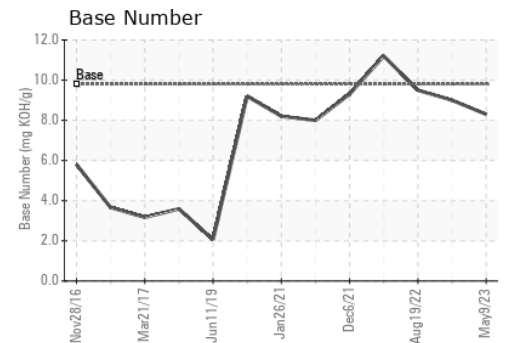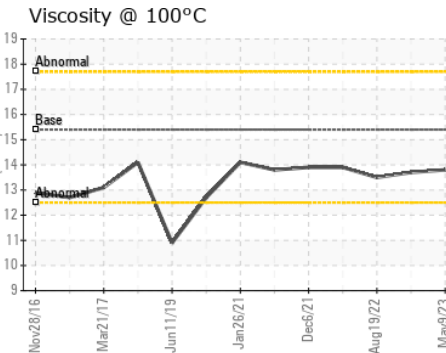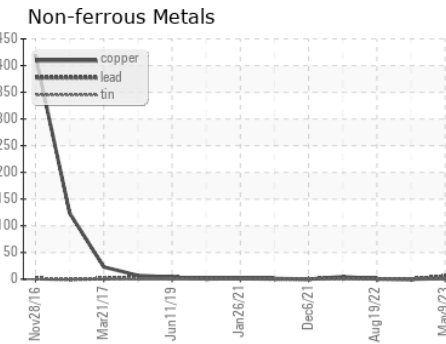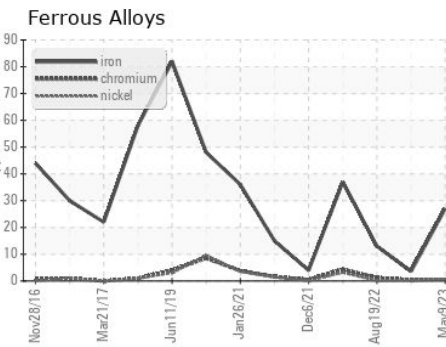

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0070489
 Lab Number : 05846844
 Unique Number : 10470951
 Test Package : FLEET

GFL Environmental - 19DR - Deep Run/TriEast
 2287 Leslie R Stroud Road
 Kinston, NC
 US 28504-9477
 Contact: Spencer Ligon
 spencer.ligon@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)