




# PROBLEM SUMMARY

Sample Rating Trend

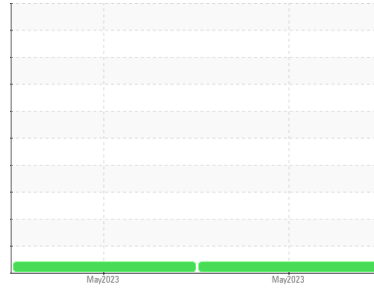


VISCOSITY



Machine Id  
**713027**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

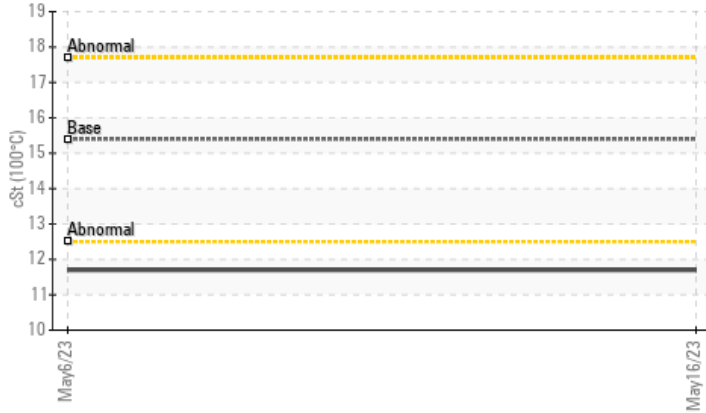

## RECOMMENDATION

Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	ATTENTION	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.7	▲ 11.7	---

Customer Id: GFL821  
 Sample No.: GFL0076844  
 Lab Number: 05849381  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

**06 May 2023 Diag: Angela Borella**

### VISCOSITY



Resample at the next service interval to monitor. All component wear rates are normal. Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

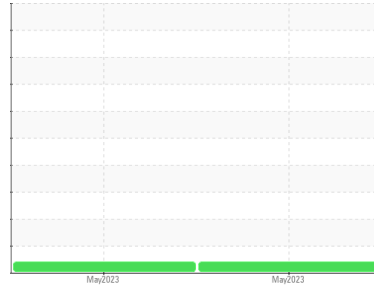

VISCOSITY



Machine Id  
**713027**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0076844</b>	GFL0076820	---
Sample Date	Client Info	<b>16 May 2023</b>	06 May 2023	---
Machine Age	hrs	Client Info	<b>139</b>	157
Oil Age	hrs	Client Info	<b>139</b>	157
Oil Changed	Client Info	<b>N/A</b>	Not Changd	---
Sample Status			<b>ATTENTION</b>	ATTENTION

## CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>15</b>	15
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1
Copper	ppm	ASTM D5185m >330	<b>14</b>	13
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>49</b>	42
Barium	ppm	ASTM D5185m 0	<b>0</b>	1
Molybdenum	ppm	ASTM D5185m 60	<b>48</b>	43
Manganese	ppm	ASTM D5185m 0	<b>4</b>	5
Magnesium	ppm	ASTM D5185m 1010	<b>836</b>	845
Calcium	ppm	ASTM D5185m 1070	<b>1246</b>	1202
Phosphorus	ppm	ASTM D5185m 1150	<b>726</b>	752
Zinc	ppm	ASTM D5185m 1270	<b>889</b>	921
Sulfur	ppm	ASTM D5185m 2060	<b>2561</b>	2908

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	12
Sodium	ppm	ASTM D5185m	<b>9</b>	5
Potassium	ppm	ASTM D5185m >20	<b>3</b>	3
Fuel	%	ASTM D3524 >5	<b>0.8</b>	0.7

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.6</b>	9.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	21.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.3</b>	19.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.1</b>	9.3







# OIL ANALYSIS REPORT

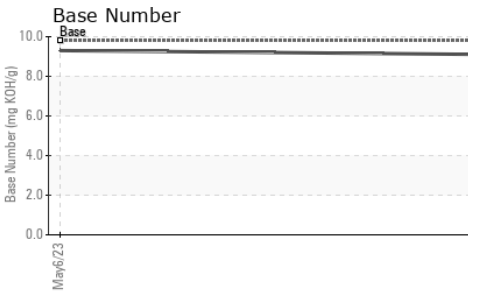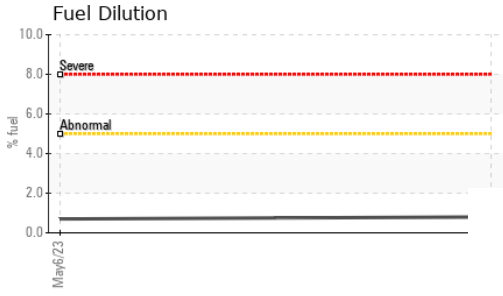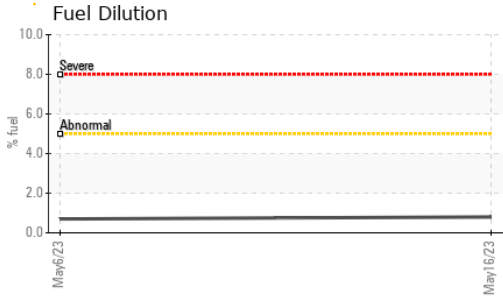

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.7	▲ 11.7

## GRAPHS

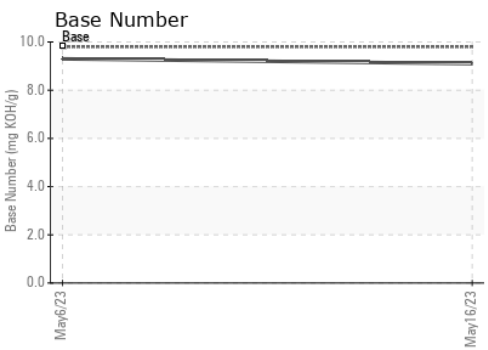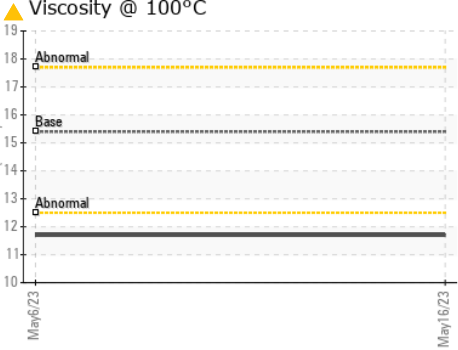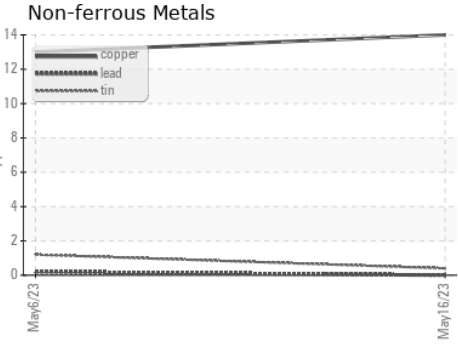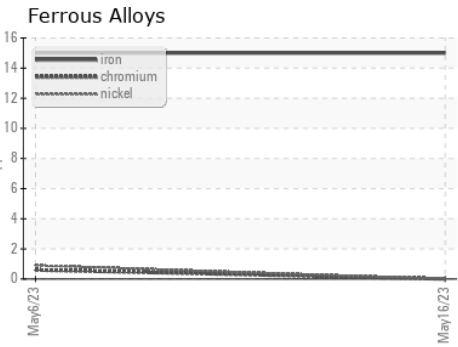

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0076844 **Received** : 17 May 2023  
**Lab Number** : 05849381 **Diagnosed** : 18 May 2023  
**Unique Number** : 10473488 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 821 - Ozarks Hauling**  
 33924 Olath Drive  
 Lebanon, MO  
 US 65536  
 Contact: Landen Johnson  
 landen.johnson@gflenv.com  
 T: (417)664-0010  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)