




PROBLEM SUMMARY

Sample Rating Trend

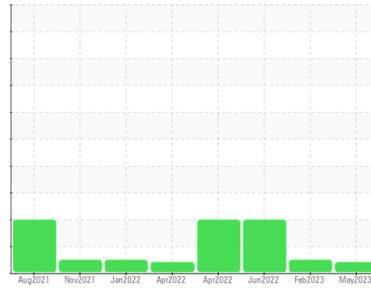


VISCOSITY



Area
Sawmill/Gang
 Machine Id
[Sawmill^Gang] High & Low Speed
 Component
Bearing
 Fluid
PETRO CANADA PETROGLIDE 100 (175 GAL)

COMPONENT CONDITION SUMMARY

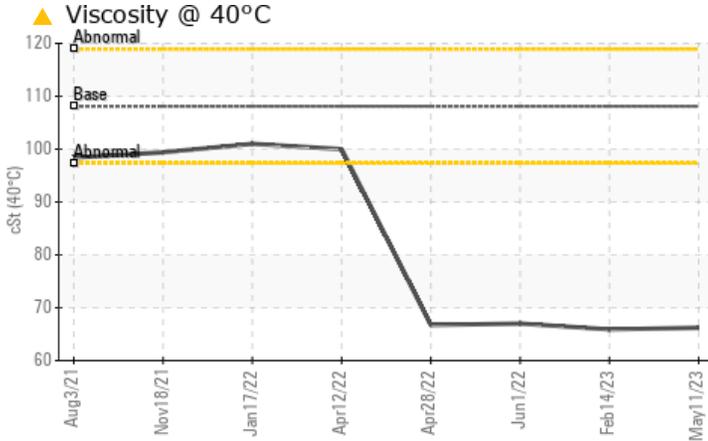

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	NORMAL	ATTENTION
Visc @ 40°C	cSt	ASTM D445	108.1	▲ 66.2	65.9	▲ 67.0

Customer Id: WESRIE
 Sample No.: PCA0079468
 Lab Number: 05849650
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

14 Feb 2023 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



01 Jun 2022 Diag: Don Baldrige

VISCOSITY



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. Additive levels indicate the addition of a different brand, or type of oil. Viscosity of sample indicates oil is within ISO 68 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

view report



28 Apr 2022 Diag: Jonathan Hester

VISCOSITY




No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. Additive levels indicate the addition of a different brand, or type of oil. Viscosity of sample indicates oil is within ISO 68 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

view report



OIL ANALYSIS REPORT

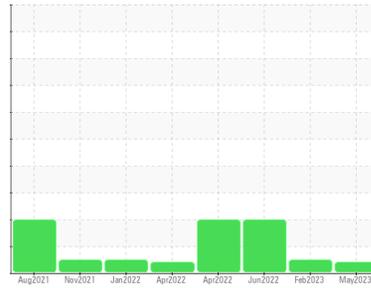Sample Rating Trend

VISCOSITY


Area
Sawmill/Gang
 Machine Id
[Sawmill^Gang] High & Low Speed
 Component
Bearing
 Fluid
PETRO CANADA PETROGLIDE 100 (175 GAL)

DIAGNOSIS
Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

Viscosity of sample indicates oil is within ISO 68 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0079468	PCA0079451	PCA0068764
Sample Date	Client Info	11 May 2023	14 Feb 2023	01 Jun 2022
Machine Age	mths	Client Info	1	1
Oil Age	mths	Client Info	0	0
Oil Changed	Client Info	Not Chngd	Not Chngd	N/A
Sample Status		ATTENTION	NORMAL	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	0	0	0
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	<1
Aluminum	ppm	ASTM D5185m >20	1	0	0
Lead	ppm	ASTM D5185m >20	0	0	0
Copper	ppm	ASTM D5185m >20	0	0	0
Tin	ppm	ASTM D5185m >20	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	▲ 0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m	0	0	0
Calcium	ppm	ASTM D5185m	53	49	▲ 49
Phosphorus	ppm	ASTM D5185m	350	314	327
Zinc	ppm	ASTM D5185m	424	395	▲ 406
Sulfur	ppm	ASTM D5185m 2500	665	687	▲ 1004

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<1	2	<1
Sodium	ppm	ASTM D5185m	0	<1	0
Potassium	ppm	ASTM D5185m >20	0	0	0
Water	%	ASTM D6304 >2	0.006	0.006	0.004
ppm Water	ppm	ASTM D6304	60.2	65.0	47.6






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	2551	1796	1905
Particles >6µm	ASTM D7647 >2500	633	477	386
Particles >14µm	ASTM D7647 >160	43	23	29
Particles >21µm	ASTM D7647 >40	14	5	9
Particles >38µm	ASTM D7647 >10	0	1	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >20/18/14	19/16/13	18/16/12	18/16/12

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 .2	0.39	0.41	0.46


OIL ANALYSIS REPORT

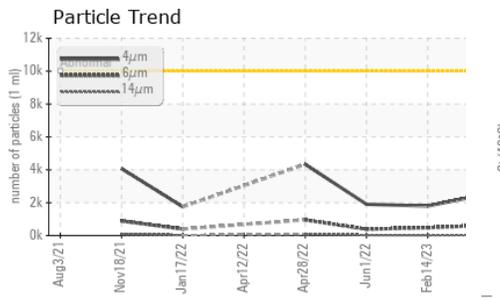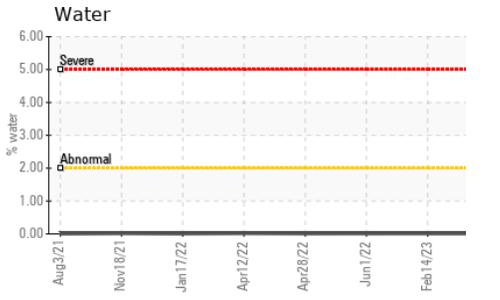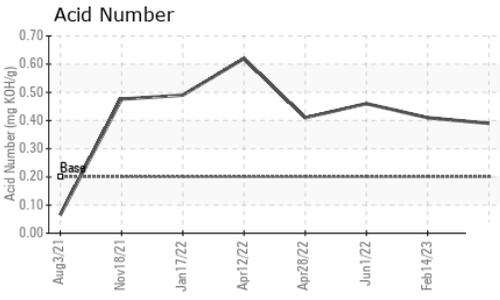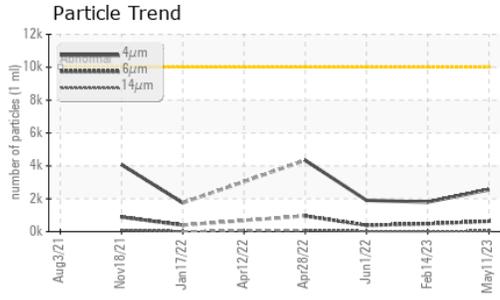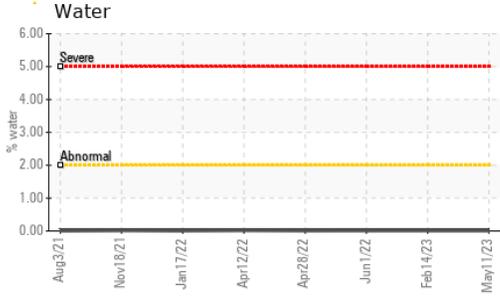





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	108.1 ▲ 66.2	65.9	▲ 67.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

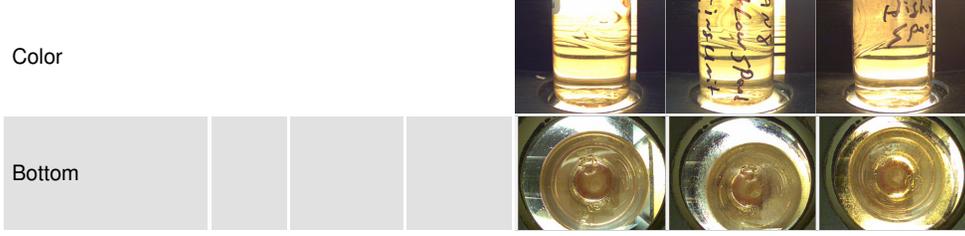

GRAPHS

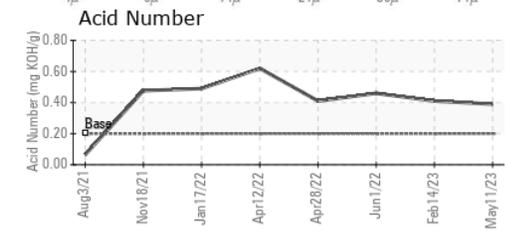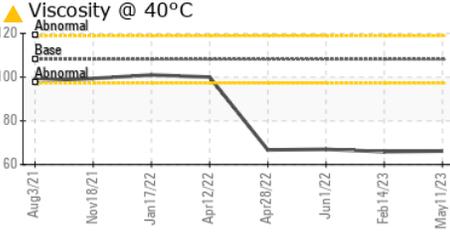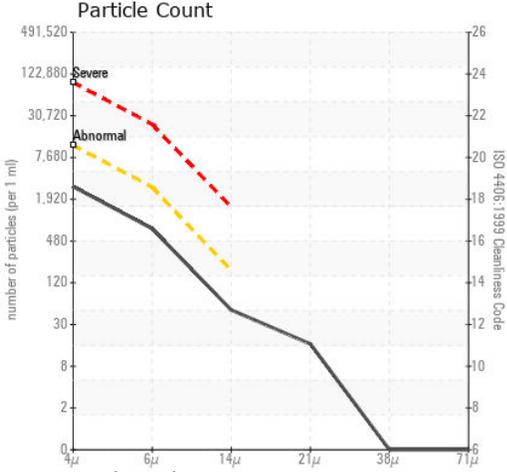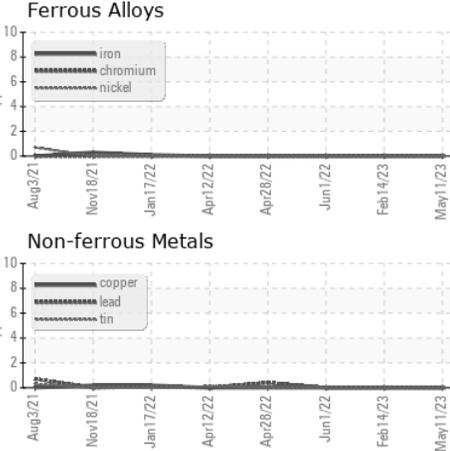

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0079468 **Received** : 17 May 2023
Lab Number : 05849650 **Diagnosed** : 19 May 2023
Unique Number : 10473757 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

West Fraser Inc. - Armour Lumber Mill
 361 Federal Road, PO Box 57
 Riegelwood, NC
 US 28456
 Contact: Juan Navarro
 Juan.Navarro@westfraser.com
 T:
 F: (910)655-9368

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)