




OIL ANALYSIS REPORT

Sample Rating Trend

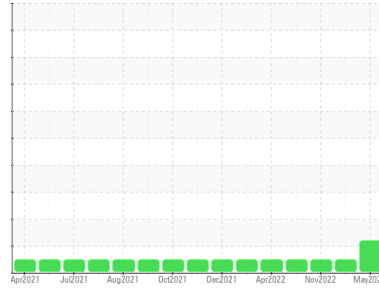

FUEL



Area
(H117647)

Machine Id
411033

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (48 QTS)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0073270	GFL0045918	GFL0045939
Sample Date	Client Info		19 May 2023	03 Jan 2023	23 Nov 2022
Machine Age	hrs	Client Info	600	600	600
Oil Age	hrs	Client Info	600	600	600
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	64	14	6
Chromium	ppm	ASTM D5185m >20	5	1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	0
Titanium	ppm	ASTM D5185m >2	<1	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	12	5	2
Lead	ppm	ASTM D5185m >40	<1	0	0
Copper	ppm	ASTM D5185m >330	20	<1	<1
Tin	ppm	ASTM D5185m >15	1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	15	14	27
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	71	58	57
Manganese	ppm	ASTM D5185m 0	1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	815	831	834
Calcium	ppm	ASTM D5185m 1070	1202	1174	1120
Phosphorus	ppm	ASTM D5185m 1150	944	953	944
Zinc	ppm	ASTM D5185m 1270	1185	1152	1134
Sulfur	ppm	ASTM D5185m 2060	3356	3269	3446

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	18	4	2
Sodium	ppm	ASTM D5185m	16	4	1
Potassium	ppm	ASTM D5185m >20	13	10	0
Fuel	%	ASTM D3524 >3.0	▲ 3.3	<1.0	<1.0

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	1.7	1.4	0.9
Nitration	Abs/cm	*ASTM D7624 >20	10.9	8.7	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.1	20.7	21.1


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.9	14.4	14.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.3	8.8	9.6




OIL ANALYSIS REPORT


▲ Fuel Dilution

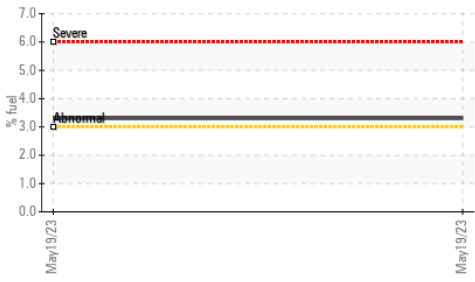

▲ Viscosity @ 100°C

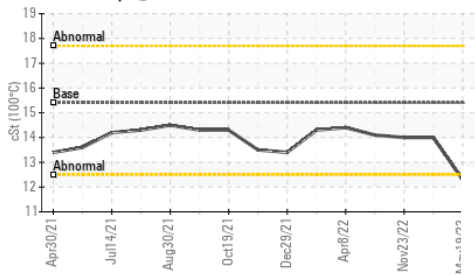

Base Number

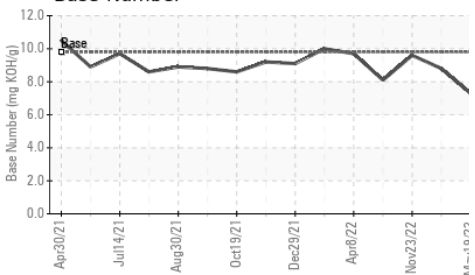


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 12.3	14.0	14.0

GRAPHS


Ferrous Alloys

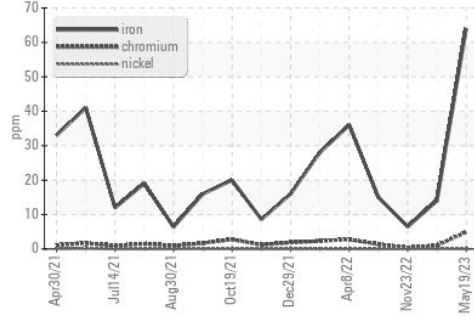


Non-ferrous Metals

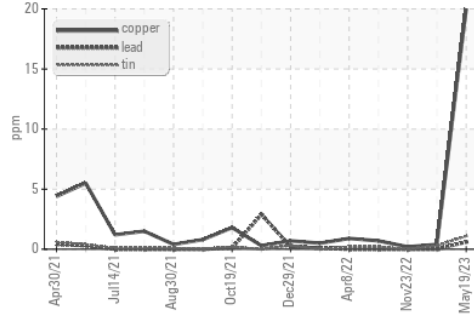

▲ Viscosity @ 100°C

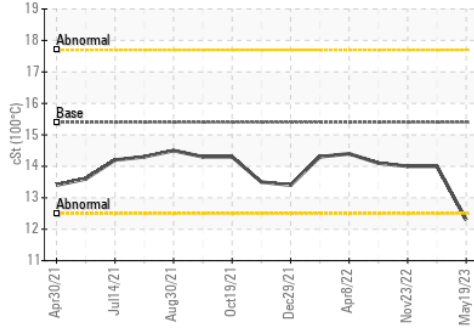

Base Number

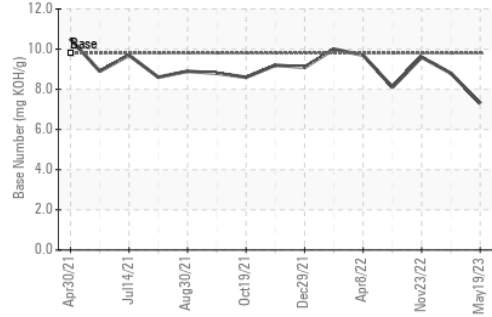

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0073270 **Received** : 24 May 2023
Lab Number : 05855371 **Tested** : 25 May 2023
Unique Number : 10484726 **Diagnosed** : 25 May 2023 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 102 - Morristown TN
 415 Ryder Lane, PO Box 1894
 Morristown, TN
 US 37813
 Contact: Ricky Dunlap
 ricky.dunlap@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)