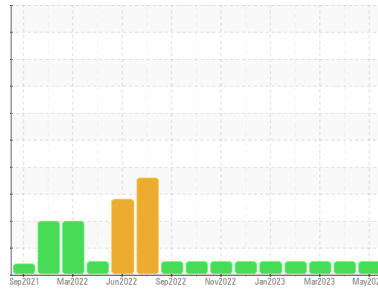


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR BASIN DRILLING 103
 Component
4 Diesel Engine
 Fluid
CHEVRON URSA SUPER PLUS EC 15W40 (--- GAL)

Sample Rating Trend



NORMAL

✓

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0096203	PCA0096220	PCA0093189
Sample Date	Client Info	25 May 2023	26 Apr 2023	27 Mar 2023
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	13	11	6
Chromium	ppm ASTM D5185m >20	0	<1	<1
Nickel	ppm ASTM D5185m >2	0	0	0
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >25	<1	0	1
Lead	ppm ASTM D5185m >40	3	2	1
Copper	ppm ASTM D5185m >330	7	6	6
Tin	ppm ASTM D5185m >15	<1	<1	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	120	166	273
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	94	88	92
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m	398	393	417
Calcium	ppm ASTM D5185m	1423	1291	1437
Phosphorus	ppm ASTM D5185m 1200	966	934	962
Zinc	ppm ASTM D5185m 1300	1208	1172	1229
Sulfur	ppm ASTM D5185m	2691	2824	3423

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	23	5	5
Sodium	ppm ASTM D5185m	3	5	3
Potassium	ppm ASTM D5185m >20	5	4	2

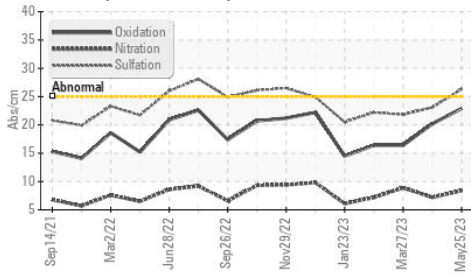
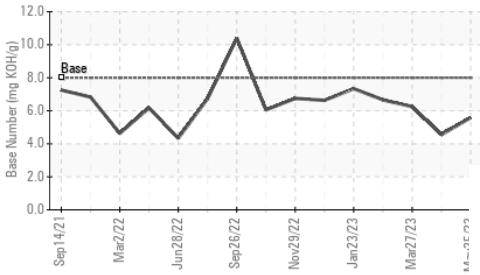
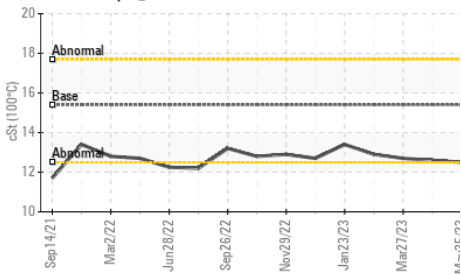
INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	8.4	7.2	8.9
Sulfation	Abs/.1mm *ASTM D7415 >30	26.3	23.1	21.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	22.9	20.2	16.4
Base Number (BN)	mg KOH/g ASTM D2896 8.0	5.58	4.55	6.25

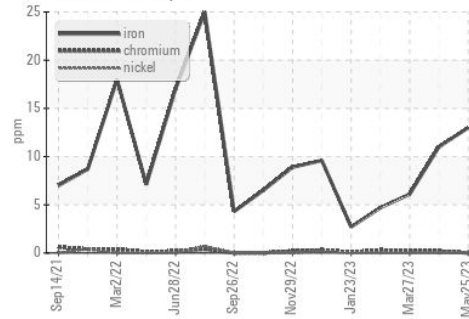
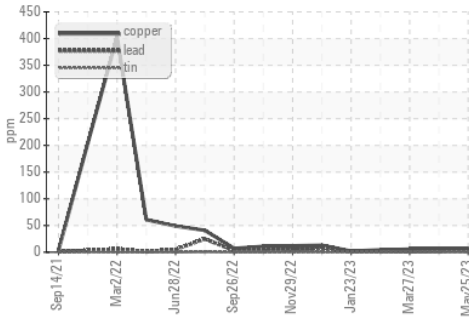
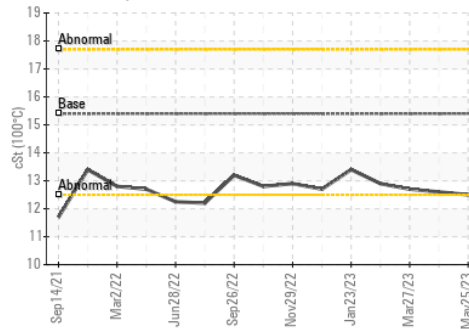
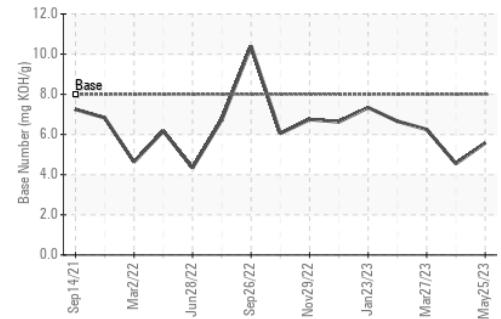
OIL ANALYSIS REPORT

FT-IR (Direct Trend)

Base Number

Viscosity @ 100°C


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.5	12.6	12.7

GRAPHS

Ferrous Alloys

Non-ferrous Metals

Viscosity @ 100°C

Base Number


Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0096203 **Received** : 05 Jun 2023
Lab Number : **05864520** **Tested** : 06 Jun 2023
Unique Number : 10498985 **Diagnosed** : 06 Jun 2023 - Wes Davis
Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DELTA FUEL COMPANY
 1000 WELLS ISLAND RD
 SHREVEPORT, LA
 US 71107
 Contact: BRAD GORDON
 bgordon@deltafuel.com
 T: (318)780-3921
 F: