

# PROBLEM SUMMARY

Sample Rating Trend




ISO



Machine Id  
**EXIT**  
Component  
**Hydraulic System**  
Fluid  
**MDI AW 46 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

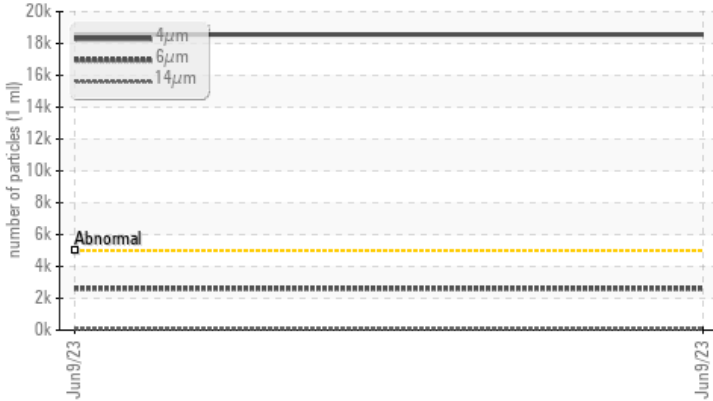

## RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	---	---
Particles >4µm	ASTM D7647	>5000	▲ <b>18558</b>	---	---
Particles >6µm	ASTM D7647	>1300	▲ <b>2617</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>21/19/14</b>	---	---

Customer Id: NATEAS  
Sample No.: PCA0100287  
Lab Number: 05872654  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## HISTORICAL DIAGNOSIS

# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**EXIT**  
 Component  
**Hydraulic System**  
 Fluid  
**MDI AW 46 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0100287</b>	---	---
Sample Date	Client Info	<b>09 Jun 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	<b>2</b>	---	---
Chromium ppm ASTM D5185m	>20	<b>0</b>	---	---
Nickel ppm ASTM D5185m	>20	<b>0</b>	---	---
Titanium ppm ASTM D5185m		<b>0</b>	---	---
Silver ppm ASTM D5185m		<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>20	<b>0</b>	---	---
Lead ppm ASTM D5185m	>20	<b>0</b>	---	---
Copper ppm ASTM D5185m	>20	<b>8</b>	---	---
Tin ppm ASTM D5185m	>20	<b>0</b>	---	---
Vanadium ppm ASTM D5185m		<b>0</b>	---	---
Cadmium ppm ASTM D5185m		<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>10</b>	---	---
Barium ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum ppm ASTM D5185m		<b>9</b>	---	---
Manganese ppm ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium ppm ASTM D5185m		<b>48</b>	---	---
Calcium ppm ASTM D5185m		<b>167</b>	---	---
Phosphorus ppm ASTM D5185m		<b>391</b>	---	---
Zinc ppm ASTM D5185m		<b>504</b>	---	---
Sulfur ppm ASTM D5185m		<b>3168</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	<b>1</b>	---	---
Sodium ppm ASTM D5185m		<b>2</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>30</b>	---	---

## FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	▲ <b>18558</b>	---	---
Particles >6µm ASTM D7647	>1300	▲ <b>2617</b>	---	---
Particles >14µm ASTM D7647	>160	<b>92</b>	---	---
Particles >21µm ASTM D7647	>40	<b>21</b>	---	---
Particles >38µm ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	▲ <b>21/19/14</b>	---	---

## FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>0.45</b>	---	---

# OIL ANALYSIS REPORT


### Particle Trend

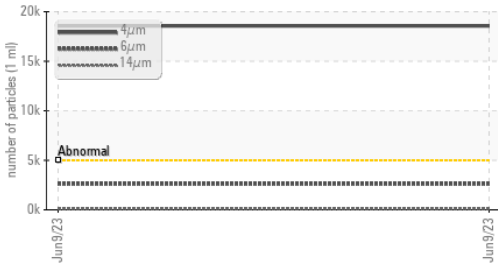


### Particle Trend

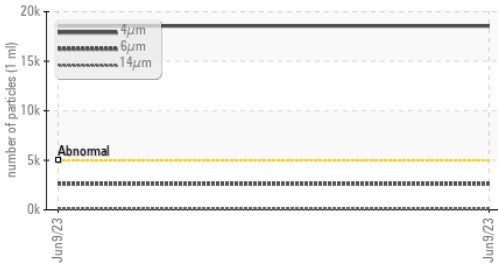

### Acid Number

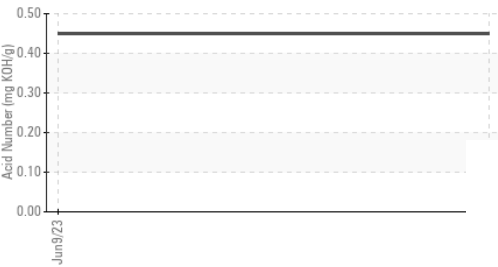

### Viscosity @ 40°C

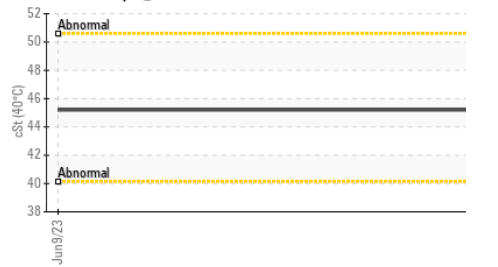

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.2	---	---

### SAMPLE IMAGES


method	limit/base	current	history1	history2	
Color				no image	no image
Bottom				no image	no image

### GRAPHS


#### Ferrous Alloys




#### Non-ferrous Metals

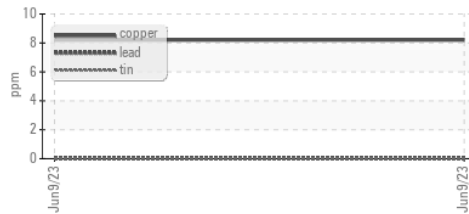

#### Viscosity @ 40°C

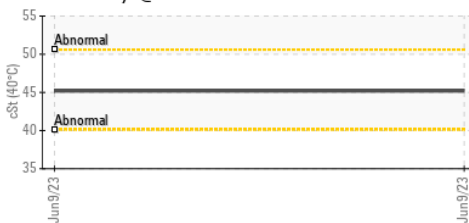

#### Particle Count

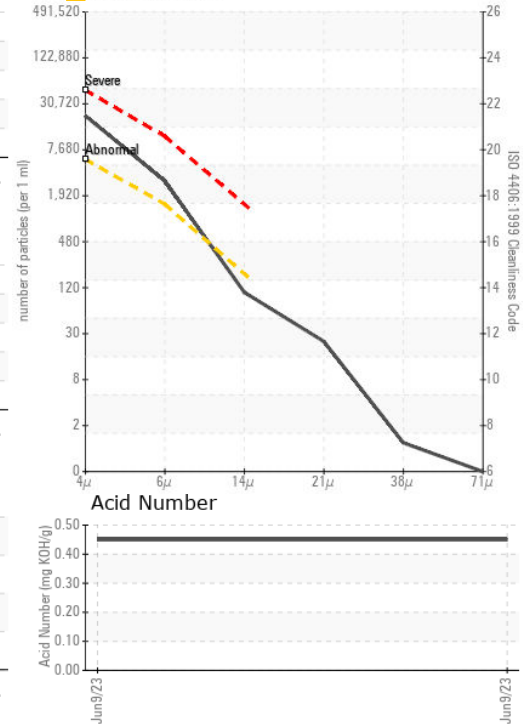

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0100287 **Received** : 13 Jun 2023  
**Lab Number** : 05872654 **Diagnosed** : 14 Jun 2023  
**Unique Number** : 10512438 **Diagnostician** : Wes Davis  
**Test Package** : IND 2

**NATIONAL MATERIAL PROCESSING**  
 4506 CLINE AVE  
 EAST CHICAGO, IN  
 US 46312  
 Contact: RYAN CANO  
 rcano@nmlp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: