




PROBLEM SUMMARY

Sample Rating Trend

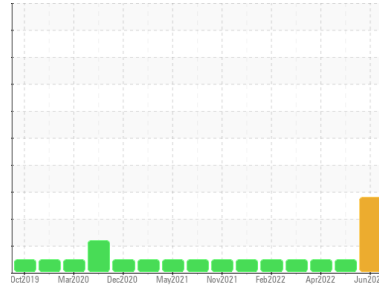


Machine Id
10889C

Component
Diesel Engine


Fluid
PETRO CANADA DURON SHP 15W40 (8 GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

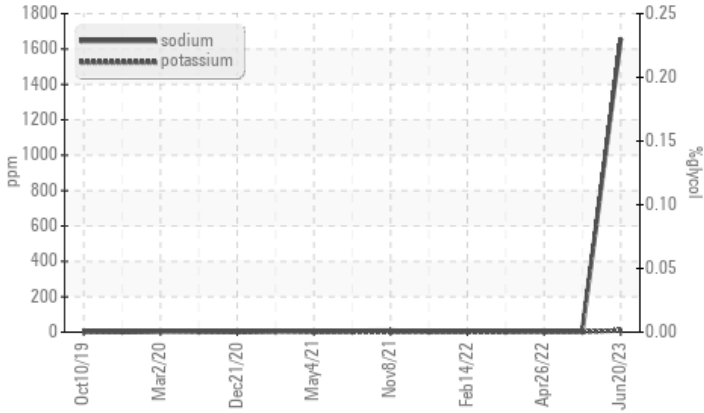

▲ Silicon (ppm)

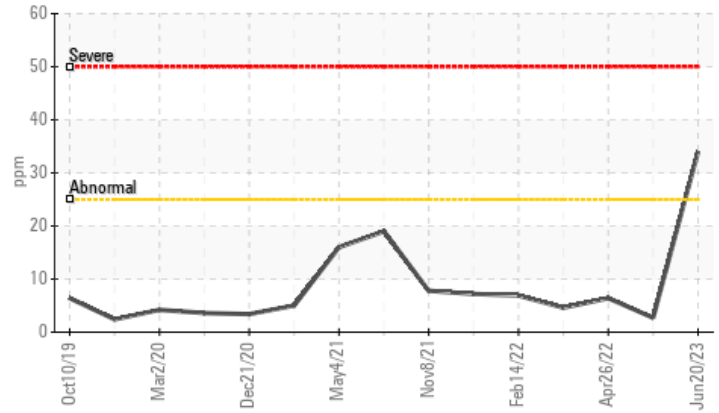

RECOMMENDATION

We advise that you check for possible coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	NORMAL
Silicon	ppm	ASTM D5185m	>25	▲ 34	3	5
Sodium	ppm	ASTM D5185m		▲ 1657	6	4

Customer Id: GFL019
Sample No.: GFL0048083
Lab Number: 05879368
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

03 Aug 2022 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



26 Apr 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



26 Apr 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

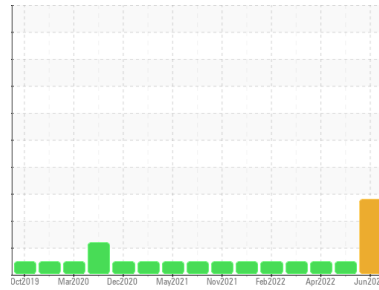

DIRT



Machine Id
10889C

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (8 GAL)

DIAGNOSIS

Recommendation

We advise that you check for possible coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		GFL0048083	GFL0039432	GFL0048146
Sample Date	Client Info		20 Jun 2023	03 Aug 2022	26 Apr 2022
Machine Age	hrs	Client Info	3676	0	3676
Oil Age	hrs	Client Info	3261	0	3261
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0

WEAR METALS

	method	limit/base	current	history 1	history 2	
Iron	ppm	ASTM D5185m	>75	57	<1	7
Chromium	ppm	ASTM D5185m	>5	6	<1	<1
Nickel	ppm	ASTM D5185m	>4	1	0	<1
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>15	4	<1	<1
Lead	ppm	ASTM D5185m	>25	5	1	1
Copper	ppm	ASTM D5185m	>100	2	<1	<1
Tin	ppm	ASTM D5185m	>4	<1	1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history 1	history 2	
Boron	ppm	ASTM D5185m	0	12	53	45
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	132	49	49
Manganese	ppm	ASTM D5185m	0	2	<1	<1
Magnesium	ppm	ASTM D5185m	1010	667	539	599
Calcium	ppm	ASTM D5185m	1070	1711	1372	1612
Phosphorus	ppm	ASTM D5185m	1150	751	718	814
Zinc	ppm	ASTM D5185m	1270	1161	873	958
Sulfur	ppm	ASTM D5185m	2060	3526	2450	2315

CONTAMINANTS

	method	limit/base	current	history 1	history 2	
Silicon	ppm	ASTM D5185m	>25	▲ 34	3	5
Sodium	ppm	ASTM D5185m		▲ 1657	6	4
Potassium	ppm	ASTM D5185m	>20	10	2	<1
Glycol	%	*ASTM D2982		NEG	NEG	NEG

INFRA-RED

	method	limit/base	current	history 1	history 2	
Soot %	%	*ASTM D7844	>6	0.1	0	0
Nitration	Abs/cm	*ASTM D7624	>20	14.7	6.8	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.7	19.8	19.8


FLUID DEGRADATION

	method	limit/base	current	history 1	history 2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.2	15.8	16.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	5.9	9.2	8.8




OIL ANALYSIS REPORT


▲ Silicon (ppm)

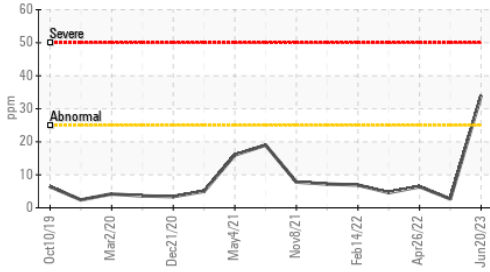


Glycol Contamination

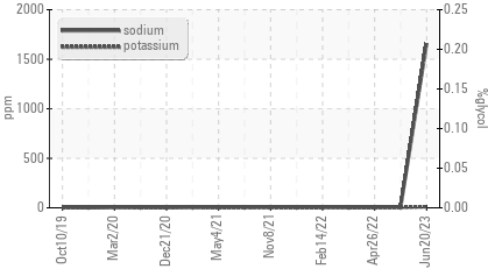

Viscosity @ 100°C

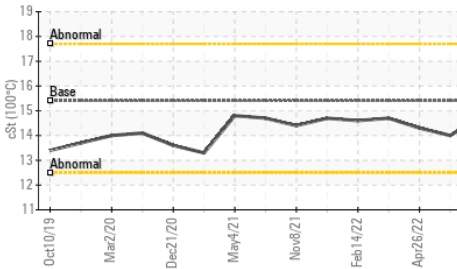

Glycol Contamination

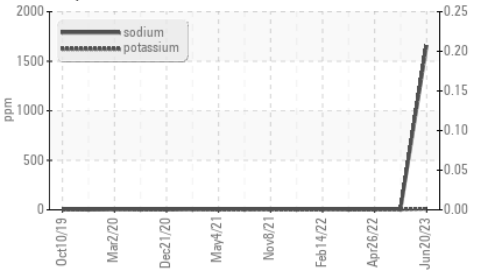

VISUAL


method	limit/base	current	history 1	history 2
White Metal	scalar *Visual	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar *Visual	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG
Free Water	scalar *Visual		NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt ASTM D445	15.4	14.8	14.0

GRAPHS


Ferrous Alloys

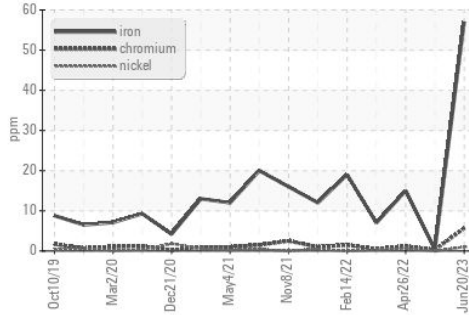


Non-ferrous Metals

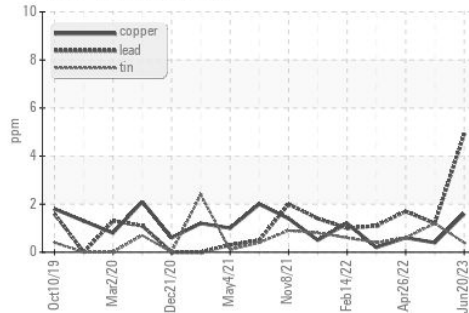

Viscosity @ 100°C

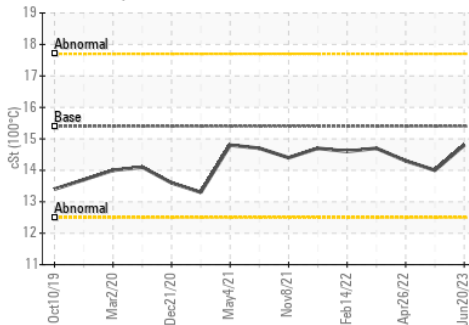

Base Number

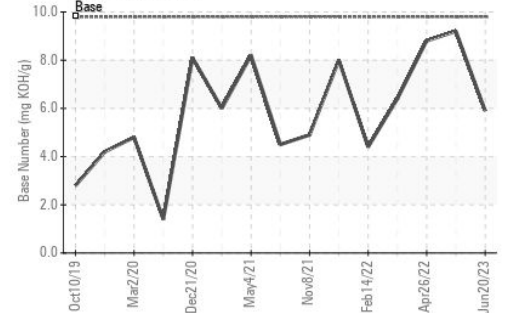

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0048083 Received : 21 Jun 2023
 Lab Number : 05879368 Diagnosed : 27 Jun 2023
 Unique Number : 10524471 Diagnostician : Jonathan Hester
 Test Package : FLEET (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GFL Environmental - 019 - Greenville/TriEast
 415 Staton Road
 Greenville, NC
 US 27834

Contact: Spencer Ligon
 spencer.ligon@gflenv.com

T: (800)207-6618

F: