




# OIL ANALYSIS REPORT

Sample Rating Trend

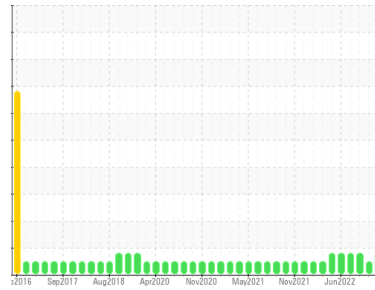

**WEAR**



Area  
**(YA133451)**

Machine Id  
**3686C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (32 QTS)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The chromium level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0082231</b>	GFL0082218	GFL0059682
Sample Date	Client Info		<b>22 Jun 2023</b>	17 May 2023	19 Oct 2022
Machine Age	hrs	Client Info	<b>15710</b>	1443	15711
Oil Age	hrs	Client Info	<b>825</b>	600	826
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>ABNORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>32</b>	21	15
Chromium	ppm	ASTM D5185m >4	<b>▲ 8</b>	4	3
Nickel	ppm	ASTM D5185m >2	<b>1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >9	<b>2</b>	4	2
Lead	ppm	ASTM D5185m >30	<b>9</b>	10	<1
Copper	ppm	ASTM D5185m >35	<b>30</b>	30	<b>▲ 80</b>
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>7</b>	5	10
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>65</b>	60	54
Manganese	ppm	ASTM D5185m 0	<b>2</b>	1	<1
Magnesium	ppm	ASTM D5185m 560	<b>655</b>	607	576
Calcium	ppm	ASTM D5185m 1510	<b>1874</b>	1795	1708
Phosphorus	ppm	ASTM D5185m 780	<b>870</b>	727	754
Zinc	ppm	ASTM D5185m 870	<b>1113</b>	1005	920
Sulfur	ppm	ASTM D5185m 2040	<b>2580</b>	2530	2560

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>7</b>	6	5
Sodium	ppm	ASTM D5185m	<b>14</b>	17	10
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.9</b>	12.4	11.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.9</b>	25.5	22.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.6</b>	22.3	19.8
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>4.4</b>	3.2	6.1







# OIL ANALYSIS REPORT

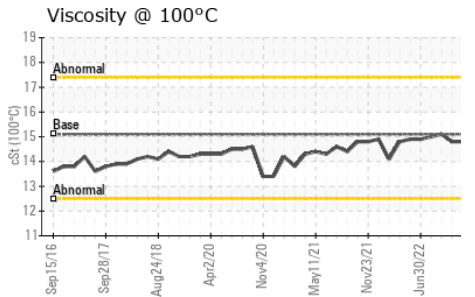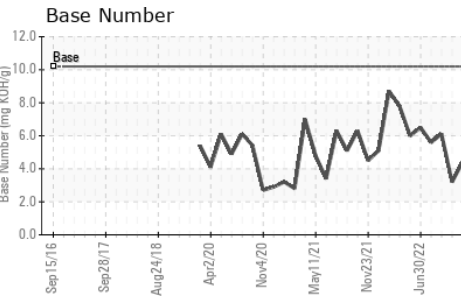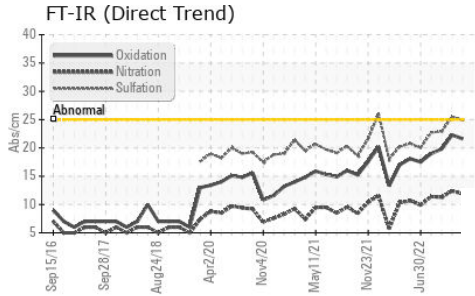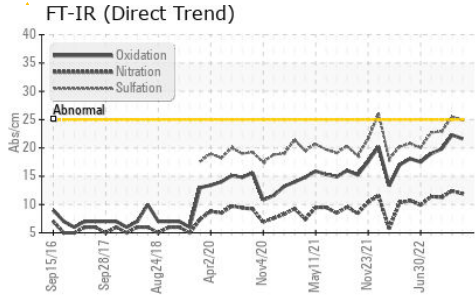

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.8	15.1

## GRAPHS

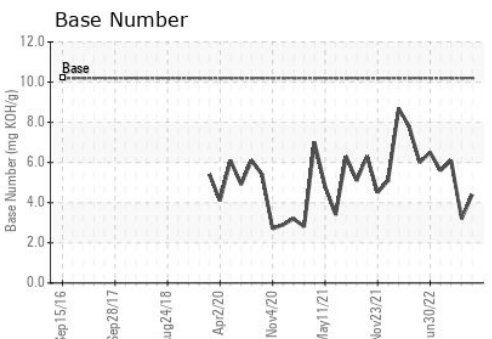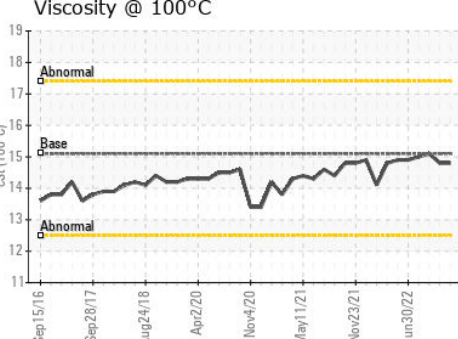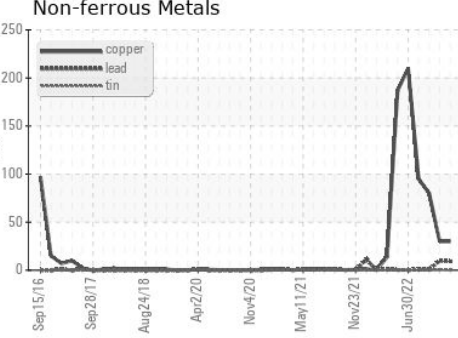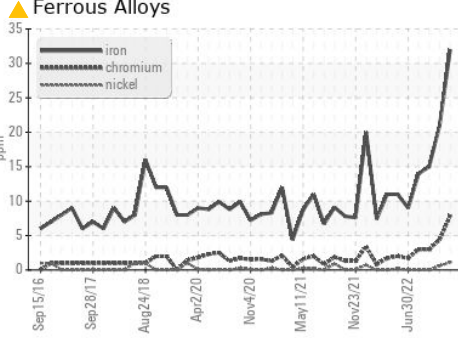

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0082231  
**Lab Number** : 05882598  
**Unique Number** : 10533081  
**Test Package** : FLEET  
**Received** : 23 Jun 2023  
**Tested** : 26 Jun 2023  
**Diagnosed** : 28 Jun 2023 - Don Baldrige

**GFL Environmental - 006 - Wilmington**  
 3618 US Highway 421 N  
 Wilmington, NC  
 US 28401  
 Contact: Eric Wood  
 eric.wood@gflenv.com  
 T: (717)723-1956  
 F: (910)762-6880

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)