




PROBLEM SUMMARY

Sample Rating Trend

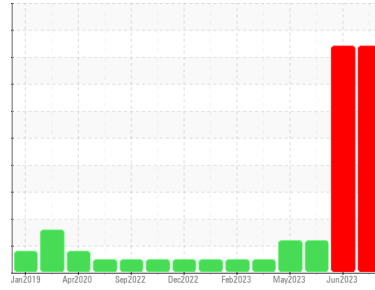

GLYCOL




Machine Id
726047-310048

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

Glycol Contamination

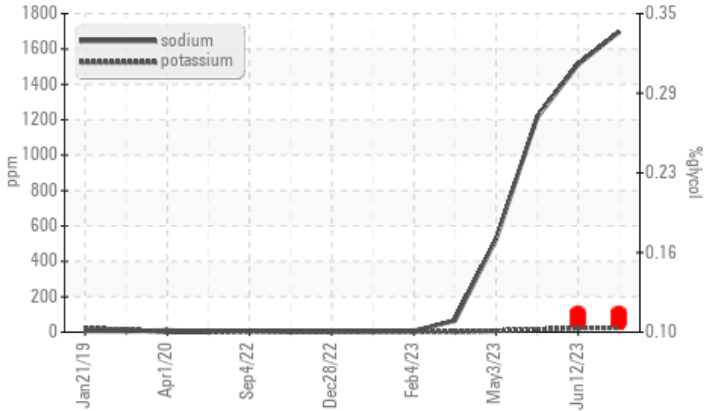

RECOMMENDATION

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	ABNORMAL
Sodium	ppm	ASTM D5185m		▲ 1698	▲ 1514	▲ 1214
Potassium	ppm	ASTM D5185m	>20	▲ 24	▲ 22	16
Glycol	%	*ASTM D2982		● 0.12	● 0.12	NEG

Customer Id: GFL821
 Sample No.: GFL0065442
 Lab Number: 05882913
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Flush System	---	---	?	We advise that you flush the component thoroughly before re-filling with oil.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

12 Jun 2023 Diag: Wes Davis

GLYCOL



We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition. All component wear rates are normal. Test for glycol is positive. There is a high concentration of glycol present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



23 May 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



03 May 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

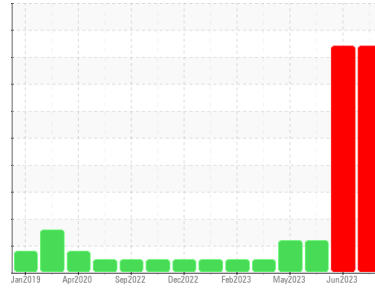

GLYCOL



Machine Id
726047-310048

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Test for glycol is positive. There is a high concentration of glycol present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0065442	GFL0065449	GFL0076800
Sample Date	Client Info	17 Jun 2023	12 Jun 2023	23 May 2023
Machine Age	hrs	18996	18950	18793
Oil Age	hrs	150	200	200
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		SEVERE	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<1.0	<1.0	<1.0

WEAR METALS

method	limit/base	current	history 1	history 2	
Iron	ppm	ASTM D5185m >110	35	30	20
Chromium	ppm	ASTM D5185m >4	4	4	2
Nickel	ppm	ASTM D5185m >2	<1	<1	<1
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >2	<1	<1	0
Aluminum	ppm	ASTM D5185m >25	6	5	6
Lead	ppm	ASTM D5185m >45	2	2	0
Copper	ppm	ASTM D5185m >85	2	2	<1
Tin	ppm	ASTM D5185m >4	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

method	limit/base	current	history 1	history 2	
Boron	ppm	ASTM D5185m 0	<1	<1	5
Barium	ppm	ASTM D5185m 0	5	5	0
Molybdenum	ppm	ASTM D5185m 60	223	209	176
Manganese	ppm	ASTM D5185m 0	1	1	<1
Magnesium	ppm	ASTM D5185m 1010	931	974	959
Calcium	ppm	ASTM D5185m 1070	1080	1108	1025
Phosphorus	ppm	ASTM D5185m 1150	908	976	1024
Zinc	ppm	ASTM D5185m 1270	1230	1277	1258
Sulfur	ppm	ASTM D5185m 2060	3650	3776	3716

CONTAMINANTS

method	limit/base	current	history 1	history 2	
Silicon	ppm	ASTM D5185m >30	8	8	8
Sodium	ppm	ASTM D5185m	1698	1514	1214
Potassium	ppm	ASTM D5185m >20	24	22	16
Glycol	%	*ASTM D2982	0.12	0.12	NEG

INFRA-RED

method	limit/base	current	history 1	history 2	
Soot %	%	*ASTM D7844 >3	0.8	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	14.3	13.4	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.2	22.2	20.7


FLUID DEGRADATION

method	limit/base	current	history 1	history 2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.9	18.2	16.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	11.6	11.4	12.4




OIL ANALYSIS REPORT


Glycol Contamination

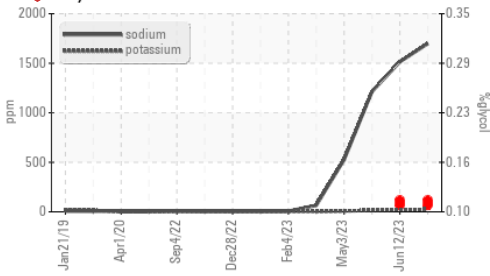

Base Number

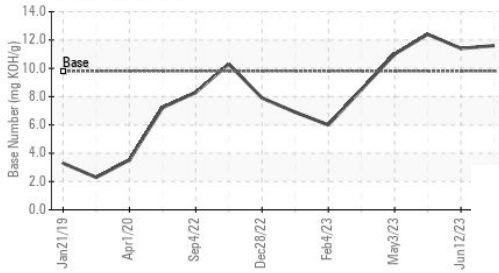

Viscosity @ 100°C

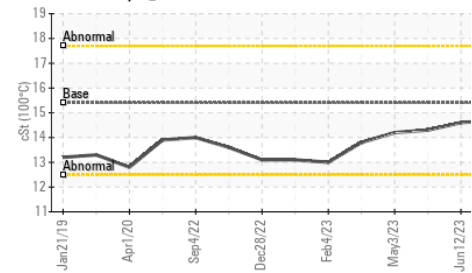


VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	15.4	14.7	14.6

GRAPHS


Ferrous Alloys

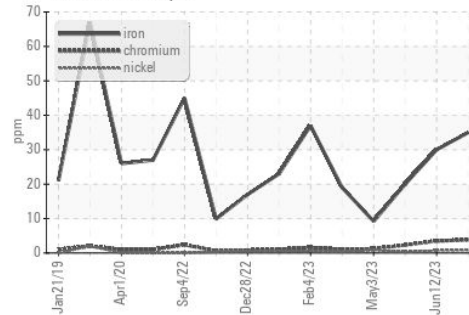


Non-ferrous Metals

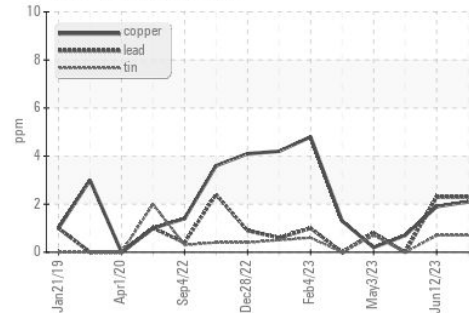

Viscosity @ 100°C

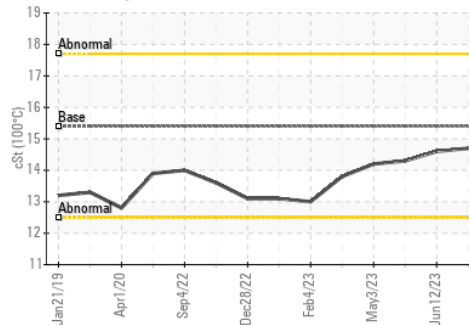

Base Number

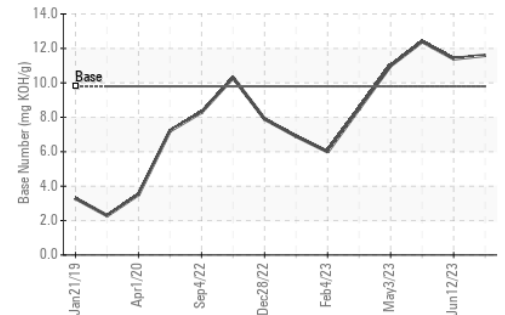

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0065442
 Lab Number : 05882913
 Unique Number : 10533396
 Test Package : FLEET

GFL Environmental - 821 - Ozarks Hauling
 33924 Olath Drive
 Lebanon, MO
 US 65536

Contact: Landen Johnson
 landen.johnson@gflenv.com
 T: (417)664-0010

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)