




PROBLEM SUMMARY

Sample Rating Trend

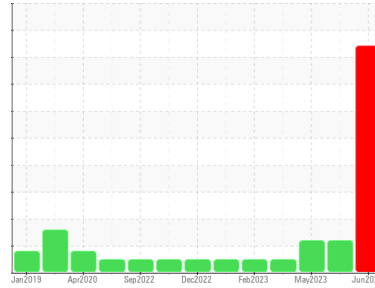

GLYCOL




Machine Id
726047-310048

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

Glycol Contamination

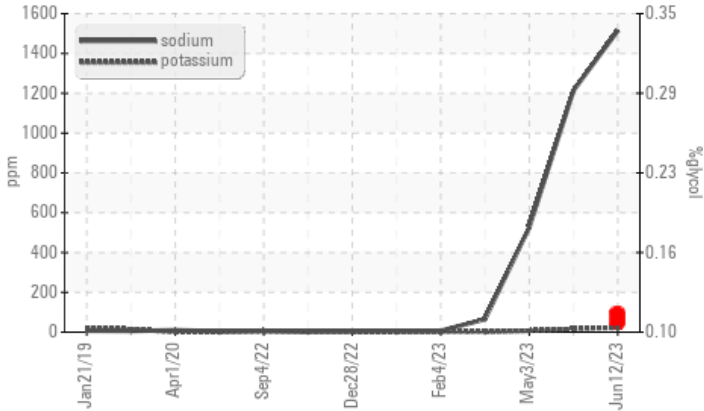

RECOMMENDATION

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	ABNORMAL	ABNORMAL
Sodium	ppm	ASTM D5185m		▲ 1514	▲ 1214	▲ 526
Potassium	ppm	ASTM D5185m	>20	▲ 22	16	7
Glycol	%	*ASTM D2982		● 0.12	NEG	NEG

Customer Id: GFL821
 Sample No.: GFL0065449
 Lab Number: 05882935
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Flush System	---	---	?	We advise that you flush the component thoroughly before re-filling with oil.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

23 May 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



03 May 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



08 Mar 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

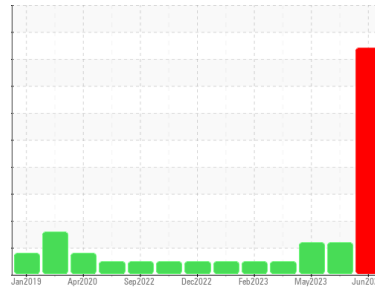

GLYCOL



Machine Id
726047-310048

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Test for glycol is positive. There is a high concentration of glycol present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0065449	GFL0076800	GFL0076850
Sample Date	Client Info	12 Jun 2023	23 May 2023	03 May 2023
Machine Age	hrs	18950	18793	18660
Oil Age	hrs	200	200	200
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		SEVERE	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<1.0	<1.0	<1.0

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >110	30	20	9
Chromium	ppm ASTM D5185m >4	4	2	1
Nickel	ppm ASTM D5185m >2	<1	<1	<1
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m >2	<1	0	0
Aluminum	ppm ASTM D5185m >25	5	6	3
Lead	ppm ASTM D5185m >45	2	0	<1
Copper	ppm ASTM D5185m >85	2	<1	<1
Tin	ppm ASTM D5185m >4	<1	0	<1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	<1	5	4
Barium	ppm ASTM D5185m 0	5	0	0
Molybdenum	ppm ASTM D5185m 60	209	176	107
Manganese	ppm ASTM D5185m 0	1	<1	<1
Magnesium	ppm ASTM D5185m 1010	974	959	956
Calcium	ppm ASTM D5185m 1070	1108	1025	1039
Phosphorus	ppm ASTM D5185m 1150	976	1024	1073
Zinc	ppm ASTM D5185m 1270	1277	1258	1304
Sulfur	ppm ASTM D5185m 2060	3776	3716	3915

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >30	8	8	5
Sodium	ppm ASTM D5185m	▲ 1514	▲ 1214	▲ 526
Potassium	ppm ASTM D5185m >20	▲ 22	16	7
Glycol	% *ASTM D2982	◆ 0.12	NEG	NEG

INFRA-RED

method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >3	0.6	0.4	0.2
Nitration	Abs/cm *ASTM D7624 >20	13.4	11.7	8.5
Sulfation	Abs/.1mm *ASTM D7415 >30	22.2	20.7	19.1


FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.2	16.2	14.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	11.4	12.4	11.0




OIL ANALYSIS REPORT


Glycol Contamination

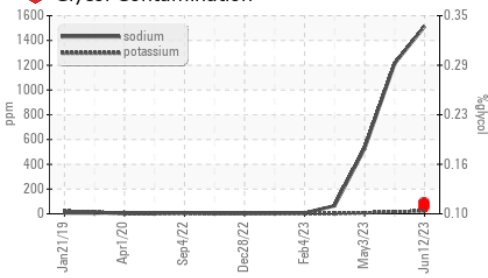

Base Number

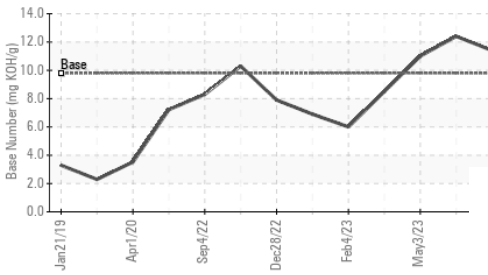





Viscosity @ 100°C

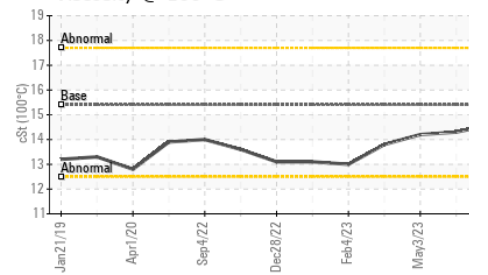

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	15.4	14.6	14.3

GRAPHS

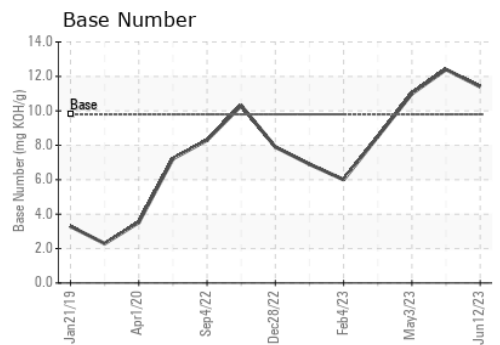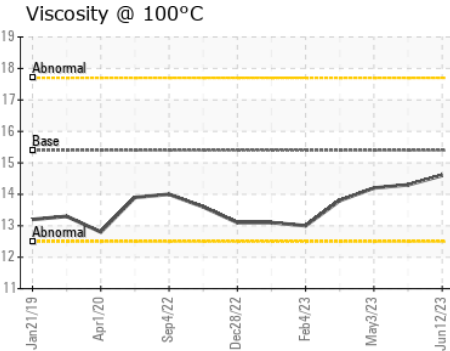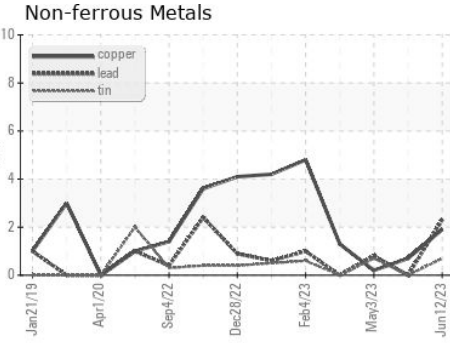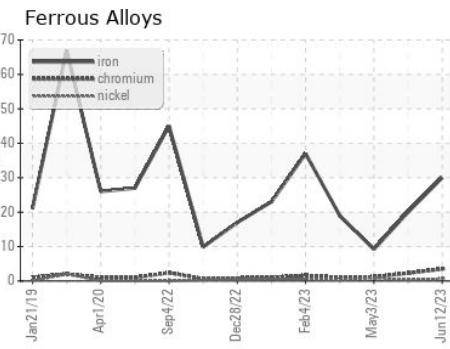

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0065449 **Received** : 26 Jun 2023
Lab Number : 05882935 **Diagnosed** : 03 Jul 2023
Unique Number : 10533418 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 821 - Ozarks Hauling
 33924 Olath Drive
 Lebanon, MO
 US 65536
 Contact: Landen Johnson
 landen.johnson@gflenv.com
 T: (417)664-0010
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)