




PROBLEM SUMMARY

Sample Rating Trend

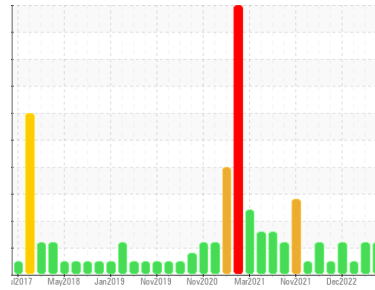

GLYCOL




Machine Id
10754

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (9 GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

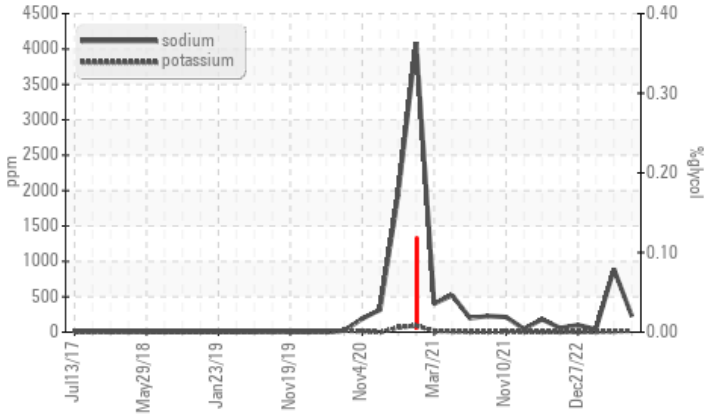

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	NORMAL
Sodium	ppm	ASTM D5185m	▲ 226	▲ 890	41

Customer Id: GFL034
Sample No.: GFL0071017
Lab Number: 05884915
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

07 Jun 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for possible coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



22 Feb 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



27 Dec 2022 Diag: Jonathan Hester

GLYCOL



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

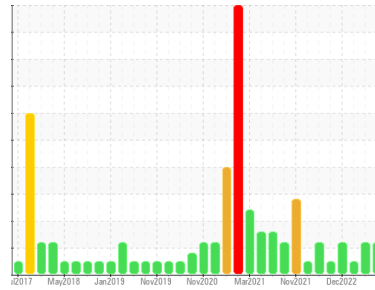

GLYCOL



Machine Id
10754

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (9 GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	GFL0071017	GFL0071014	GFL0070977
Sample Date	Client Info	21 Jun 2023	07 Jun 2023	22 Feb 2023
Machine Age	mls Client Info	140863	140863	140863
Oil Age	mls Client Info	10288	10288	10288
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >75	11	32	20
Chromium	ppm ASTM D5185m >5	<1	1	<1
Nickel	ppm ASTM D5185m >4	<1	<1	0
Titanium	ppm ASTM D5185m >2	3	2	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	4	6	2
Lead	ppm ASTM D5185m >25	0	4	0
Copper	ppm ASTM D5185m >100	17	3	0
Tin	ppm ASTM D5185m >4	1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	18	17	8
Barium	ppm ASTM D5185m 0	0	2	0
Molybdenum	ppm ASTM D5185m 60	60	99	54
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	884	973	806
Calcium	ppm ASTM D5185m 1070	1044	1184	1070
Phosphorus	ppm ASTM D5185m 1150	968	1158	883
Zinc	ppm ASTM D5185m 1270	1207	1400	1087
Sulfur	ppm ASTM D5185m 2060	3722	3989	2937

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	6	15	4
Sodium	ppm ASTM D5185m	▲ 226	▲ 890	41
Potassium	ppm ASTM D5185m >20	19	11	<1
Glycol	% *ASTM D2982	NEG	NEG	NEG

INFRA-RED

method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >6	0.5	0.9	0.2
Nitration	Abs/cm *ASTM D7624 >20	7.5	10.0	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	19.0	21.6	17.9


FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.5	16.9	13.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.9	9.0	7.9




OIL ANALYSIS REPORT


Glycol Contamination

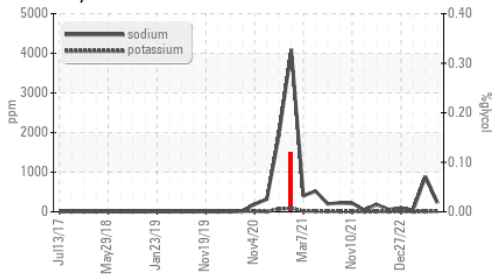

Viscosity @ 100°C

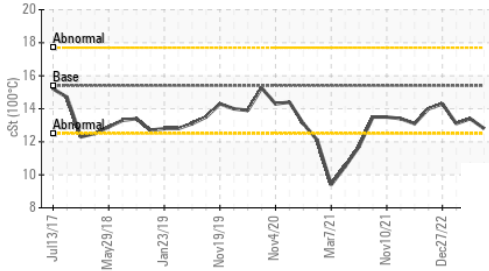

Glycol Contamination

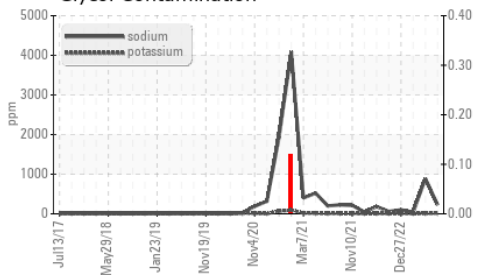


VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	13.4

GRAPHS


Ferrous Alloys

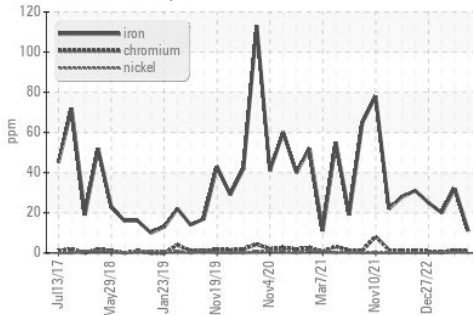


Non-ferrous Metals

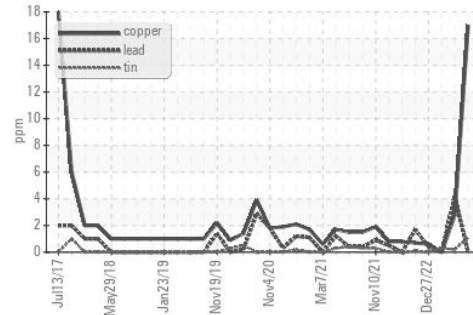

Viscosity @ 100°C

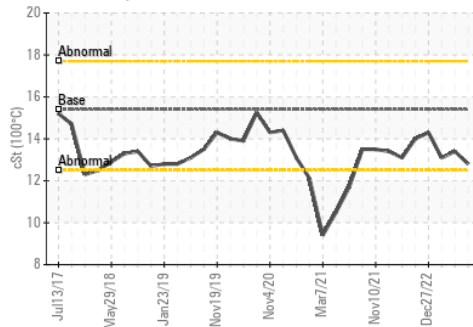

Base Number

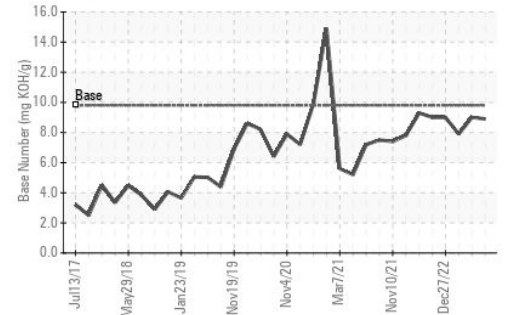

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0071017 Received : 27 Jun 2023
 Lab Number : 05884915 Diagnosed : 30 Jun 2023
 Unique Number : 10535398 Diagnostician : Angela Borella
 Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 034 - Delaware South
 28471 John J. Williams Hwy
 Millsboro, DE
 US 19966
 Contact: Brian Houston
 gary.houston@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)