




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

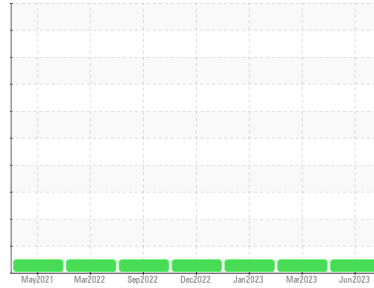

Machine Id  
**928030-1190**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Sample only )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>GFL0077521</b>	GFL0060760	GFL0060744
Sample Date	Client Info		<b>23 Jun 2023</b>	14 Mar 2023	13 Jan 2023
Machine Age	hrs	Client Info	<b>11277</b>	10839	10541
Oil Age	hrs	Client Info	<b>440</b>	298	590
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >120	<b>8</b>	7	10
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>7</b>	9	4
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	3
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	<b>43</b>	6	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	58	59
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>948</b>	909	840
Calcium	ppm	ASTM D5185m 1070	<b>1051</b>	1060	1071
Phosphorus	ppm	ASTM D5185m 1150	<b>1020</b>	935	905
Zinc	ppm	ASTM D5185m 1270	<b>1295</b>	1180	1119
Sulfur	ppm	ASTM D5185m 2060	<b>3767</b>	2841	2517

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	6
Sodium	ppm	ASTM D5185m	<b>3</b>	7	11
Potassium	ppm	ASTM D5185m >20	<b>10</b>	2	5

## INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >4	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	7.2	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.5</b>	18.7	19.1

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.4</b>	14.6	15.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	7.6	6.6







# OIL ANALYSIS REPORT

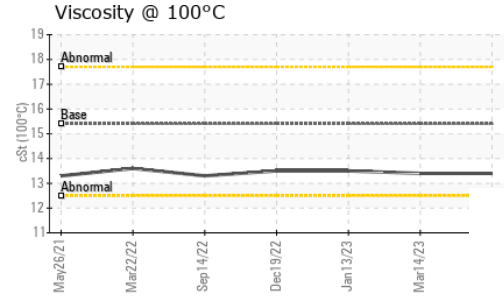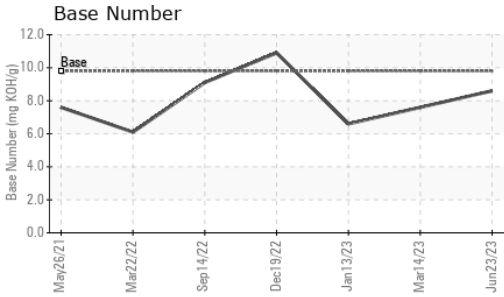

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.4	13.5

## GRAPHS

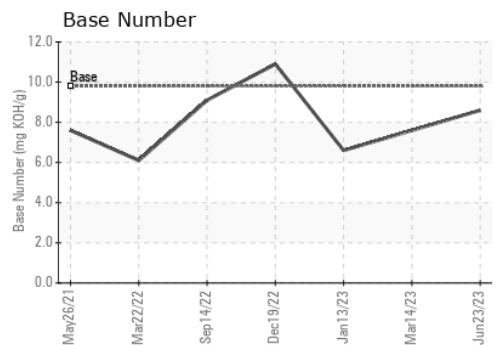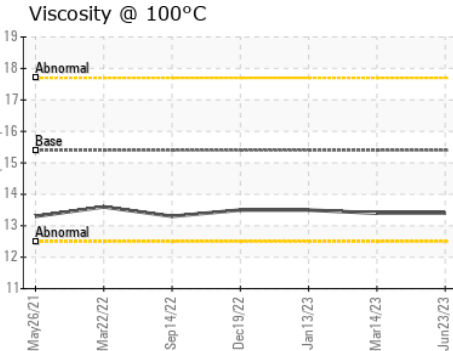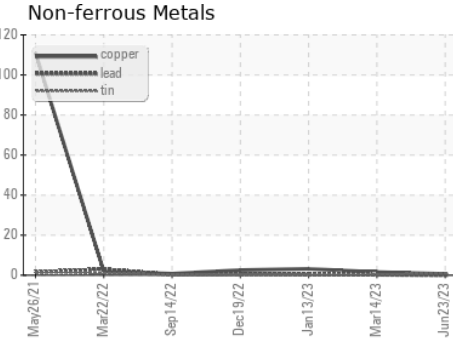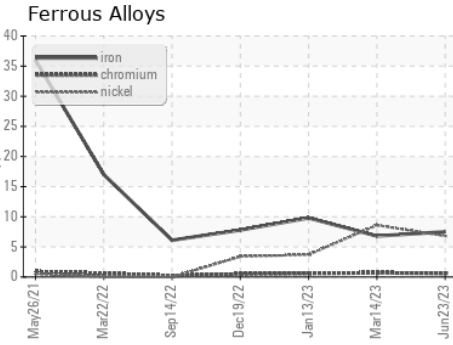

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0077521 **Received** : 27 Jun 2023  
**Lab Number** : **05884951** **Diagnosed** : 30 Jun 2023  
**Unique Number** : 10535434 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 625 - Harrison Hauling**  
 4102 Industrial Pkwy  
 Harrison, MI  
 US 48625  
 Contact: RON TROJANEK  
 ront@northern1.com  
 T: (231)624-0372  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)