




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

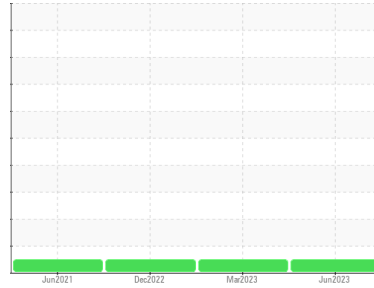

Machine Id
424019-856

Component
Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history 1	history 2	
Sample Number	Client Info	GFL0062187	GFL0062236	GFL0062169	
Sample Date	Client Info	25 Jun 2023	13 Mar 2023	19 Dec 2022	
Machine Age	hrs	Client Info	17075	16487	16102
Oil Age	hrs	Client Info	360	500	2649
Oil Changed	Client Info	Not Chngd	N/A	Not Chngd	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >100	24	51	35
Chromium	ppm ASTM D5185m >20	<1	2	<1
Nickel	ppm ASTM D5185m >4	0	<1	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	4	7	4
Lead	ppm ASTM D5185m >40	0	7	6
Copper	ppm ASTM D5185m >330	1	4	3
Tin	ppm ASTM D5185m >15	<1	1	<1
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m	8	11	12
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	66	78	80
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m	1014	1001	969
Calcium	ppm ASTM D5185m	1214	1338	1347
Phosphorus	ppm ASTM D5185m	1092	1125	1114
Zinc	ppm ASTM D5185m	1360	1347	1335
Sulfur	ppm ASTM D5185m	3698	2984	3511

CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	21	13	13
Sodium	ppm ASTM D5185m	2	0	0
Potassium	ppm ASTM D5185m >20	4	13	13

INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >3	1.2	2.5	1.6
Nitration	Abs/cm *ASTM D7624 >20	9.7	13.6	12.6
Sulfation	Abs/.1mm *ASTM D7415 >30	22.7	28.9	26.7

FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.3	21.9	21.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.1	6.7	8.2







OIL ANALYSIS REPORT

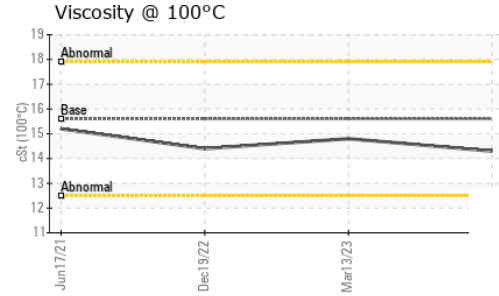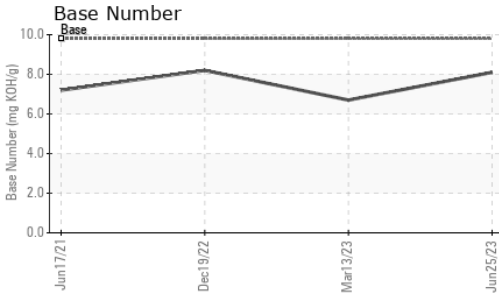

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.6	14.3	14.8	14.4

GRAPHS

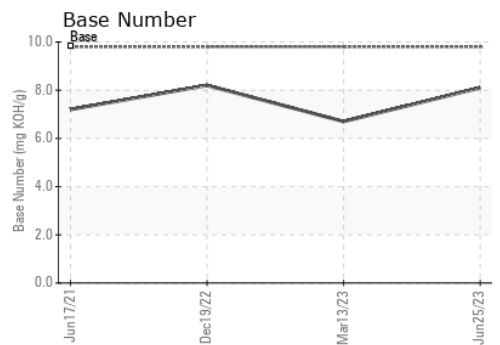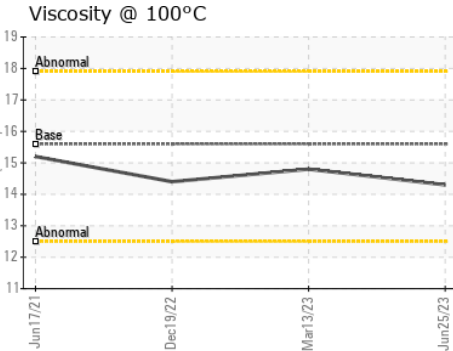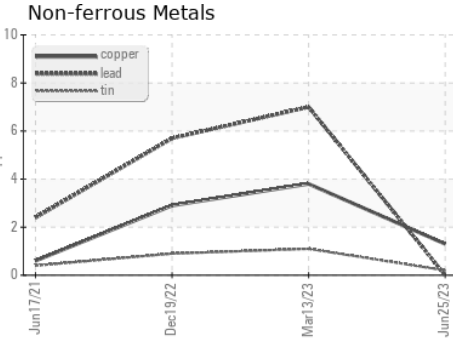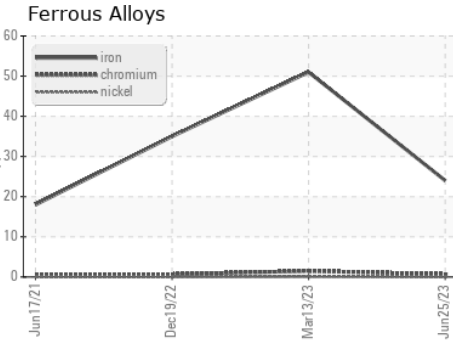

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0062187 **Received** : 29 Jun 2023
Lab Number : 05886469 **Diagnosed** : 02 Jul 2023
Unique Number : 10536952 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 626 - Cadillac Hauling
 1501 Ron Wilson St
 Cadillac, MI
 US 49601
 Contact: GARY BREWER
 gbrewerjr@gflenv.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)