




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

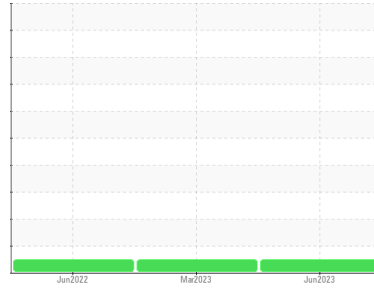

Machine Id
727021-523

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Sample only)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		GFL0077495	GFL0068183	GFL0047353
Sample Date	Client Info		27 Jun 2023	27 Mar 2023	07 Jun 2022
Machine Age	hrs	Client Info	33776	33436	32970
Oil Age	hrs	Client Info	478	466	0
Oil Changed	Client Info		Not Chngd	Not Chngd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>2.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >100	23	21	85
Chromium	ppm	ASTM D5185m >20	<1	<1	2
Nickel	ppm	ASTM D5185m >4	<1	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	<1	2	8
Lead	ppm	ASTM D5185m >40	<1	0	3
Copper	ppm	ASTM D5185m >330	1	1	4
Tin	ppm	ASTM D5185m >15	<1	<1	1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	6	4	11
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	59	60	65
Manganese	ppm	ASTM D5185m 0	<1	1	1
Magnesium	ppm	ASTM D5185m 1010	885	994	920
Calcium	ppm	ASTM D5185m 1070	1129	1170	1238
Phosphorus	ppm	ASTM D5185m 1150	1004	1049	1041
Zinc	ppm	ASTM D5185m 1270	1211	1315	1274
Sulfur	ppm	ASTM D5185m 2060	3087	3526	2996

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	4	6	5
Sodium	ppm	ASTM D5185m	2	4	6
Potassium	ppm	ASTM D5185m >20	2	1	1

INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >3	0.8	0.1	1.7
Nitration	Abs/cm	*ASTM D7624 >20	7.1	6.3	10.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.8	21.2	22.2

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.2	17.6	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.3	9.6	8.5







OIL ANALYSIS REPORT

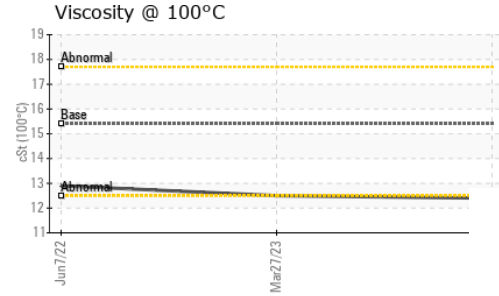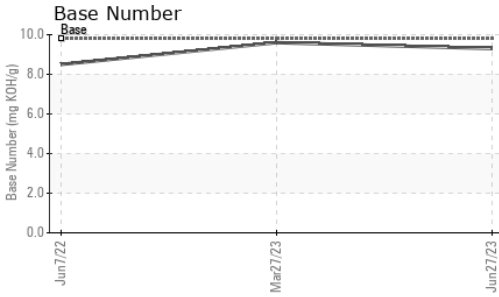

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.4	12.5	12.9

GRAPHS

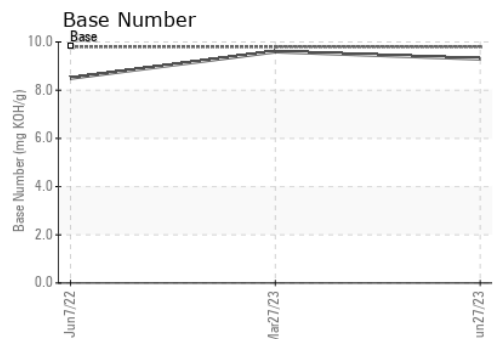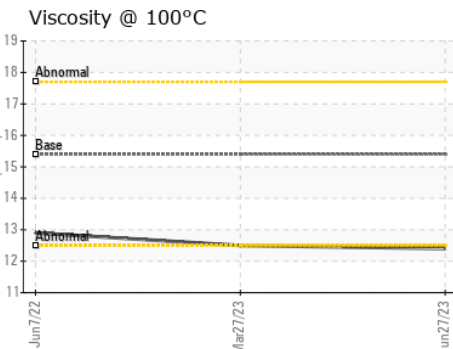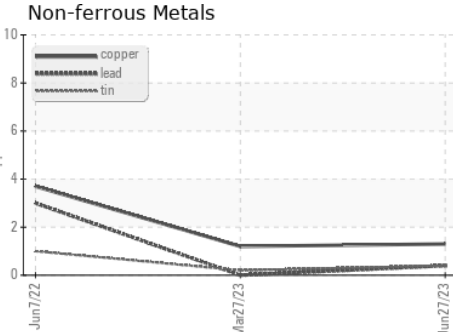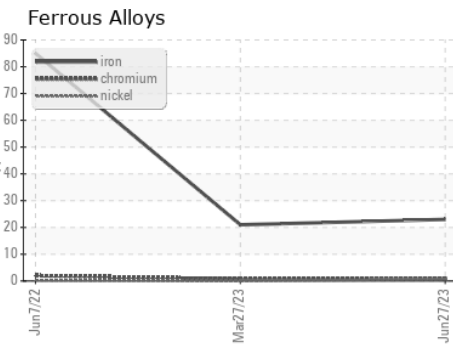

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0077495 **Received** : 29 Jun 2023
Lab Number : **05887283** **Diagnosed** : 03 Jul 2023
Unique Number : 10537766 **Diagnostician** : Jonathan Hester
Test Package : FLEET

GFL Environmental - 625 - Harrison Hauling
 4102 Industrial Pkwy
 Harrison, MI
 US 48625
 Contact: Glenda Standen
 gstanden@gflenv.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)