




# OIL ANALYSIS REPORT

Sample Rating Trend

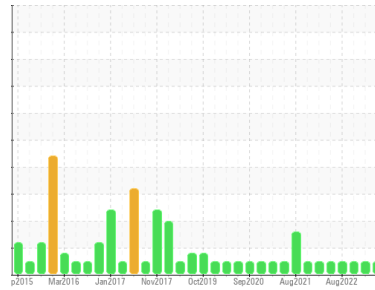

**NORMAL**



Machine Id  
**10618**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (6 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>GFL0083297</b>	GFL0069411	GFL0047965
Sample Date	Client Info	<b>29 Jun 2023</b>	14 Apr 2023	08 Feb 2023
Machine Age	hrs	<b>14699</b>	622	14699
Oil Age	hrs	<b>120</b>	14699	480
Oil Changed	Client Info	<b>N/A</b>	N/A	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history 1	history 2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m >90	<b>6</b>	15	25
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	3
Nickel	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	6	4
Lead	ppm ASTM D5185m >40	<b>0</b>	0	1
Copper	ppm ASTM D5185m >330	<b>1</b>	6	32
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	7	5
Barium	ppm ASTM D5185m 0	<b>14</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>51</b>	62	64
Manganese	ppm ASTM D5185m 0	<b>0</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>839</b>	883	707
Calcium	ppm ASTM D5185m 1070	<b>940</b>	1190	1281
Phosphorus	ppm ASTM D5185m 1150	<b>901</b>	1020	855
Zinc	ppm ASTM D5185m 1270	<b>1135</b>	1245	1182
Sulfur	ppm ASTM D5185m 2060	<b>3248</b>	3567	3275

## CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m >25	<b>3</b>	4	8
Sodium	ppm ASTM D5185m	<b>2</b>	3	4
Potassium	ppm ASTM D5185m >20	<b>10</b>	2	1

## INFRA-RED



method	limit/base	current	history 1	history 2
Soot %	% *ASTM D7844 >6	<b>0.3</b>	0.4	0.8
Nitration	Abs/cm *ASTM D7624 >20	<b>7.0</b>	8.7	10.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.0</b>	17.8	21.1

## FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.1</b>	15.6	16.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.6</b>	6.5	6.7







# OIL ANALYSIS REPORT

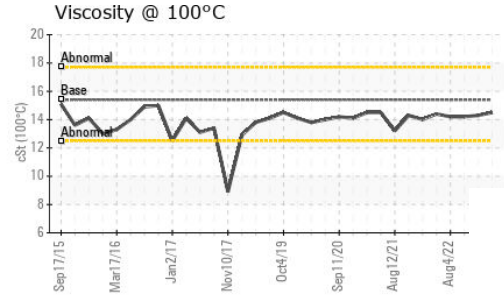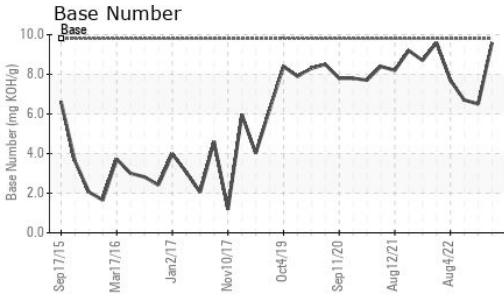

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.5</b>	14.3	14.2

## GRAPHS

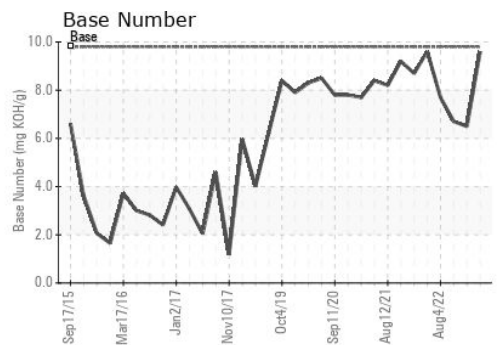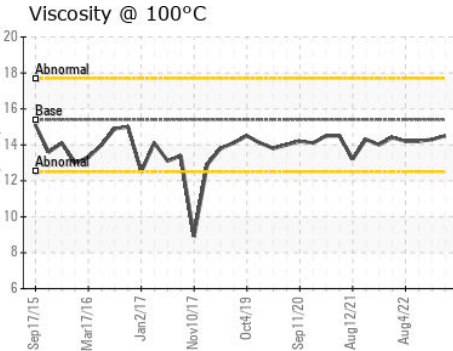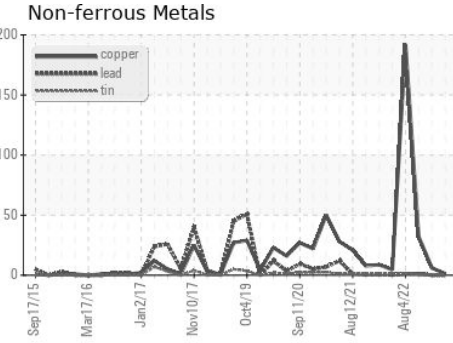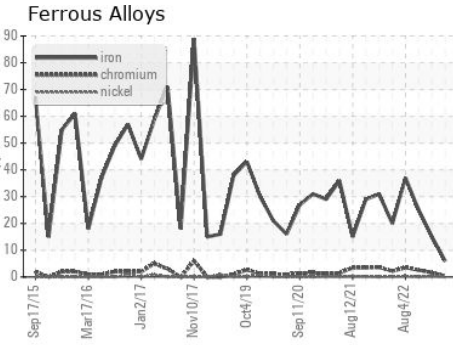

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0083297 **Received** : 30 Jun 2023  
**Lab Number** : **05887634** **Diagnosed** : 02 Jul 2023  
**Unique Number** : 10538117 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 017 - Durham**  
 148 Stone Park Court  
 Durham, NC  
 US 27703  
 Contact: Shane Parks  
 shane.parks@gflenv.com  
 T: (919)596-1363  
 F: (919)598-1852

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)