




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
425020-723
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

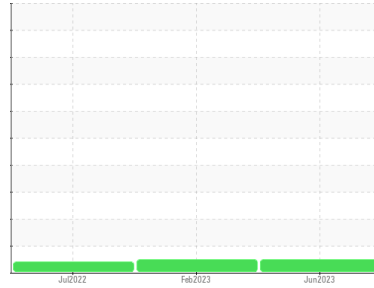

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		GFL0062195	GFL0060750	GFL0052042
Sample Date	Client Info		26 Jun 2023	01 Feb 2023	13 Jul 2022
Machine Age	mls	Client Info	285177	12978	265416
Oil Age	mls	Client Info	1078	0	0
Oil Changed	Client Info		Not Chngd	Changed	Changed
Sample Status			NORMAL	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>3.0	<1.0	<1.0	0.3
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >120	8	19	3
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >5	0	<1	<1
Titanium	ppm	ASTM D5185m >2	<1	6	<1
Silver	ppm	ASTM D5185m >2	0	0	1
Aluminum	ppm	ASTM D5185m >20	0	2	1
Lead	ppm	ASTM D5185m >40	<1	2	<1
Copper	ppm	ASTM D5185m >330	<1	1	<1
Tin	ppm	ASTM D5185m >15	<1	1	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	8	45	111
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	55	21	16
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	838	540	510
Calcium	ppm	ASTM D5185m 1070	1087	1554	1430
Phosphorus	ppm	ASTM D5185m 1150	960	787	677
Zinc	ppm	ASTM D5185m 1270	1141	981	823
Sulfur	ppm	ASTM D5185m 2060	3254	3644	3344

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	3	7	4
Sodium	ppm	ASTM D5185m	<1	3	1
Potassium	ppm	ASTM D5185m >20	1	2	2

INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844 >4	0.1	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	6.7	10.2	6.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.1	23.0	18.4

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.6	16.9	12.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.9	5.7	9.0







OIL ANALYSIS REPORT

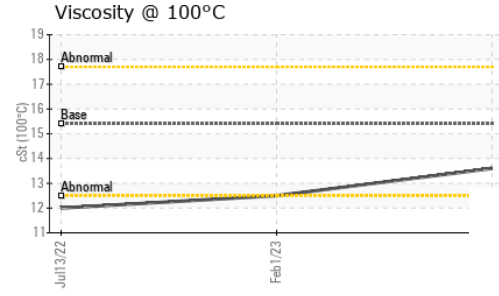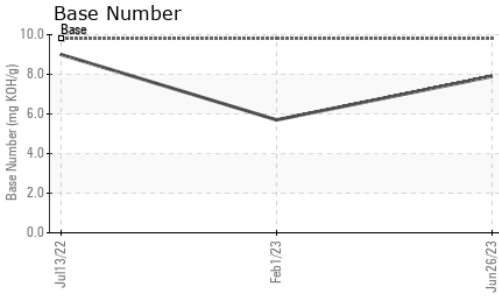

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	12.5 ▲ 12.0

GRAPHS

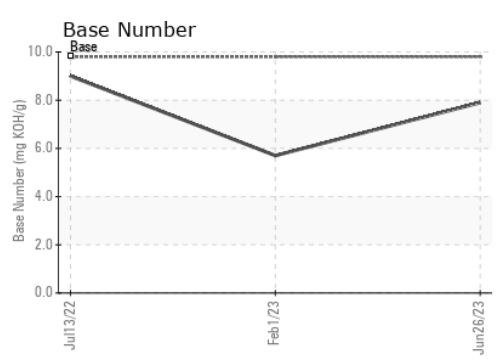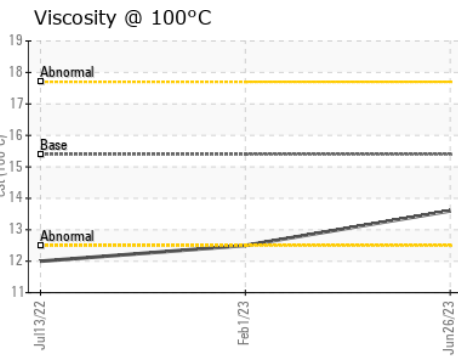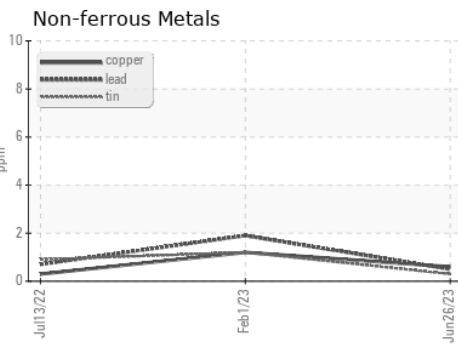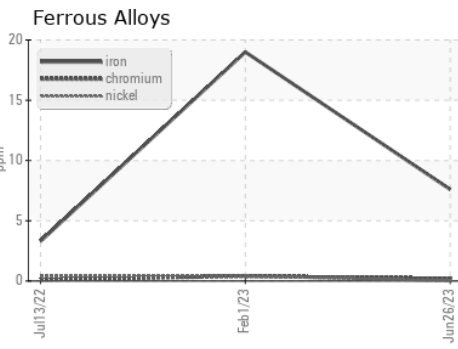

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0062195 **Received** : 30 Jun 2023
Lab Number : **05887723** **Diagnosed** : 02 Jul 2023
Unique Number : 10538206 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 626 - Cadillac Hauling
 1501 Ron Wilson St
 Cadillac, MI
 US 49601
 Contact: GARY BREWER
 gbrewerjr@gflenv.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)