




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

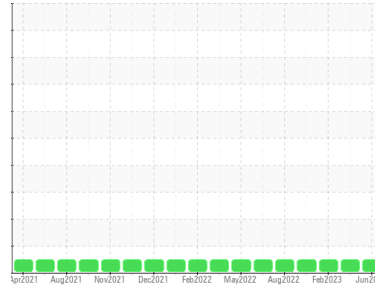

Machine Id
910013 AUTOCAR isx-12
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (48 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number	Client Info			GFL0087117	GFL0056683	GFL0056659
Sample Date	Client Info			28 Jun 2023	14 Apr 2023	09 Feb 2023
Machine Age	hrs	Client Info		8380	7846	7371
Oil Age	hrs	Client Info		534	475	768
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history 1	history 2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>100	10	12	15
Chromium	ppm	ASTM D5185m	>20	1	3	1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	2	2
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	<1	<1	<1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	250	0	7	7
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	60	55	60
Manganese	ppm	ASTM D5185m		<1	2	<1
Magnesium	ppm	ASTM D5185m	450	904	807	887
Calcium	ppm	ASTM D5185m	3000	1050	996	1029
Phosphorus	ppm	ASTM D5185m	1150	989	850	952
Zinc	ppm	ASTM D5185m	1350	1207	1083	1151
Sulfur	ppm	ASTM D5185m	4250	3270	3012	3482



CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	4	6	3
Sodium	ppm	ASTM D5185m	>216	3	4	4
Potassium	ppm	ASTM D5185m	>20	2	3	3

INFRA-RED		method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844	>3	0.6	0.7	1.1
Nitration	Abs/cm	*ASTM D7624	>20	6.9	6.8	8.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	19.2	20.0

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.5	14.2	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.4	8.3	8.6







OIL ANALYSIS REPORT

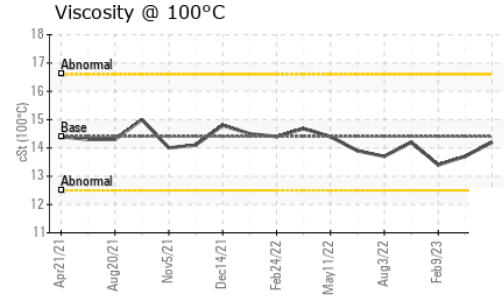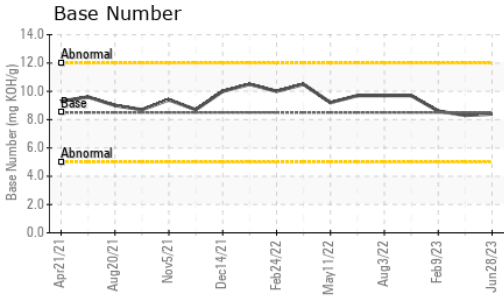

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.2	13.7	13.4

GRAPHS

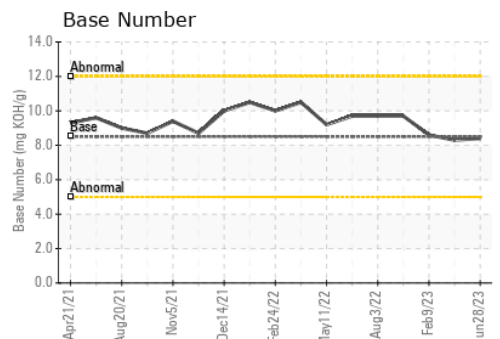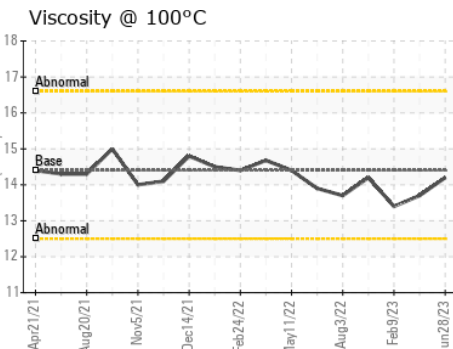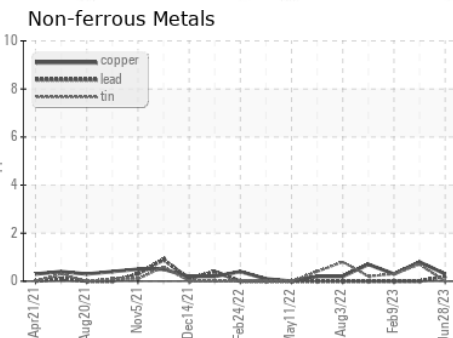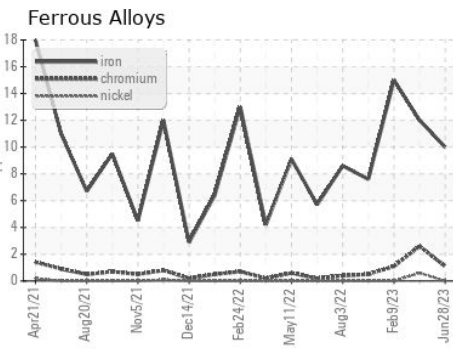

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087117 **Received** : 30 Jun 2023
Lab Number : **05887740** **Diagnosed** : 02 Jul 2023
Unique Number : 10538223 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 001 - Raleigh(CNG)
 3741 Conquest Drive
 Garner, NC
 US 27529
 Contact: Craig Johnson
 craig.johnson@gflenv.com
 T: (919)662-7100
 F: (919)662-7130

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)