




# OIL ANALYSIS REPORT

Sample Rating Trend

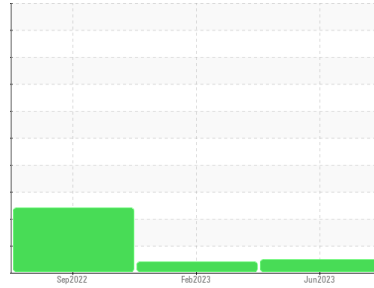

**NORMAL**



Machine Id  
**254000-1100**

Component  
**Gasoline Engine**

Fluid  
**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number	Client Info		<b>GFL0064486</b>	GFL0064360	GFL0058386
Sample Date	Client Info		<b>26 Jun 2023</b>	06 Feb 2023	29 Sep 2022
Machine Age	mls	Client Info	<b>186115</b>	174979	20839
Oil Age	mls	Client Info	<b>2277</b>	0	574
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ATTENTION	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history 1	history 2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	0.9	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >150	<b>31</b>	38	59
Chromium	ppm	ASTM D5185m >20	<b>1</b>	2	1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>9</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>3</b>	3	10
Lead	ppm	ASTM D5185m >50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >155	<b>28</b>	33	<1
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	<b>60</b>	35	0
Barium	ppm	ASTM D5185m	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m	<b>93</b>	230	77
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	<b>622</b>	472	959
Calcium	ppm	ASTM D5185m	<b>1458</b>	1242	1141
Phosphorus	ppm	ASTM D5185m 760	<b>648</b>	615	1033
Zinc	ppm	ASTM D5185m 830	<b>847</b>	780	1273
Sulfur	ppm	ASTM D5185m 2770	<b>2839</b>	2073	2999

## CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >30	<b>12</b>	13	7
Sodium	ppm	ASTM D5185m >400	<b>4</b>	2	▲ 159
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	▲ 29

## INFRA-RED



	method	limit/base	current	history 1	history 2
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	1.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.6</b>	13.5	13.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.5</b>	23.2	26.3

## FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.7</b>	19.4	21.0
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>9.8</b>	5.1	8.8







# OIL ANALYSIS REPORT

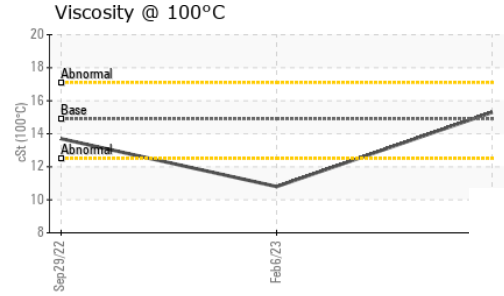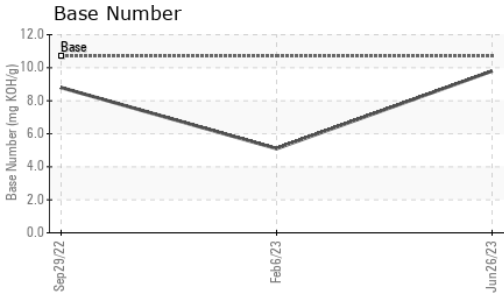

VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2	
Visc @ 100°C	cSt	ASTM D445	14.9	15.3 ▲	10.8	13.7

## GRAPHS

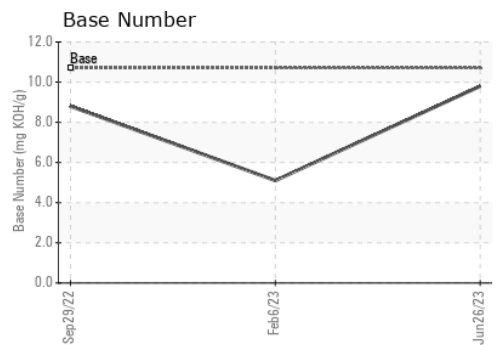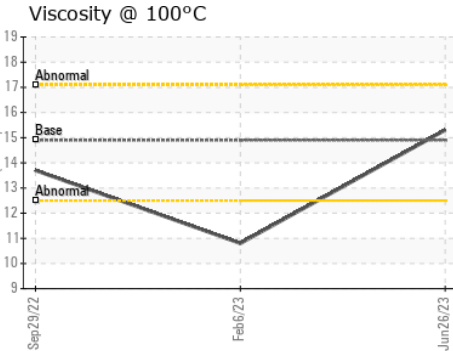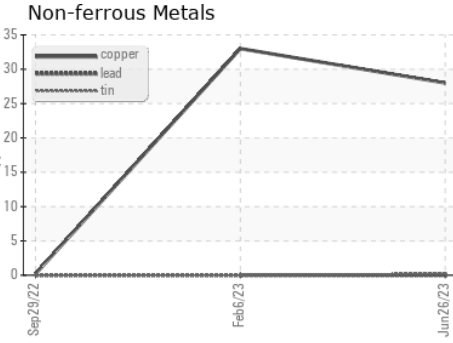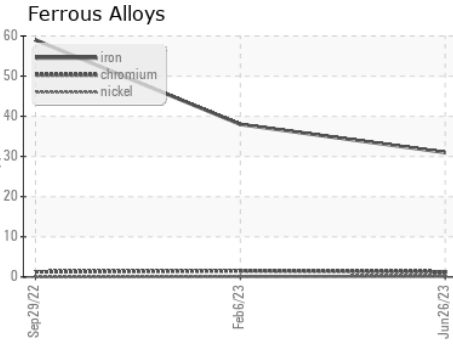

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0064486 **Received** : 30 Jun 2023  
**Lab Number** : 05888209 **Diagnosed** : 04 Jul 2023  
**Unique Number** : 10538692 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 624 - Elmira Hauling**  
 10164 M-32  
 Elmira, MI  
 US 49730  
 Contact: ANDY GROBASKI  
 andyg@americanwaste.org  
 T: (989)370-2941  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)